



actual size

Oscillator JOD75 · MESA · LVDS

- SMD Low Voltage LVDS Oscillator, 7.0 x 5.0 mm
- internal inverted MESA blank
- very low phase noise, no PLL
- wide temperature range
- ceramic / metal package



RoHS compliant



Pb free



REACH compliant



Conflict mineral free

GENERAL DATA

TYPE		JOD75 MESA 3.3 V & 2.5 V LVDS XO
frequency range		170.0 ~ 270.0 MHz
higher frequencies on request		270.0 ~ 320.0 MHz
frequency stability over all*		± 50 ppm ~ ± 100 ppm (see table 1)
current consumption		40 mA max. (3.3 V) / 35 mA max. (2.5 V)
supply voltage V _{DC}		3.3 V ± 5% / 2.5 V ± 5%
temperature	operating	-20 °C ~ +70 °C ~ -40 °C ~ +125 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	< 0.4 ns (20% ~ 80% of V _{pp})
	load nom.	100 Ω differential
	swing	0.33 V _{p-p} typ. / 0.25 V _{p-p} min.
	offset voltage	1.25 V ± 0.125 V
output enable time max.		10 ms
output disable time max.		200 ns
start-up time max.		10 ms
standby function		stop
standby current max.		30 µA
phase jitter 12 kHz ~ 20.0 MHz		< 0.5 ps RMS
period jitter		< 5.0 ps RMS
symmetry at 50% of V _{pp}		45% ~ 55% max. / 40% ~ 60% max. T2 & T3

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

** ask if available

TABLE 1: FREQUENCY STABILITY CODE


frequency stability code / temp. code*	A ± 100 ppm	B ± 50 ppm		
-20 °C ~ +70 °C	○	○		
-40 °C ~ +85 °C	T1	◇		
-40 °C ~ +105 °C	T2**	○		
-40 °C ~ +125 °C	T3**	○		

◇ standard ○ available

ENABLE / DISABLE FUNCTION


pin #1 (e/d control)	pin #4 / #5 (outputs)
open or ≥ 0.7 V _{CC}	enable
gnd or < 0.3 V _{CC}	high impedance

REFLOW SOLDERING PROFILE

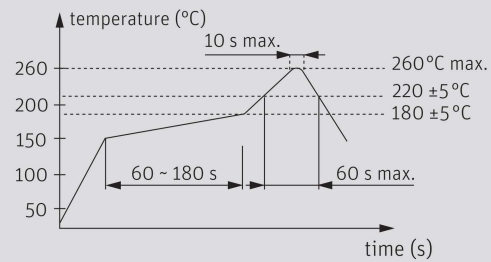


note: parts are also suitable for soldering systems with lead (Pb) content


DIMENSIONS




top view



side view



bottom view



pad layout

- # 1: e/d
- # 2: nc
- # 3: ground
- # 4: output 1
- # 5: output 2
- # 6: V_{CC}

pin connection

in mm




ORDER INFORMATION

0	frequency	type	frequency stability code	supply voltage code	option	MESA identifier
Oscillator	170.0 ~ 270.0 MHz > 270.0 MHz ask if available	JOD75	see table 1	3.3 = 3.3 V 2.5 = 2.5 V	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C T2 = -40 °C ~ +105 °C T3 = -40 °C ~ +125 °C	M = MESA blank

Example: 0 270.0-JOD75-B-3.3-T1-M-LF (Suffix LF = RoHS compliant / Pb free)

Oscillator JOD75 · MESA · LVDS

TAPING SPECIFICATION

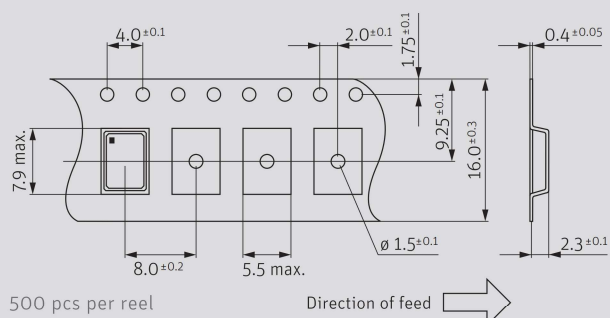

in mm

PACKAGING NOTE

- standard packing unit is 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

MARKING

type / stability code / voltage code

frequency

company code / date code

date code: A ~ M: Jan. - Dec.

1: 2021 2: 2022 3: 2023 4: 2024 5: 2025 6: 2026

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M