


## FEATURES

- SHIELDED POWER INDUCTOR
- HIGH TEMPERATURE (+150°C)
- HIGH CURRENT AND LOW DCR
- LOW NOISE GAPLESS CONSTRUCTION
- AEC-Q200 QUALIFIED\*

Designed for Automotive Applications

RoHS Compliant

includes all homogeneous materials



## CHARACTERISTICS (53 ~ 106)

\*See Part Number System for Details

Case Code	63A	64A	75A	84A	85A	104A	105A	104A...L
Inductance Range (μH)	0.68, 1.0	10	4.7 ~ 48	100	2.5 ~ 48	97	1.5 ~ 32.5	0.68, 1.0
Operating Temperature Range	-40°C ~ +150°C (Including Self-Heating)							
Inductance Tolerance	±20% (M)							
Operating Voltage**	35Vop max.							


\*\*Please contact NIC for the operating voltage for individual items.

Test Item <sup>1</sup>	Test Method & Conditions	Specification
High Temperature Endurance	Temperature: 150°C ± 2°C (including self-heating) Applied current: DC 1.0A Duration: 2,000 hours	Inductance: Within ±10% of initial value DC Resistance: Within ±5% of initial value Physical: Coils shall not have any abnormality in appearance and construction.
Heat Resistance	Temperature: 150°C ± 2°C Duration: 2,000 hours	
Damp Heat (Loaded)	Temperature/Humidity: 85°C ± 2°C/85%RH Applied current: DC 1.0A Duration: 2,000 hours	
Moisture Resistance	Temperature/Humidity: 85°C ± 2°C/85%RH Duration: 2,000 hours	
Cold Resistance	Temperature: -40°C ± 2°C Duration: 2,000 hours	
Thermal Shock	Temperature: -40°C ± 2°C 10 min., 5 ~ 35°C 0 ~ 5min., 150°C ± 2°C 10 min. Duration: 2,000 cycles	
Vibration Resisitance	Frequency: Log sweep 10 ~ 55 ~ 10Hz/1 min. Amplitude: 1.5mm max in 3 directions (2 hours each) Duration: 6 hours total	

\*NPIM\_A series meets the testing requirements of AEC-Q200 Table 5, contact NIC for test data.

<sup>1</sup>Pre-treatment at +85°C±2°C, 85% RH, 168 hours and reflow aging 3 times.

## PART NUMBER SYSTEM

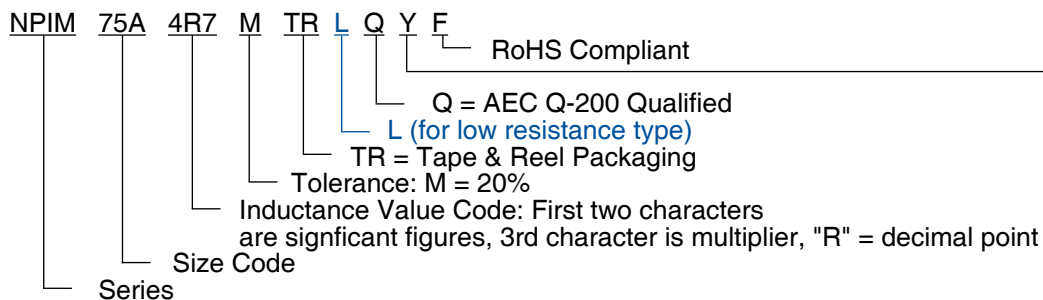


"Y" denotes suitable for automotive equipment, sourced to special production and inspection at TS-16949 certified production site.



## DIMENSIONS (mm)

Series	A	B	C	D	E	t	F	G	H
NPIM63A	6.5 ± 0.4	6.0 ± 0.4	3.0 max.	1.5 ± 0.4	3.0 ± 0.3	0.05 min.	2.8	10	3.6
NPIM64A	6.5 ± 0.4	6.0 ± 0.4	4.5 max.	1.5 ± 0.4	3.0 ± 0.3	0.05 min.	2.8	10	3.6
NPIM75A	7.5 ± 0.4	7.0 ± 0.4	5.4 max.	2.0 ref.	3.0 ± 0.3	0.10 min.	2.8	10	3.6
NPIM84A	8.5 ± 0.4	8.0 ± 0.4	5.0 max.	2.0 ref.	3.0 ± 0.3	0.1 min.	3.8	12.4	4.0
NPIM85A	8.5 ± 0.4	8.0 ± 0.4	5.4 max.	2.0 ref.	3.0 ± 0.3	0.1 min.	3.8	12.4	4.0
NPIM104A	10.7 ± 0.5	10.0 ± 0.4	5.0 max.	2.0 ref.	4.2 ± 0.3	0.1 min.	6.1	13.7	4.8
NPIM105A	10.7 ± 0.5	10.0 ± 0.4	5.4 max.	2.0 ref.	4.2 ± 0.3	0.1 min.	6.1	13.7	4.8
NPIM104A...L	10.9 ± 0.6	10.0 ± 0.4	5.0 max.	1.8 ref.	7.3 ± 0.3	0.5 min.	6.5	13.9	7.9

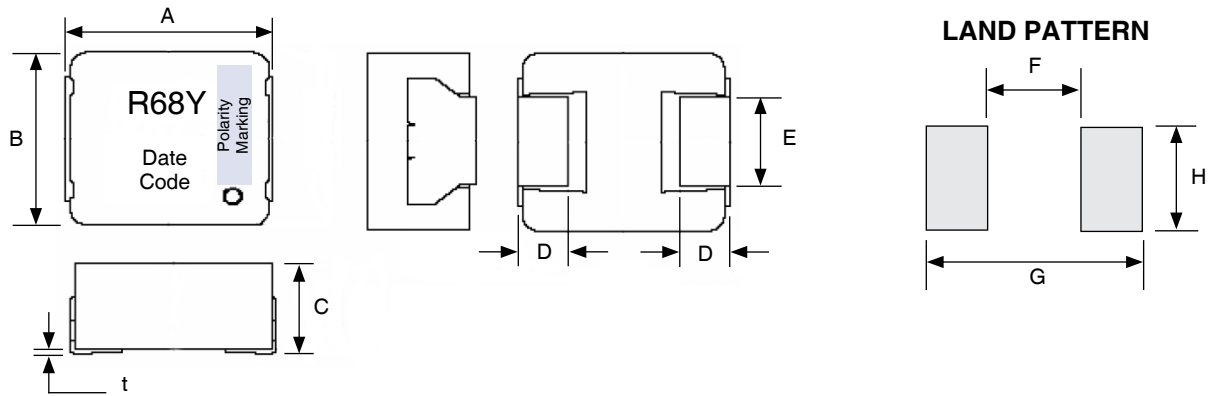

Part Number	STANDARD VALUES - CASE SIZE 63A (6.5 x 6.0 x 3.0mm)					Test Frequency
	Inductance Value (μH)	DC Resistance (mΩ) max.	DC Current Irms (Amps) <sup>1</sup>		DC Current Isat (Amps) <sup>2</sup>	
			Condition A	Condition B		
NPIM63AR68MTRQYF	0.68	6.9	9.8	12.0	24.0	100KHz, 1Vrms
NPIM63A1R0MTRQYF	1.0	8.7	8.8	10.7	20.0	

Note 1 - DC Current (Irms) is current which causes a maximum temperature rise of 40°C:

Condition A = 4-layer PWB (1.6t, FR4)


Condition B = PWB with high dissipation performance, heat radiation constant is approximately 44K/W measured for 6.5mm x 6.0mm x 3.0mm case size.

Note 2 - DC Current (Isat) is current which causes a decrease in inductance of 30%.

Note 3 - Highest operating temperature should be within +150°C including temperature rise due to self-heating.


**Inductance vs. DC Current**

NPIM63AR68MTRQYF

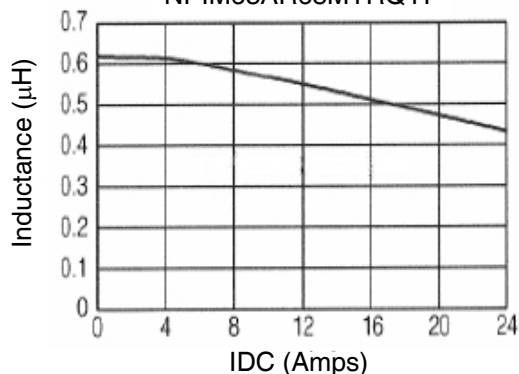


**Inductance vs. DC Current**

NPIM63A1R0MTRQYF

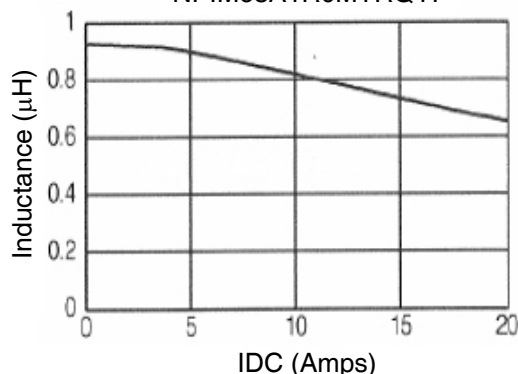


**Temperature vs. DC Current**

NPIM63AR68MTRQYF

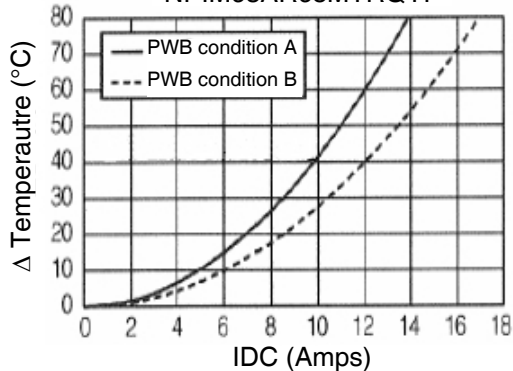

**Temperature vs. DC Current**

NPIM63A1R0MTRQYF

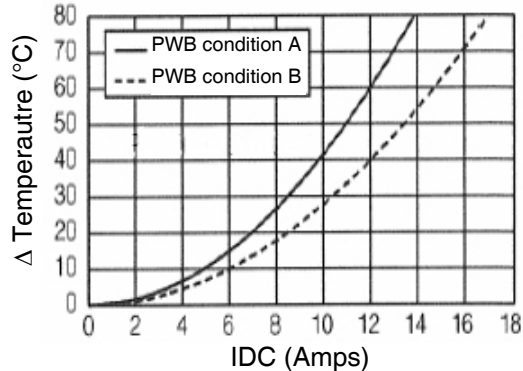

Part Number	STANDARD VALUES - CASE SIZE 64A (6.5 x 6.0 x 4.5mm)					Test Frequency
	Inductance Value (μH)	DC Resistance (mΩ) max.	DC Current Irms (Amps) <sup>1</sup>		DC Current Isat (Amps) <sup>2</sup>	
			Condition A	Condition B		
NPIM64A100MTRQYF	10	59.6	3.6	4.5	8.3	100KHz, 1Vrms



Note 1 - DC Current (Irms) is current which causes a maximum temperature rise of 40°C:

Condition A = 4-layer PWB (1.6t, FR4)

Condition B = PWB with high dissipation performance, heat radiation constant is approximately 37K/W measured for 6.5mm x 6.0mm x 4.5mm case size.

Note 2 - DC Current (Isat) is current which causes a decrease in inductance of 30%.

Note 3 - Highest operating temperature should be within +150°C including temperature rise due to self-heating.

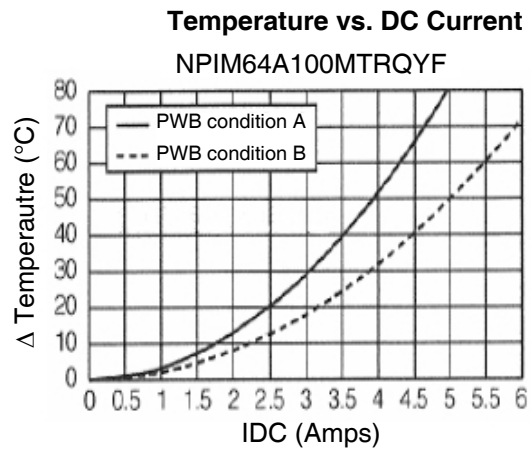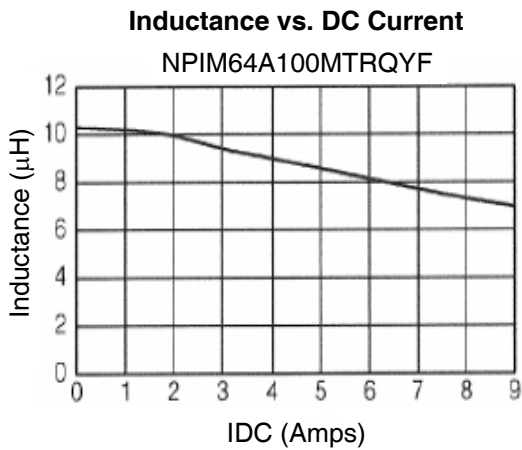

Part Number	STANDARD VALUES - CASE SIZE 75A (7.5 x 7.0 x 5.4mm)					Test Frequency
	Inductance Value (μH)	DC Resistance (mΩ) max.	DC Current I <sub>rms</sub> (Amps) <sup>1</sup>		DC Current I <sub>sat</sub> (Amps) <sup>2</sup>	
			Condition A	Condition B		
NPIM75A4R7MTRQYF	4.7	23	6.3	8.0	13.1	100KHz, 1Vrms
NPIM75A220MTRQYF	22	102	3.0	3.7	5.8	
NPIM75A330MTRQYF	33	132	2.6	3.3	4.8	
NPIM75A470MTRQYF	48	172	2.3	2.9	4.1	

Note 1 - DC Current (I<sub>rms</sub>) is current which causes a maximum temperature rise of 40°C:

Condition A = 4-layer PWB (1.6t, FR4)


Condition B = PWB with high dissipation performance, heat radiation constant is approximately 31K/W measured for 7.5mm x 7.0mm x 5.4mm case size.

Note 2 - DC Current (I<sub>sat</sub>) is current which causes a decrease in inductance of 30%.

Note 3 - Highest operating temperature should be within +150°C including temperature rise due to self-heating.


**Inductance vs. DC Current**

NPIM75A4R7MTRQYF

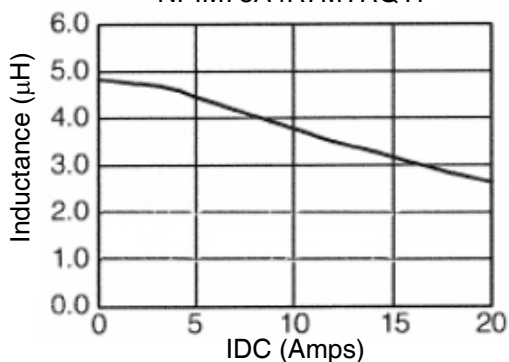


**Inductance vs. DC Current**

NPIM75A220MTRQYF

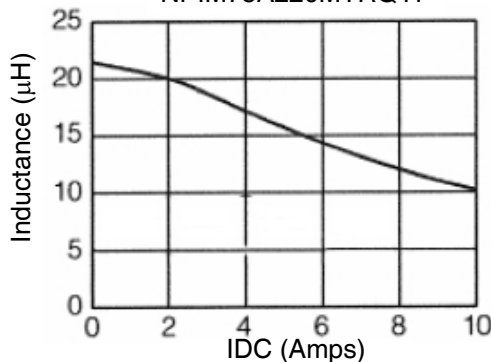


**Inductance vs. DC Current**

NPIM75A330MTRQYF

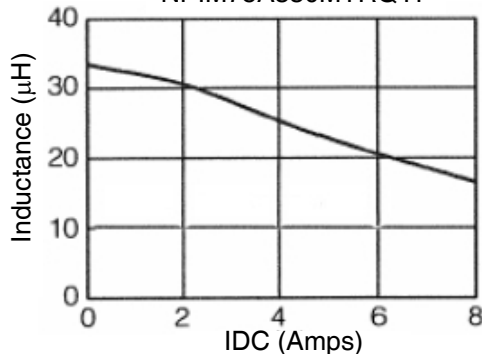


**Inductance vs. DC Current**


NPIM75A470MTRQYF

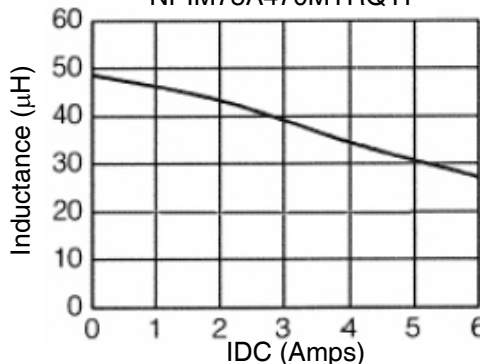


**Temperature vs. DC Current**

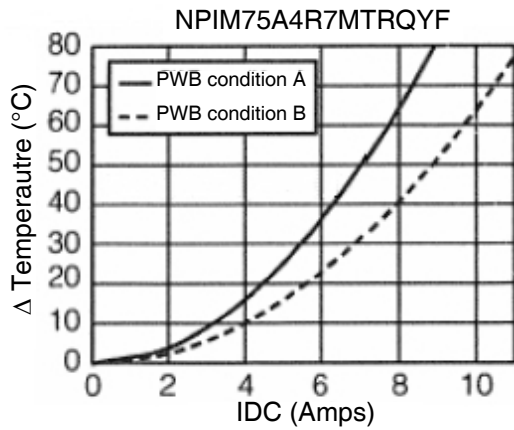


**Temperature vs. DC Current**

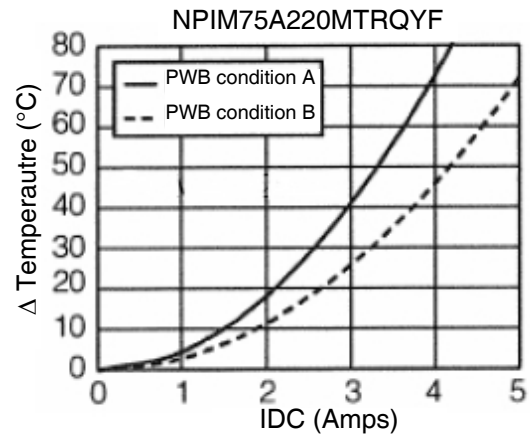

**Temperature vs. DC Current**

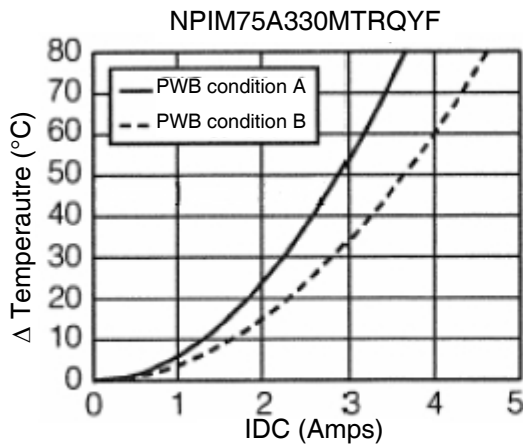

**Temperature vs. DC Current**

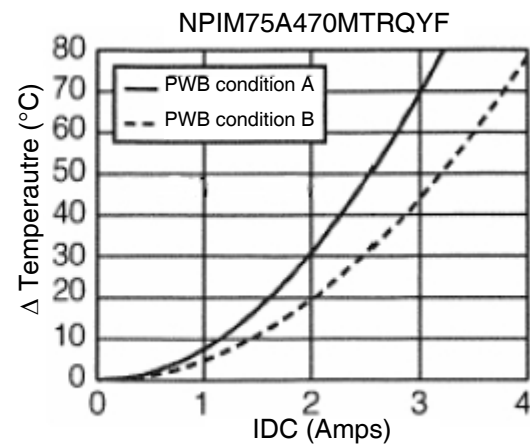

Part Number	STANDARD VALUES - CASE SIZE 84A ( 8.5 x 8.0 x 5.0mm)					Test Frequency
	Inductance Value (μH)	DC Resistance (mΩ) max.	DC Current Irms (Amps) <sup>1</sup>		DC Current Isat (Amps) <sup>2</sup>	
			Condition A	Condition B		
NPIM84A101MTRQYF	100	333	1.7	2.1	3.0	100KHz, 1Vrms

Note 1 - DC Current (Irms) is current which causes a maximum temperature rise of 40°C:


Condition A = 4-layer PWB (1.6t, FR4)

Condition B = PWB with high dissipation performance, heat radiation constant is approximately 29K/W measured for 8.5mm x 8.0mm x 5.0mm case size.

Note 2 - DC Current (Isat) is current which causes a decrease in inductance of 30%.

Note 3 - Highest operating temperature should be within +150°C including temperature rise due to self-heating.

**Inductance vs. DC Current**

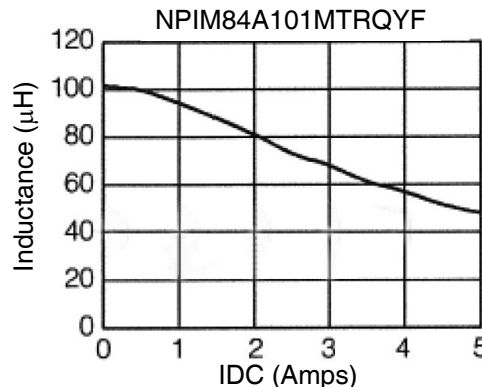

Part Number	STANDARD VALUES - CASE SIZE 85A ( 8.5 x 8.0 x 5.4mm)					Test Frequency
	Inductance Value (μH)	DC Resistance (mΩ) max.	DC Current I <sub>rms</sub> (Amps) <sup>1</sup>		DC Current I <sub>sat</sub> (Amps) <sup>2</sup>	
			Condition A	Condition B		
NPIM85A2R5MTRQYF	2.5	8.4	11.9	14.0	20.1	100KHz, 1Vrms
NPIM85A100MTRQYF	10	37	5.7	6.7	13.0	
NPIM85A220MTRQYF	22	70	4.1	4.8	6.9	
NPIM85A470MTRQYF	48	138	2.9	3.4	5.4	





Note 1 - DC Current (I<sub>rms</sub>) is current which causes a maximum temperature rise of 40°C:

Condition A = 4-layer PWB (1.6t, FR4)

Condition B = PWB with high dissipation performance, heat radiation constant is approximately 27K/W measured for 8.5mm x 8.0mm x 5.4mm case size.

Note 2 - DC Current (I<sub>sat</sub>) is current which causes a decrease in inductance of 30%.

Note 3 - Highest operating temperature should be within +150°C including temperature rise due to self-heating.

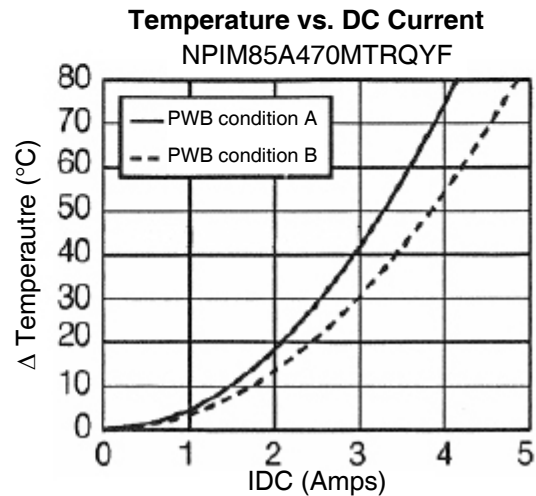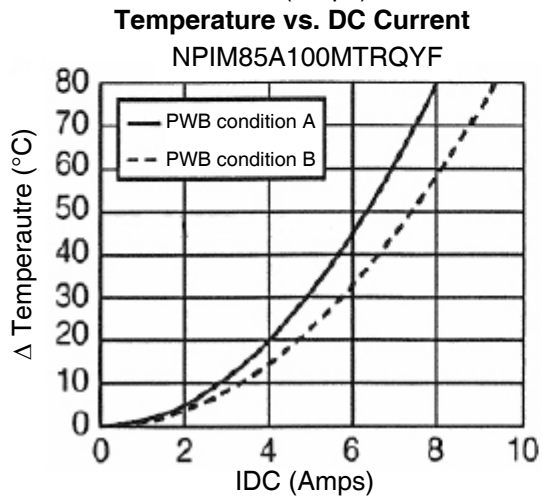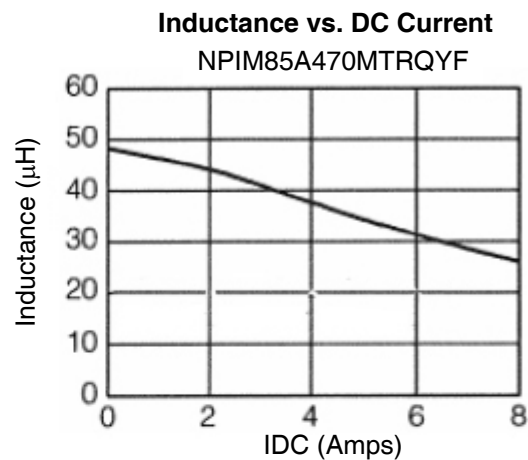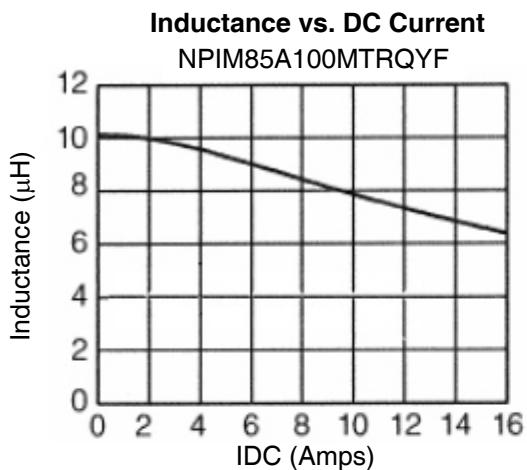

Part Number	STANDARD VALUES - CASE SIZE 104A ( 10.7 x 10.0 x 5.0mm)					
	Inductance Value (μH)	DC Resistance (mΩ) max.	DC Current Irms (Amps) <sup>1</sup>		DC Current Isat (Amps) <sup>2</sup>	Test Frequency
			Condition A	Condition B		
NPIM104A101MTRQYF	97.0	229	2.2	2.7	3.0	100KHz, 1Vrms


Note 1 - DC Current (Irms) is current which causes a maximum temperature rise of 40°C:

Condition A = 4-layer PWB (1.6t, FR4)

Condition B = PWB with high dissipation performance, heat radiation constant is approximately 26K/W measured for 10.7mm x 10.0mm x 5.0mm case size.

Note 2 - DC Current (Isat) is current which causes a decrease in inductance of 30%.

Note 3 - Highest operating temperature should be within +150°C including temperature rise due to self-heating.

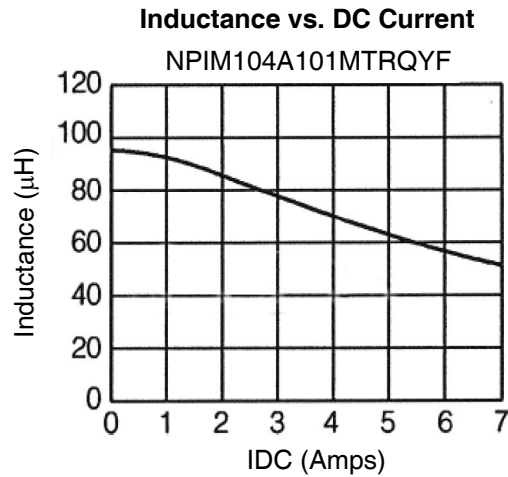



Part Number	STANDARD VALUES - CASE SIZE 105A ( 10.7 x 10.0 x 5.4mm)					Test Frequency
	Inductance Value (μH)	DC Resistance (mΩ) max.	DC Current I <sub>rms</sub> (Amps) <sup>1</sup>		DC Current I <sub>sat</sub> (Amps) <sup>2</sup>	
			Condition A	Condition B		
NPIM105A1R5MTRQYF	1.5	4.2	17.9	21.4	35.1	100KHz, 1V <sub>rms</sub>
NPIM105A2R5MTRQYF	2.5	5.9	15.1	18.1	27.2	
NPIM105A3R3MTRQYF	3.3	7.9	13.1	15.7	22.7	
NPIM105A4R7MTRQYF	4.7	11.3	10.9	13.1	20.0	
NPIM105A100MTRQYF	10	26.2	7.1	8.5	10.7	
NPIM105A220MTRQYF	22	50	5.2	6.2	8.8	
NPIM105A330MTRQYF	32.5	75.4	4.2	5.0	7.6	

Note 1 - DC Current (I<sub>rms</sub>) is current which causes a maximum temperature rise of 40°C:


Condition A = 4-layer PWB (1.6t, FR4)

Condition B = PWB with high dissipation performance, heat radiation constant is approximately 23K/W measured for 10.7mm x 10.0mm x 5.4mm case size.


Note 2 - DC Current (I<sub>sat</sub>) is current which causes a decrease in inductance of 30%.

Note 3 - Highest operating temperature should be within +150°C including temperature rise due to self-heating.


**Inductance vs. DC Current**  
NPIM105A2R5MTRQYF

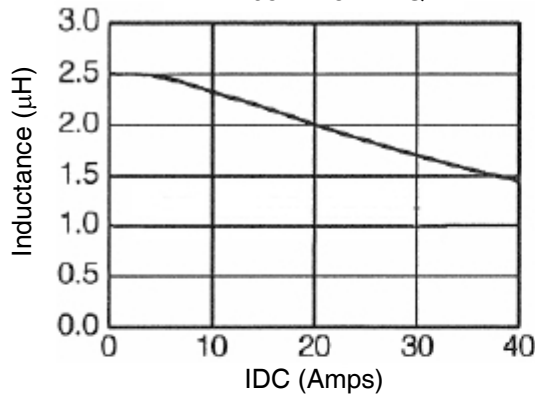


**Inductance vs. DC Current**  
NPIM105A4R7MTRQYF

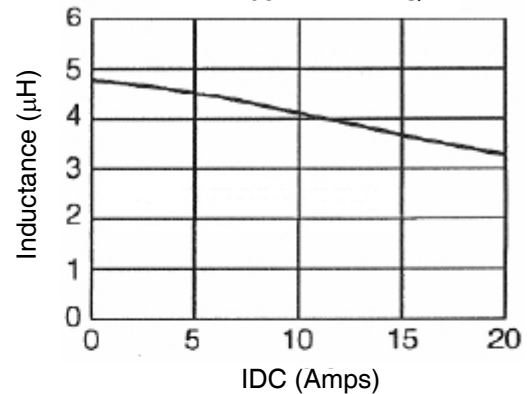

**Temperature vs. DC Current**  
NPIM105A2R5MTRQYF

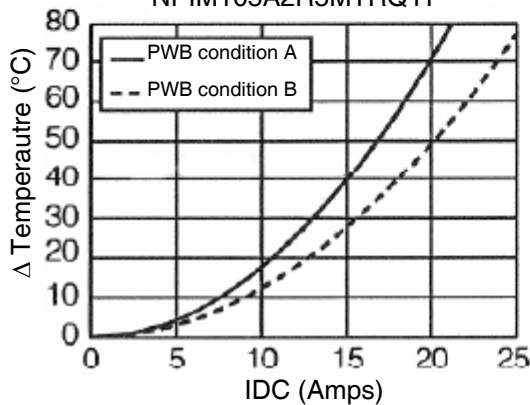

**Temperature vs. DC Current**  
NPIM105A4R7MTRQYF

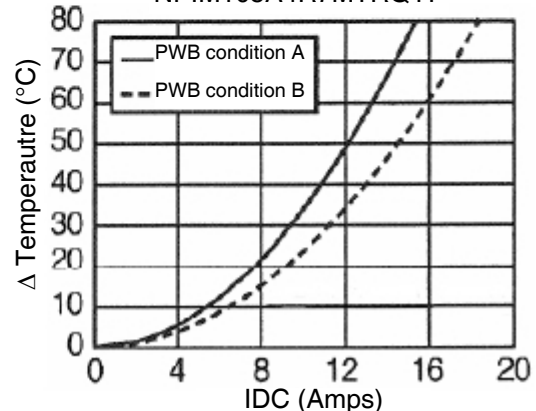

Part Number	STANDARD VALUES - CASE SIZE 104A...L (10.9 x 10.0 x 5.0mm)					
	Inductance Value (μH)	DC Resistance (mΩ)	DC Current Irms (Amps) <sup>1</sup>		DC Current Isat (Amps) <sup>2</sup>	Test Frequency
			Condition A	Condition B		
NPIM104AR68MTRLQYF	0.68	1.93 max.	26.3	31.5	42.0	100KHz, 1Vrms
NPIM104A1R0MTRLQYF	1.0	2.3 typ.	23.0	-	34.0	

Note 1 - DC Current (Irms) is current which causes a maximum temperature rise of 40°C:

Condition A = 4-layer PWB (1.6t, FR4)


Condition B = PWB with high dissipation performance, heat radiation constant is approximately 23K/W measured for 10.9mm x 10.0mm x 5.0mm case size.

Note 2 - DC Current (Isat) is current which causes a decrease in inductance of 30%.

Note 3 - Highest operating temperature should be within +150°C including temperature rise due to self-heating.


### Inductance vs. DC Current

NPIM104AR68MTRLQYF

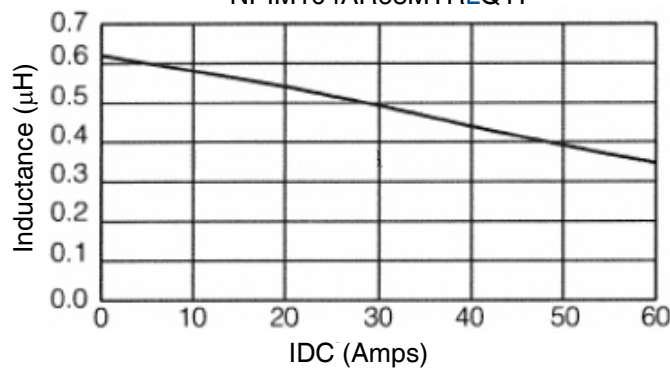

### Temperature vs. DC Current


NPIM104AR68TRLQYF

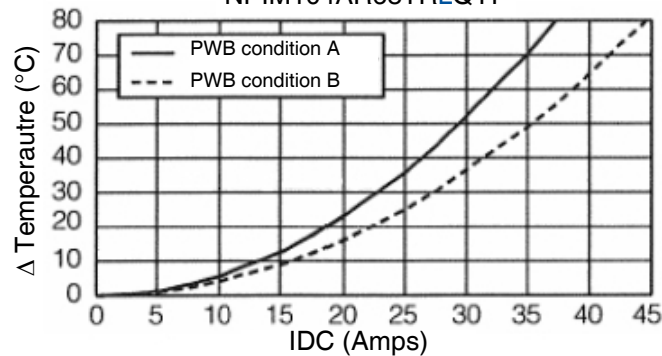


## CARRIER TAPE DIMENSIONS (mm)

Series	Part Thickness	Ao	Bo	Co	Po	Ko	t	W
NPIM63A	3.0	7.1	6.6	7.5	12.0	3.3	0.4	16.0
NPIM64A	4.5	7.1	6.6			5.0		
NPIM75A	5.4	8.1	7.6			6.0		
NPIM84A	5.0	9.1	8.6					
NPIM85A	5.4	9.1	8.6	11.5	16.0	6.3	0.5	24.0
NPIM104A	5.0	10.7	11.9					
NPIM105A	5.4	10.7	11.9					
NPIM104A...L	5.0	10.7	11.9					

### COMPONENT ORIENTATION (NPIM63A, 64A, 75A, 84A and 85A)

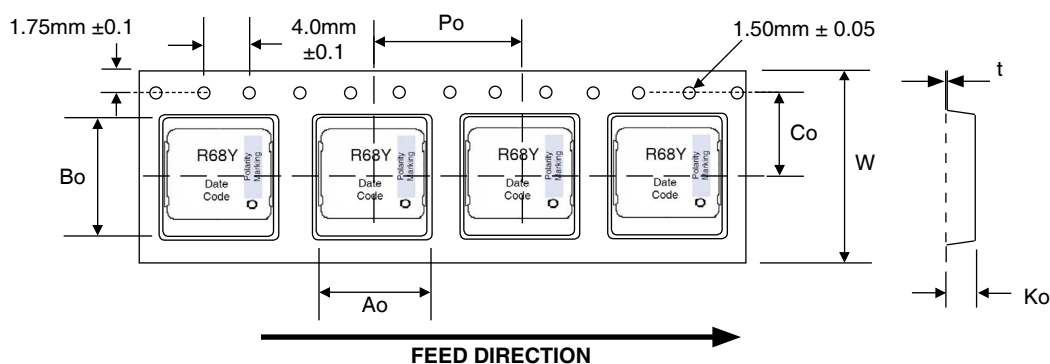

### COMPONENT ORIENTATION (NPIM104A, 105A and 104AL)

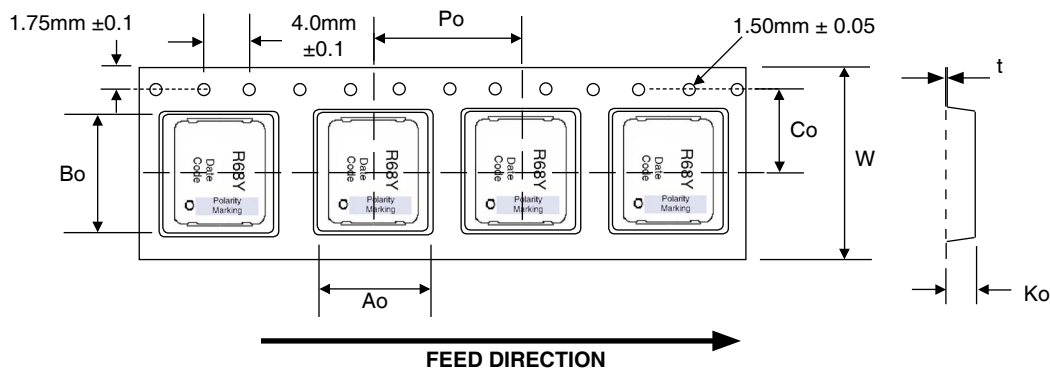

### REEL QUANTITY

Series	Qty/Reel
NPIM63A	1,000
NPIM64A	500
NPIM75A	500
NPIM84A	500
NPIM85A	500
NPIM104A	500
NPIM105A	500
NPIM104A...L	500

