

FEATURES

- EXCELLENT ANTI-SURGE CHARACTERISTICS
- BOTH FLOW SOLDER AND REFLOW SOLDERING ARE APPLICABLE

RoHS Compliant
includes all homogeneous materials



*See Part Number System for Details

SPECIFICATIONS


| Type | EIA Size | Power Rating at 70°C | Max. *1 Working Voltage | Max. *2 Overload Voltage | Resistance Tolerance Code | Temperature Coefficient (ppm/°C) | Resistance Range (Ω) | Resistance Value | Operating Temperature Range |
|---------|----------|----------------------|-------------------------|--------------------------|---------------------------|----------------------------------|----------------------|------------------|-----------------------------|
| NRCP06 | 0603 | 1/10W | 50 | 100 | 10% (K), 20% (M) | ±200ppm | 10 ~ 1Meg | E-24 | -55°C ~ +155°C |
| NRCP10 | 0805 | 1/8W | 150 | 300 | 5% (J), 10% (K), 20% (M) | | 10 ~ 1Meg | | |
| NRCP12 | 1206 | 1/4W | 200 | 400 | | | 10 ~ 1Meg | | |
| NRCP25 | 1210 | 1/3W | | | | | 1.1k ~ 1Meg | | |
| | | 1/2W | | | | | 10 ~ 1K | | |
| NRCP35 | 1812 | 1/2W | | | | | 10 ~ 1Meg | | |
| NRCP50 | 2010 | 3/4W | | | | | 10 ~ 1Meg | | |
| NRCP100 | 2512 | 1W | | | | | 10 ~ 1Meg | | |

Note *1 - Maximum allowable continuous Working Voltage for all resistors is the lower of the two values: "Maximum Working Voltage" as specified above (or)


$$\sqrt{\text{Power rating (Watts)} \times \text{Resistance (Ohms)}}$$

Note *2 - Maximum allowable Overload voltage is 2 times the Maximum Working Voltage (see Note *1 above) or Maximum Overload Voltage as specified in the table whichever is lower

Power Derating Curve: For operation above 70°C, power rating must be derated according to the following chart:


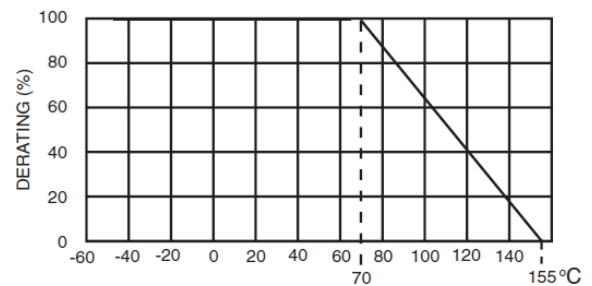


PART NUMBER SYSTEM (E-24 VALUES)

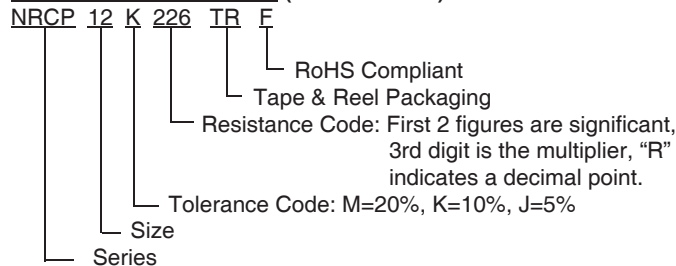

COMPONENT DIMENSIONS (mm)


| Type | EIA Size | L | W | H | P |
|---------|----------|-------------|-------------|-------------|-------------|
| NRCP06 | 0603 | 1.60 ± 0.15 | 0.80 ± 0.15 | 0.45 ± 0.10 | 0.30 ± 0.20 |
| NRCP10 | 0805 | 2.00 ± 0.10 | 1.25 ± 0.10 | 0.50 ± 0.10 | 0.40 ± 0.20 |
| NRCP12 | 1206 | 3.20 ± 0.15 | 1.60 ± 0.15 | 0.60 ± 0.10 | 0.50 ± 0.20 |
| NRCP25 | 1210 | 3.20 ± 0.15 | 2.50 ± 0.15 | 0.60 ± 0.10 | 0.50 ± 0.20 |
| NRCP35 | 1812 | 4.50 ± 0.15 | 3.20 ± 0.15 | 0.60 ± 0.10 | 0.50 ± 0.20 |
| NRCP50 | 2010 | 5.00 ± 0.15 | 2.50 ± 0.15 | 0.60 ± 0.10 | 0.50 ± 0.30 |
| NRCP100 | 2512 | 6.30 ± 0.15 | 3.20 ± 0.15 | 0.60 ± 0.10 | 0.70 ± 0.20 |

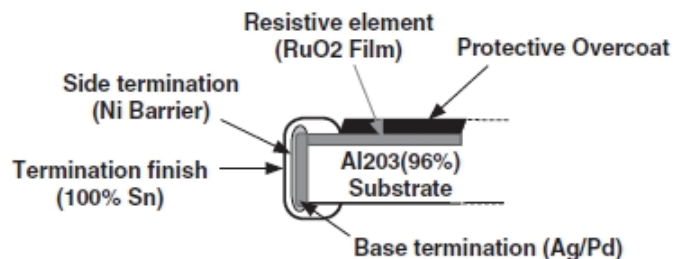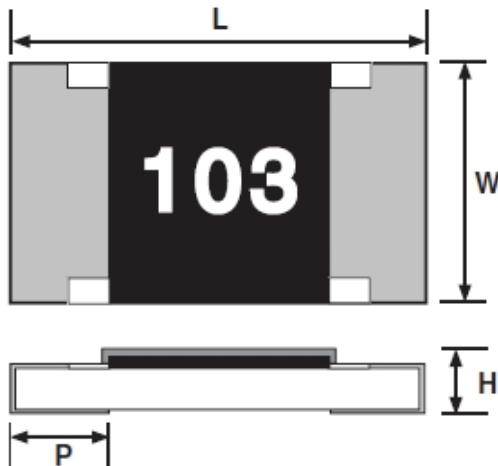


PERFORMANCE CHARACTERISTICS

| Test Items | Requirement $\Delta R \pm ([] +0.1\Omega)$ | Test Method (JISC5201-1) |
|--|--|--|
| Voltage proof | No breakdown or flashover | Maximum Overload Voltage, 60 seconds |
| Variation of resistance with temperature | See Specifications Table | +20°C/-55°C/+20°C/+125°C/+20°C or +20°C/-55°C/+20°C/+155°C/+20°C |
| Shorttime Overload | [2%] | Rated Voltage x 2.5 or Max. Overload Voltage x 2 Whichever is the greater, 2 seconds |
| Resistance to Soldering Heat | [1%] | Immersion into solder bath at 260°C for 5 seconds |
| Temperature Cycling | [1%] | 100 times at -55°C 30 minutes/+125°C 30 minutes |
| Humidity Test (Steady State) | [1%] | +60°C, 90% ~ 95% RH, 1,000 hours |
| Load Life | [3%] | Rated Voltage, 1.5 hrs ON/0.5 hrs OFF Cycle, +70°C, 1,000 hrs |
| Humidity Load Life | [3%] | +60°C, 90% ~ 95% RH, 1,000 hours Rated Voltage, 1.5 hrs ON/0.5 hrs OFF cycle, 1,000 hrs |

ONE-PULSE LIMITING POWER

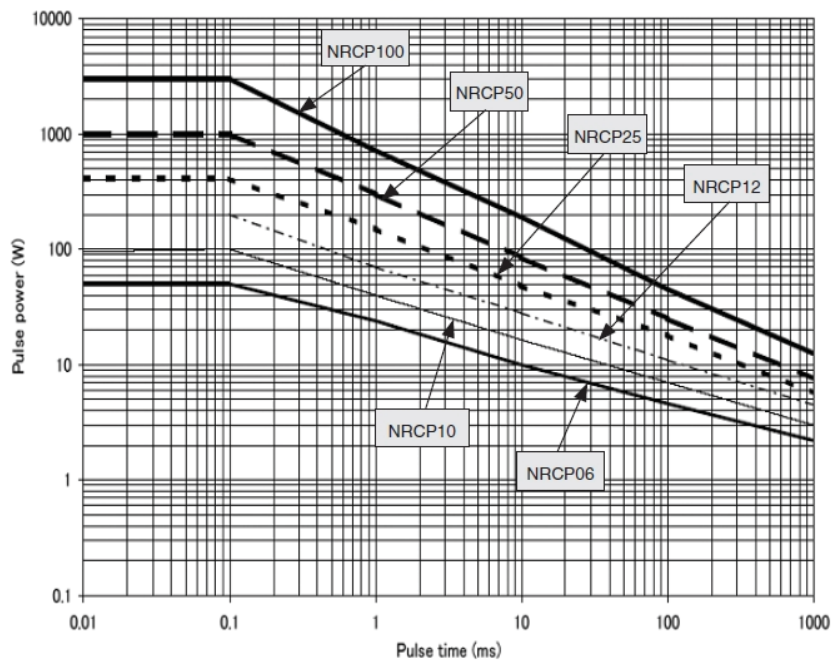

REFLOW SOLDERING TEMPERATURE PROFILE

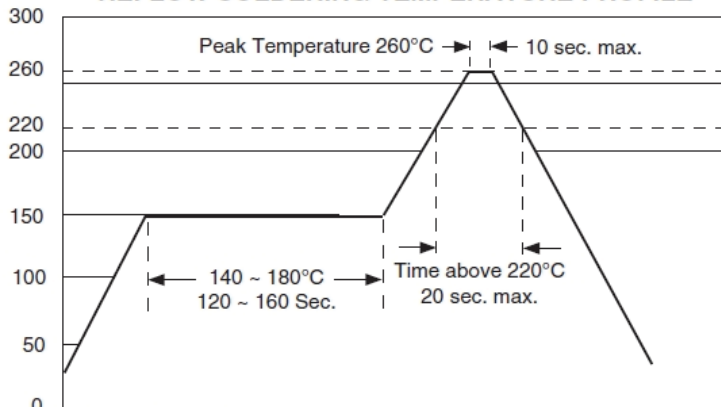

Note: Maximum of 3 times

LAND PATTERN DIMENSIONS (mm)

| Type | EIA Size | a | b | c |
|---------|----------|------|------|------|
| NRCP06 | 0603 | 0.9 | 2.6 | 0.78 |
| NRCP10 | 0805 | 1.35 | 3.45 | 1.1 |
| NRCP12 | 1206 | 2.2 | 4.7 | 1.4 |
| NRCP25 | 1210 | 2.2 | 5.2 | 2.15 |
| NRCP35 | 1812 | 3.5 | 6.1 | 2.75 |
| NRCP50 | 2010 | 3.7 | 6.2 | 2.15 |
| NRCP100 | 2512 | 4.7 | 7.6 | 2.75 |

