



Lithium Coin Cell - CR 2450 HT

- Designed for High Temperature Environment
- Especially for automotive devices such as TPMS or ETC
- Low self-discharge
- Long shelf life
- UN 38.3 tested
- Wide assortment of mounting options and wire terminals available



RoHS compliant



Pb free




REACH compliant



Conflict mineral free

SPECIFICATIONS	
Jauch part number	251846
Nominal Voltage	3V
Nominal Capacity	550 mAh
Continuous Standard Load	7.5 kΩ
Standard Current	0.4 mA
Max. Pulse Current	25 mA
Operating Temperature	-40°C to +125°C
Weight	Approx. 6.9 g
Chemistry	Li/MnO ₂

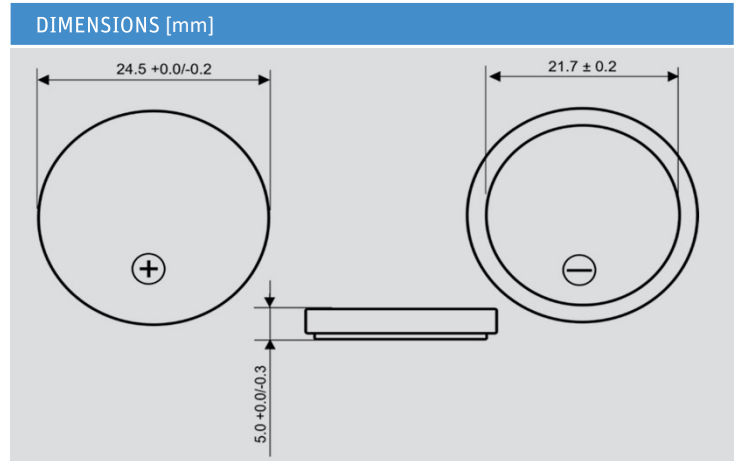

Note: Capacity 550mAh is obtained at standard cc load to 2.0V at 23°C.

