

HIGH TEMPERATURE, EXTENDED LOAD LIFE, RADIAL LEADS, POLARIZED FEATURES

- HIGH RIPPLE CURRENT AT HIGH TEMPERATURE (105°C)
- IDEAL FOR HIGH VOLTAGE LIGHTING BALLAST
- REDUCED SIZE (FROM NRBX)

RoHS
Compliant
includes all homogeneous materials

*See Part Number System for Details



CHARACTERISTICS


Rated Voltage Range		160 ~ 450VDC					
Capacitance Range		1.0 ~ 220μF					
Operating Temperature Range		-25°C ~ +105°C					
Capacitance Tolerance		±20% (M)					
Maximum Leakage Current @ +20°C		CV ≤ 1,000μF			CV > 1,000μF		
		0.1CV + 40μA (1 minute) 0.03CV + 15μA (5 minutes)			0.04CV + 100μA (1 minute) 0.02CV + 25μA (5 minutes)		
Max. Tan δ at 120Hz/20°C	W.V. (Vdc)	160	200	250	350	400	450
	S.V. (Vdc)	200	250	300	400	450	500
	Tan δ	0.15	0.15	0.15	0.20	0.20	0.20
Low Temperature Stability Impedance Ratio @ 120Hz	Z-25°C/Z+20°C	3	3	3	6	6	6
Load Life at W.V. & 105°C 8x11.5mm, 10x12.5mm: 5,000 Hours 10x16mm, 10x20mm: 8,000 Hours φD ≥ 12.5mm: 10,000 Hours	Δ Capacitance	Within ±20% of initial measured value					
	Δ Tan δ	Less than 200% of specified value					
	Δ LC	Less than specified value					

STANDARD PRODUCT AND CASE SIZE TABLE D φ x L (mm)

Cap. (μF)	Code	Working Voltage (Vdc)					
		160	200	250	350	400	450
1.0	1R0	-	-	-	-	8X11.5 10X12.5	-
1.5	1R5	-	-	-	-	8X11.5 10X12.5	-
1.8	1R8	-	-	-	-	8X11.5 10X12.5	-
2.2	2R2	-	-	-	-	8X11.5 10X12.5	-
3.3	3R3	-	-	-	-	10X12.5 10X16	-
4.7	4R7	-	-	8X11.5	10X12.5	10X16	10X20
5.6	5R6	-	-	-	10X12.5	10X16	10X20
6.8	6R8	-	-	10X12.5	10X16	10X16	10X20
10	100	10X16	10X16	10X16	10X20	10X20	12.5X20
15	150	-	-	-	-	12.5X20	12.5X25
22	220	10X20	10X20	10X20	12.5X20	12.5X25 16X20	16X20
33	330	10X20	10X20	12.5X20	16X20	16X20	16X25
47	470	10X20	12.5X20	12.5X20	16X20	16X25 18X20	18X25
68	680	12.5x20	12.5x25 16x20	16x20	18x25	18x25	-
82	820	-	16x20	16x20	18x25	-	-
100	101	12.5x25 16x20	16x20	16x25	-	-	-
150	151	16x25	16x25	18x25	-	-	-
220	221	18x25	-	-	-	-	-

LEAD SPACING AND DIAMETER (mm)

Case Dia. (Dφ)	8	10	12.5	16	18
Lead Dia. (Dφ)	0.6	0.6	0.6	0.8	0.8
Lead Spacing (F)	3.5	5.0	5.0	7.5	7.5
Dim. α	0.5	0.5	0.5	0.5	0.5
Dim. β	2.0	2.0	2.0	2.0	2.0

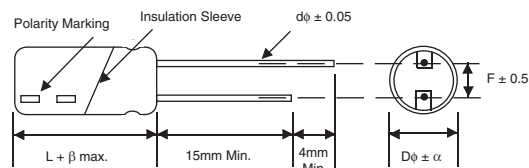

PRECAUTIONS

Please review the notes on correct use, safety and precautions found on pages T10 & T11 of NIC's Electrolytic Capacitor catalog.
Also found at www.niccomp.com/precautions
If in doubt or uncertainty, please review your specific application - process details with NIC's technical support personnel: tpmg@niccomp.com

STANDARD VALUES, SPECIFICATIONS AND CASE SIZES (mm)

Part Number	Cap. (μF)	W.V. (Vdc)	Dissipation Factor +20°C/120Hz	Ripple Current Rating (mA) +105°C/100KHz	Max. ESR (Ω) +20°C/100KHz	Load Life Hours @ +105°C
NRB-XS100M160V10X16F	10	160	0.15	320	24.9	8,000
NRB-XS220M160V10X20F	22		0.15	500	11.3	8,000
NRB-XS330M160V10X20F	33		0.15	650	7.54	8,000
NRB-XS470M160V10X20F	47		0.15	750	5.29	8,000
NRB-XS680M160V12.5x20F	68		0.15	1180	3.66	10,000
NRB-XS101M160V12.5x25F	100		0.15	1420	2.49	10,000
NRB-XS1010M160V16x20F			0.15			10,000
NRB-XS151M160V16x25F	150		0.15	1890	1.66	10,000
NRB-XS221M160V18x25F	220		0.15	2370	1.13	10,000
NRB-XS100M200V10X16F	10	200	0.15	320	24.9	8,000
NRB-XS220M200V10X20F	22		0.15	500	11.3	8,000
NRB-XS330M200V10X20F	33		0.15	650	7.54	8,000
NRB-XS470M200V12.5X20F	47		0.15	980	5.29	10,000
NRB-XS680M200V12.5x25F	68		0.15	1300	3.66	10,000
NRB-XS680M200V16x20F			0.15			10,000
NRB-XS820M200V16x20F			0.15			1380
NRB-XS101M200V16x20F	100		0.15	1420	2.49	10,000
NRB-XS151M200V16x25F	150		0.15	1890	1.66	10,000
NRB-XS4R7M250V8X11.5F	4.7	250	0.15	160	52.9	5,000
NRB-XS6R8M250V10X12.5F	6.8		0.15	250	36.6	5,000
NRB-XS100M250V10X16F	10		0.15	320	24.9	5,000
NRB-XS220M250V10X20F	22		0.15	500	11.3	8,000
NRB-XS330M250V12.5X20F	33		0.15	800	7.54	10,000
NRB-XS470M250V12.5X20F	47		0.15	980	5.29	10,000
NRB-XS680M250V16x20F	68		0.15	1300	3.66	10,000
NRB-XS820M250V16x20F	82		0.15	1380	3.03	10,000
NRB-XS101M250V16x25F	100		0.15	1530	2.49	10,000
NRB-XS151M250V18x25F	150		0.15	1940	1.66	10,000
NRB-XS4R7M350V10X12.5F	4.7	350	0.20	150	70.6	5,000
NRB-XS5R6M350V10X12.5	5.6		0.20	180	59.2	5,000
NRB-XS6R8M350V10X16F	6.8		0.20	280	48.8	8,000
NRB-XS100M350V10X20F	10		0.20	350	33.2	8,000
NRB-XS220M350V12.5X20F	22		0.20	650	15.1	10,000
NRB-XS330M350V16X20F	33		0.20	900	10.1	10,000
NRB-XS470M350V16X20F	47		0.20	1080	7.06	10,000
NRB-XS680M350V18x25F	68		0.20	1470	4.88	10,000
NRB-XS820M350V18x25F	82		0.20	1530	4.05	10,000
NRB-XS1R0M400V8X11.5F	1.0		400	0.20	60	332
NRB-XS1R0M400V10X12.5F		0.20		70	5,000	
NRB-XS1R5M400V8X11.5F	1.5	0.20		90	221	5,000
NRB-XS1R5M400V10X12.5F		0.20		100		5,000
NRB-XS1R8M400V8X11.5F	1.8	0.20		95	184	5,000
NRB-XS1R8M400V10X12.5F		0.20		120		5,000
NRB-XS2R2M400V8X11.5F	2.2	0.20		95	151	5,000
NRB-XS2R2M400V10X12.5F		0.20		140		5,000
NRB-XS3R3M400V10X12.5F	3.3	0.20		150	101	5,000
NRB-XS3R3M400V10X16F		0.20		180		8,000
NRB-XS4R7M400V10X16F	4.7	0.20		220	70.6	8,000
NRB-XS5R6M400V10X16F	5.6	0.20		250	59.2	8,000
NRB-XS6R8M400V10X16F	6.8	0.20		280	48.8	8,000
NRB-XS100M400V10X20F	10	0.20		350	33.2	8,000
NRB-XS150M400V12.5X20F	15	0.20		550	22.1	10,000
NRB-XS220M400V12.5X25F	22	0.20	760	15.1	10,000	
NRB-XS220M400V16X20F		0.20			10,000	
NRB-XS330M400V16X20F	33	0.20	900	10.1	10,000	
NRB-XS470M400V16X25F	47	0.20	1180	7.06	10,000	
NRB-XS470M400V18X20F		0.20			10,000	
NRB-XS680M400V18x25F	68	0.20	1470	4.88	10,000	

STANDARD VALUES, SPECIFICATIONS AND CASE SIZES (mm)

Part Number	Cap. (μF)	W.V. (Vdc)	Dissipation Factor +20°C/120Hz	Ripple Current Rating (mA) +105°C/100KHz	Max. ESR (Ω) +20°C/100KHz	Load Life Hours @ +105°C
NRB-XS4R7M450V10X20F	4.7	450	0.20	220	70.6	8,000
NRB-XS5R6M450V10X20F	5.6		0.20	250	59.2	8,000
NRB-XS6R8M450V10X20F	6.8		0.20	280	48.8	8,000
NRB-XS100M450V12.5X20F	10		0.20	450	33.2	10,000
NRB-XS150M450V12.5X25F	15		0.20	600	22.1	10,000
NRB-XS220M450V16X20F	22		0.20	730	15.1	10,000
NRB-XS330M450V16X25F	33		0.20	980	10.1	10,000
NRB-XS470M450V18X25F	47		0.20	1200	7.06	10,000

RIPPLE CURRENT FREQUENCY CORRECTION FACTOR

Cap. (μF)	120Hz	1KHz	10KHz	100KHz ~ up
1 ~ 4.7	0.2	0.4	0.8	1.0
6.8 ~ 15	0.3	0.6	0.9	1.0
22 ~ 82	0.4	0.7	0.9	1.0
100 ~ 220	0.45	0.75	0.9	1.0

PART NUMBER SYSTEM

NRB-XS 1R0 M 400V 8X11.5 F

- NRB-XS: Series
- 1R0: Capacitance Code: First 2 characters significant, third character is multiplier
- M: Tolerance Code (M=20%)
- 400V: Working Voltage (Vdc)
- 8X11.5: Case Size (Dφ x L)
- F: RoHS Compliant