


FEATURES

- LONG LIFE AT +85°C (3,000 HOURS)
- HIGH RIPPLE CURRENT
- HIGH DENSITY DESIGN
- SUITABLE FOR SWITCHING POWER SUPPLIES

RoHS
Compliant
includes all homogeneous materials

*See Part Number System for Details



SPECIFICATIONS

Operating Temperature Range			-25 ~ +85°C					
Rated Voltage Range			200 ~ 450Vdc					
Rated Capacitance Range			68 ~ 2,200μF					
Capacitance Tolerance			±20% (M)					
Max. Leakage Current (μA) After 5 minutes (20°C)			0.02CV or 3,000μA					
Max. Tan δ at 120Hz/20°C	W.V. (Vdc)		200	220	250	400	420	450
	Tan δ max.		0.20	0.20	0.20	0.20	0.20	0.20
Surge Voltage	W.V. (Vdc)		200	220	250	400	420	450
	S.V. (Vdc)		250	270	300	450	470	500
Ripple Current Frequency Correction Factors	Frequency (Hz)		50 (60)	+120	+300	+1K	10K≤	-
	Multiplier at 85°C	200 ~ 250Vdc	0.80	1.0	1.15	1.17	1.20	-
		400 ~ 450Vdc	0.77	1.00	1.10	1.12	1.15	-
Ripple Current Temperature Correction Factors	Temperature (°C)		+65	+85	-			
	Multiplier		1.15	1.0				
Low Temperature Stability (Impedance Ratio)	Temperature (°C)		200	220	250	400	420	450
	Z-25°C/+20°C		7					
Load Life Test 3,000 hours at +85°C	Capacitance Change		Within ±20% of initial measured value					
	Tan δ		Less than 200% of specified maximum value					
	Leakage Current		Less than specified maximum value					
Shelf Life Test 1,000 hours at +85°C (no load)	Capacitance Change		Within ±20% of initial measured value					
	Tan δ		Less than 200% of specified maximum value					
	Leakage Current		Less than specified maximum value					
Surge Voltage Test 1,000 Cycles 30 seconds "On" and 5.5 minutes "Off" @ +15°C ~ +35°C	Capacitance Change		Within ±15% of initial measured value					
	Tan δ		Less than specified maximum value					
	Leakage Current		Less than specified maximum value					
Soldering Effect Solder Bath Temp.: +260 ± 5°C Pre-heat: 120 ± 2 sec. to +120 ± 2°C	Capacitance Change		Within ±10% of initial measured value					
	Tan δ		Less than specified maximum value					
	Leakage Current		Less than specified maximum value					

Note: Please note NRLC product series is specifically designed for use in commercial & consumer applications. For mission critical or industrial applications, NIC recommends our NRLF / NRLM / NRLP / NRLR series products. Please consult NIC product specifications available on www.niccomp.com. If in doubt, please contact NIC to review your requirements (apreview@niccomp.com)

MECHANICAL CHARACTERISTICS:

1. Safety Vent:

The capacitors are provided with a pressure sensitive safety vent on the top of can. The vent is designed to rupture in the event that high internal gas pressure is developed by circuit malfunction or mis-use like reverse voltage.

2. Terminal Strength:


Each terminal of the capacitor shall withstand an axial pull force of 4.5Kg for a period 10 seconds or a radial bent force of 2.5Kg for a period of 30 seconds.

PART NUMBER SYSTEM

NRLC 221 M 400V 22X45 S F

Series | Capacitance Code | Tolerance Code | Voltage Rating | Case Size (mm) | Lead Length (S=4mm) | RoHS compliant

Recommended PC Board Mounting Holes:

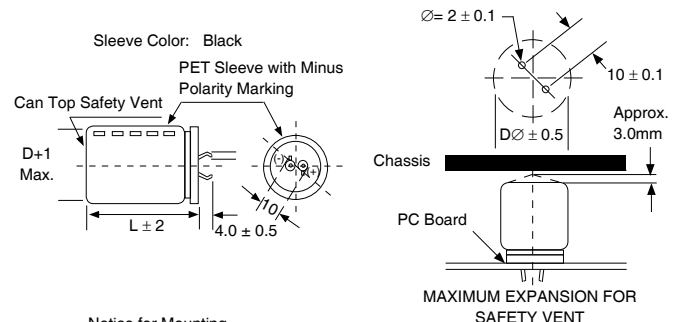

Notice for Mounting

The space from the top of the can shall be more than (3mm) from chassis or other construction materials so that safety vent has room to expand in case of emergency.

PRECAUTIONS

Please review the notes on correct use, safety and precautions found on pages T10 & T11 of NIC's Electrolytic Capacitor catalog.
Also found at www.niccomp.com/precautions
If in doubt or uncertainty, please review your specific application - process details with NIC's technical support personnel: tpmg@niccomp.com



STANDARD PRODUCT LIST, CASE SIZE AND SPECIFICATIONS

Part Number	Cap. (μ F)	Voltage (Vdc)	Case Size (mm)	ESR (Ω @ 20°C)	Max. Ripple Current (mArms @ 85°C)		Load Life @ +85°C (Hours)
				120Hz	120Hz	10K ~ 50KHz	
NRLC271M200V22X25SF	270	200	22X25	1.23	1250	1500	3,000
NRLC331M200V22X25SF	330		22X25	1.01	1320	1584	3,000
NRLC391M200V22X31SF	390		22X31	0.85	1510	1812	3,000
NRLC391M200V25X25SF	390		25X25	0.85	1560	1872	3,000
NRLC471M200V22X31SF	470		22X31	0.71	1730	2076	3,000
NRLC471M200V25X31SF	470		25X31	0.71	1780	2136	3,000
NRLC561M200V22X35SF	560		22X35	0.59	1910	2292	3,000
NRLC561M200V25X31SF	560		25X31	0.59	1960	2352	3,000
NRLC561M200V30X25SF	560		30X25	0.59	1960	2352	3,000
NRLC681M200V22X41SF	680		22X41	0.49	2170	2604	3,000
NRLC681M200V25X35SF	680		25X35	0.49	2260	2712	3,000
NRLC681M200V30X31SF	680		30X31	0.49	2270	2724	3,000
NRLC821M200V22X45SF	820		22X45	0.40	2450	2940	3,000
NRLC821M200V25X41SF	820		25X41	0.40	2540	3048	3,000
NRLC821M200V30X31SF	820		30X31	0.40	2530	3036	3,000
NRLC102M200V22X55SF	1000		22X55	0.33	2880	3456	3,000
NRLC102M200V25X45SF	1000		25X45	0.33	2990	3588	3,000
NRLC102M200V30X35SF	1000		30X35	0.33	2870	3444	3,000
NRLC122M200V25X51SF	1200		25X51	0.28	3290	3948	3,000
NRLC122M200V30X41SF	1200		30X41	0.28	3280	3936	3,000
NRLC122M200V35X35SF	1200		35X35	0.28	3250	3900	3,000
NRLC152M200V30X51SF	1500		30X51	0.22	3760	4512	3,000
NRLC152M200V35X41SF	1500		35X41	0.22	3710	4452	3,000
NRLC182M200V30X55SF	1800		30X55	0.18	4200	5040	3,000
NRLC182M200V35X45SF	1800		35X45	0.18	4190	5028	3,000
NRLC222M200V35X51SF	2200		35X51	0.15	4780	5736	3,000
NRLC331M220V22X31SF	330	220	22X31	1.01	1450	1740	3,000
NRLC391M220V22X35SF	390		22X35	0.85	1640	1968	3,000
NRLC391M220V25X31SF	390		25X31	0.85	1590	1908	3,000
NRLC471M220V22X35SF	470		22X35	0.71	1870	2244	3,000
NRLC471M220V25X35SF	470		25X35	0.71	1900	2280	3,000
NRLC561M220V22X41SF	560		22X41	0.59	2030	2436	3,000
NRLC561M220V25X35SF	560		25X35	0.59	2170	2604	3,000
NRLC561M220V30X31SF	560		30X31	0.59	1990	2388	3,000
NRLC681M220V22X45SF	680		22X45	0.49	2390	2868	3,000
NRLC681M220V25X41SF	680		25X41	0.49	2330	2796	3,000
NRLC681M220V30X35SF	680		30X35	0.49	2290	2748	3,000
NRLC821M220V25X48SF	820		25X48	0.40	2650	3180	3,000
NRLC821M220V30X41SF	820		30X41	0.40	2590	3108	3,000
NRLC821M220V35X31SF	820		35X31	0.40	2540	3048	3,000
NRLC102M220V30X45SF	1000		30X45	0.33	3060	3672	3,000
NRLC102M220V35X35SF	1000		35X35	0.33	3000	3600	3,000
NRLC122M220V30X51SF	1200		30X51	0.28	3390	4068	3,000
NRLC122M220V35X41SF	1200		35X41	0.28	3360	4032	3,000
NRLC152M220V35X45SF	1500		35X45	0.22	3730	4476	3,000
NRLC182M220V35X51SF	1800		35X51	0.18	4120	4944	3,000
NRLC221M250V22X31SF	220	250 (continue next page)	22X31	1.51	1130	1356	3,000
NRLC271M250V22X31SF	270		22X31	1.23	1370	1644	3,000
NRLC331M250V22X35SF	330		22X35	1.01	1520	1824	3,000



STANDARD PRODUCT LIST, CASE SIZE AND SPECIFICATIONS

Part Number	Cap. (μ F)	Voltage (Vdc)	Case Size (mm)	ESR (Ω @ 20°C)	Max. Ripple Current (mA _{rms} @ 85°C)		Load Life @ +85°C (Hours)
				120Hz	120Hz	10K ~ 50KHz	
NRLC331M250V25X31SF	330	250	25X31	1.01	1470	1764	3,000
NRLC391M250V22X41SF	390		22X41	0.85	1720	2064	3,000
NRLC391M250V25X35SF	390		25X35	0.85	1720	2064	3,000
NRLC471M250V22X45SF	470		22X45	0.71	1960	2352	3,000
NRLC471M250V25X41SF	470		25X41	0.71	1960	2352	3,000
NRLC471M250V30X31SF	470		30X31	0.71	1860	2232	3,000
NRLC561M250V22X51SF	560		22X51	0.59	2270	2724	3,000
NRLC561M250V25X45SF	560		25X45	0.59	2140	2568	3,000
NRLC561M250V30X35SF	560		30X35	0.59	2140	2568	3,000
NRLC681M250V25X51SF	680		25X51	0.49	2440	2928	3,000
NRLC681M250V30X41SF	680		30X41	0.49	2470	2964	3,000
NRLC821M250V30X45SF	820		30X45	0.40	2720	3264	3,000
NRLC821M250V35X35SF	820		35X35	0.40	2700	3240	3,000
NRLC102M250V30X51SF	1000		30X51	0.33	3240	3888	3,000
NRLC102M250V35X41SF	1000		35X41	0.33	3180	3816	3,000
NRLC122M250V35X51SF	1200		35X51	0.28	3500	4200	3,000
NRLC820M400V22X25SF	82	400	22X25	4.05	760	874	3,000
NRLC101M400V22X31SF	100		22X31	3.32	900	1035	3,000
NRLC121M400V22X31SF	120		22X31	2.76	1000	1150	3,000
NRLC121M400V25X25SF	120		25X25	2.76	1030	1184	3,000
NRLC151M400V22X35SF	150		22X35	2.21	1130	1299	3,000
NRLC151M400V25X31SF	150		25X31	2.21	1160	1334	3,000
NRLC181M400V22X41SF	180		22X41	1.84	1290	1483	3,000
NRLC181M400V25X35SF	180		25X35	1.84	1320	1518	3,000
NRLC181M400V30X25SF	180		30X25	1.84	1380	1587	3,000
NRLC221M400V22X45SF	220		22X45	1.51	1440	1656	3,000
NRLC221M400V25X41SF	220		25X41	1.51	1500	1725	3,000
NRLC221M400V30X31SF	220		30X31	1.51	1520	1748	3,000
NRLC271M400V25X45SF	270		25X45	1.23	1630	1874	3,000
NRLC271M400V30X35SF	270		30X35	1.23	1660	1909	3,000
NRLC331M400V25X51SF	330		25X51	1.01	1820	2093	3,000
NRLC331M400V30X41SF	330		30X41	1.01	1870	2150	3,000
NRLC331M400V35X31SF	330		35X31	1.01	1870	2150	3,000
NRLC391M400V30X45SF	390		30X45	0.85	2060	2369	3,000
NRLC391M400V35X35SF	390		35X35	0.85	2080	2392	3,000
NRLC471M400V30X51SF	470		30X51	0.71	2280	2622	3,000
NRLC471M400V35X41SF	470		35X41	0.71	2310	2656	3,000
NRLC561M400V35X45SF	560		35X45	0.59	2600	2990	3,000
NRLC681M400V35X51SF	680		35X51	0.49	2830	3254	3,000
NRLC820M420V22X25SF	82	420 (continue next page)	22X25	4.05	780	897	3,000
NRLC101M420V22X31SF	100		22X31	3.32	880	1012	3,000
NRLC101M420V25X25SF	100		25X25	3.32	890	1023	3,000
NRLC121M420V22X31SF	120		22X31	2.76	980	1127	3,000
NRLC121M420V25X31SF	120		25X31	2.76	990	1138	3,000
NRLC151M420V22X35SF	150		22X35	2.21	1100	1265	3,000
NRLC151M420V25X31SF	150		25X31	2.21	1150	1322	3,000
NRLC151M420V30X25SF	150		30X25	2.21	1190	1368	3,000
NRLC181M420V22X41SF	180		22X41	1.84	1210	1391	3,000
NRLC181M420V25X35SF	180		25X35	1.84	1300	1495	3,000



STANDARD PRODUCT LIST, CASE SIZE AND SPECIFICATIONS

Part Number	Cap. (μ F)	Voltage (Vdc)	Case Size (mm)	ESR (Ω @ 20°C)	Max. Ripple Current (mA _{rms} @ 85°C)		Load Life @ +85°C (Hours)
				120Hz	120Hz	10K ~ 50KHz	
NRLC181M420V30X31SF	180	420	30X31	1.84	1350	1552	3,000
NRLC221M420V22X48SF	220		22X48	1.51	1410	1621	3,000
NRLC221M420V25X41SF	220		25X41	1.51	1440	1656	3,000
NRLC221M420V30X35SF	220		30X35	1.51	1510	1736	3,000
NRLC271M420V25X48SF	270		25X48	1.23	1580	1817	3,000
NRLC271M420V30X41SF	270		30X41	1.23	1740	2001	3,000
NRLC271M420V35X31SF	270		35X31	1.23	1770	2035	3,000
NRLC331M420V25X55SF	330		25X55	1.01	2010	2311	3,000
NRLC331M420V30X45SF	330		30X45	1.01	1800	2070	3,000
NRLC331M420V35X35SF	330		35X35	1.01	1980	2277	3,000
NRLC391M420V30X51SF	390		30X51	0.85	2030	2334	3,000
NRLC391M420V35X41SF	390		35X41	0.85	2070	2380	3,000
NRLC471M420V30X55SF	470		30X55	0.71	2280	2622	3,000
NRLC471M420V35X45SF	470		35X45	0.71	2380	2737	3,000
NRLC561M420V35X51SF	560		35X51	0.59	2690	3093	3,000
NRLC680M450V22X25SF	680	450	22X25	4.88	640	736	3,000
NRLC820M450V22X25SF	820		22X25	4.05	790	908	3,000
NRLC101M450V22X31SF	100		22X31	3.32	860	989	3,000
NRLC101M450V25X25SF	100		25X25	3.32	880	1012	3,000
NRLC121M450V22X35SF	120		22X35	2.76	980	1127	3,000
NRLC121M450V25X31SF	120		25X31	2.76	1000	1150	3,000
NRLC121M450V30X25SF	120		30X25	2.76	1020	1173	3,000
NRLC151M450V22X41SF	150		22X41	2.21	1080	1242	3,000
NRLC151M450V25X35SF	150		25X35	2.21	1130	1299	3,000
NRLC151M450V30X25SF	150		30X25	2.21	1180	1357	3,000
NRLC181M450V22X45SF	180		22X45	1.84	1200	1380	3,000
NRLC181M450V25X41SF	180		25X41	1.84	1280	1472	3,000
NRLC181M450V30X31SF	180		30X31	1.84	1320	1518	3,000
NRLC221M450V25X45SF	220		25X45	1.51	1450	1667	3,000
NRLC221M450V30X35SF	220		30X35	1.51	1500	1725	3,000
NRLC221M450V35X31SF	220		35X31	1.51	1460	1679	3,000
NRLC271M450V25X51SF	270		25X51	1.23	1570	1805	3,000
NRLC271M450V30X41SF	270		30X41	1.23	1730	1989	3,000
NRLC271M450V35X31SF	270		35X31	1.23	1730	1989	3,000
NRLC331M450V30X45SF	330		30X45	1.01	1930	2219	3,000
NRLC331M450V35X35SF	330		35X35	1.01	1960	2254	3,000
NRLC391M450V30X51SF	390		30X51	0.85	2170	2495	3,000
NRLC391M450V35X41SF	390		35X41	0.85	2170	2495	3,000
NRLC471M450V35X45SF	470		35X45	0.71	2450	2817	3,000
NRLC561M450V35X51SF	560		35X51	0.59	2630	3024	3,000