

RADIAL LEADS, POLARIZED, NEW FURTHER REDUCED CASE SIZING,
FROM NRWS WIDE TEMPERATURE RANGE

REDUCED SIZE
NRWS → **NRWPC**
(today's standard) (reduced sizes)

**RoHS
Compliant**
includes all homogeneous materials




CHARACTERISTICS

*See Part Number System for Details

Rated Voltage Range		160 ~ 450VDC					
Capacitance Range		0.47 ~ 560 μ F					
Operating Temperature Range		-25°C ~ +105°C					
Capacitance Tolerance		\pm 20% (M)					
Maximum Leakage Current		0.01CV + 10 μ A (after 2 minutes)					
Max. Tan δ at 120Hz/20°C	W.V. (Vdc)	160	200	250	350	400	450
	S.V. (Vdc)	200	250	300	400	450	500
	Tan δ	0.15			0.20		
Low Temperature Stability Impedance Ratio @ 120Hz	W.V. (Vdc)	160	200	250	350	400	450
	Z-25°C/Z+20°C	5	5	5	6	7	7
Load Life Test @ 105°C	Duration	2,000 hours					
	Δ Capacitance	Within \pm 20% of initial measured value					
	Δ Tan δ	Less than 200% of specified value					
	Δ LC	Less than specified value					


PART NUMBERING SYSTEM

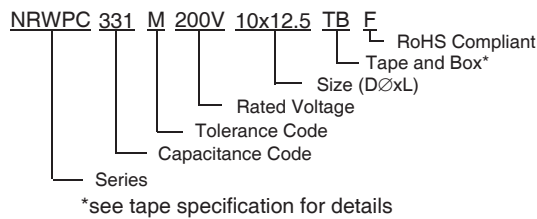

LEAD SPACING AND DIAMETER (mm)

Case Dia. (D ϕ)	5	6.3	8	10	12.5	16	18
Lead Dia. (D ϕ)	0.5	0.5	0.6	0.6	0.6	0.8	0.8
Lead Spacing (F)	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Dim. α	0.5						1.0
Dim. B	1.5			2.0			

DIMENSIONS (mm)

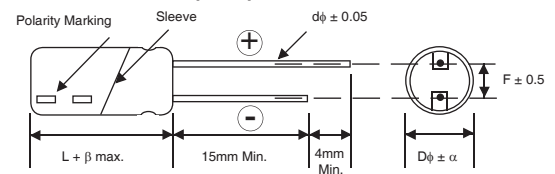

Drawing is representative of parts as supplied in bulk or straight lead format, please see taping specification for details on taped format packaging.

PRECAUTIONS

Please review the notes on correct use, safety and precautions found on pages T10 & T11 of NIC's Electrolytic Capacitor catalog.
Also found at www.niccomp.com/precautions
If in doubt or uncertainty, please review your specific application - process details with NIC's technical support personnel: tpmg@niccomp.com



STANDARD VALUES, SPECIFICATIONS AND CASE SIZES (mm)

Part Number	Cap. (µF)	W.V. (Vdc)	Dissipation Factor +20°C/120Hz	Ripple Current Rating (mA) +105°C/120Hz	Max. ESR (Ω) +20°C/120Hz	Load Life Hours @+105°C
NRWPCR47M160V5X11F	0.47	160	0.15	13	529.37	2,000
NRWPC1R0M160V5X11F	1.0		0.15	18	248.81	2,000
NRWPC2R2M160V6.3X11F	2.2		0.15	27	113.09	2,000
NRWPC3R3M160V6.3X11F	3.3		0.15	28	75.40	2,000
NRWPC4R7M160V6.3X11F	4.7		0.15	32	52.94	2,000
NRWPC6R8M160V8X12F	6.8		0.15	38	36.59	2,000
NRWPC100M160V8X12F	10		0.15	55	24.88	2,000
NRWPC150M160V10X12F	15		0.15	70	16.59	2,000
NRWPC220M160V10X20F	22		0.15	140	11.31	2,000
NRWPC330M160V10X20F	33		0.15	145	7.54	2,000
NRWPC470M160V12.5X20F	47		0.15	195	5.29	2,000
NRWPC560M160V12.5X20F	56		0.15	215	4.44	2,000
NRWPC680M160V12.5X25F	68		0.15	270	3.66	2,000
NRWPC820M160V12.5X25F	82		0.15	290	3.03	2,000
NRWPC101M160V16X25F	100		0.15	340	2.49	2,000
NRWPC121M160V16X25F	120		0.15	360	2.07	2,000
NRWPC151M160V16X32F	150		0.15	435	1.66	2,000
NRWPC181M160V16X36F	180		0.15	450	1.38	2,000
NRWPC221M160V16X36F	220		0.15	500	1.13	2,000
NRWPC331M160V18X36F	330		0.15	600	0.75	2,000
NRWPC471M160V18X45F	470	0.15	740	0.53	2,000	
NRWPC561M160V18X51F	560	0.15	800	0.44	2,000	
NRWPCR47M200V5X11F	0.47	200	0.15	13	529.37	2,000
NRWPC1R0M200V5X11F	1.0		0.15	15	248.81	2,000
NRWPC2R2M200V6.3X11F	2.2		0.15	27	113.09	2,000
NRWPC3R3M200V6.3X11F	3.3		0.15	28	75.40	2,000
NRWPC4R7M200V8X12F	4.7		0.15	36	52.94	2,000
NRWPC6R8M200V8X12F	6.8		0.15	40	36.59	2,000
NRWPC100M200V10X12F	10		0.15	60	24.88	2,000
NRWPC150M200V10X16F	15		0.15	75	16.59	2,000
NRWPC220M200V10X20F	22		0.15	150	11.31	2,000
NRWPC330M200V12.5x20F	33		0.15	160	7.54	2,000
NRWPC470M200V12.5x20F	47		0.15	195	5.29	2,000
NRWPC560M200V12.5x20F	56		0.15	215	4.44	2,000
NRWPC680M200V12.5x25F	68		0.15	250	3.66	2,000
NRWPC820M200V16x25F	82		0.15	270	3.03	2,000
NRWPC101M200V16x25F	100		0.15	320	2.49	2,000
NRWPC121M200V16x32F	120		0.15	340	2.07	2,000
NRWPC151M200V16x32F	150		0.15	360	1.66	2,000
NRWPC181M200V16x36F	180		0.15	400	1.38	2,000
NRWPC221M200V16x36F	220		0.15	500	1.13	2,000
NRWPC331M200V18x36F	330		0.15	610	0.75	2,000
NRWPC471M200V18x45F	470	0.15	750	0.53	2,000	
NRWPC561M200V18x51F	560	0.15	805	0.44	2,000	
NRWPCR47M250V5x11F	0.47	250	0.15	13	529.37	2,000
NRWPC1R0M250V6.3x11F	1.0		0.15	18	248.81	2,000
NRWPC2R2M250V6.3x11F	2.2		0.15	23	113.09	2,000
NRWPC3R3M250V8x12F	3.3		0.15	30	75.40	2,000
NRWPC4R7M250V8x12F	4.7		0.15	39	52.94	2,000
NRWPC6R8M250V10x12F	6.8		0.15	42	36.59	2,000
NRWPC100M250V10x16F	10		0.15	75	24.88	2,000
NRWPC150M250V10x16F	15		0.15	85	16.59	2,000
NRWPC220M250V12.5x20F	22		0.15	160	11.31	2,000
NRWPC330M250V12.5x20F	33		0.15	165	7.54	2,000
NRWPC470M250V12.5x25F	47		0.15	195	5.29	2,000
NRWPC560M250V12.5x25F	56		0.15	215	4.44	2,000
NRWPC680M250V16x25F	68		0.15	240	3.66	2,000
NRWPC820M250V16x25F	82		0.15	280	3.03	2,000
NRWPC101M250V16x32F	100		0.15	310	2.49	2,000
NRWPC121M250V16x32F	120		0.15	330	2.07	2,000
NRWPC151M250V16x36F	150		0.15	460	1.66	2,000



STANDARD VALUES, SPECIFICATIONS AND CASE SIZES (mm)

Part Number	Cap. (μF)	W.V. (Vdc)	Dissipation Factor +20°C/120Hz	Ripple Current Rating (mA) +105°C/120Hz	Max. ESR (Ω) +20°C/120Hz	Load Life Hours @+105°C	
NRWPC181M250V18x36F	180	250	0.15	470	1.38	2,000	
NRWPC221M250V18x36F	220		0.15	485	1.13	2,000	
NRWPC331M250V18x45F	330		0.15	610	0.75	2,000	
NRWPCR47M350V5x11F	0.47	350	0.2	11	705.83	2,000	
NRWPC1R0M350V6.3x11F	1.0		0.2	15	331.74	2,000	
NRWPC2R2M350V8x12F	2.2		0.2	23	150.79	2,000	
NRWPC3R3M350V8x12F	3.3		0.2	30	100.53	2,000	
NRWPC4R7M350V10x12F	4.7		0.2	40	70.58	2,000	
NRWPC6R8M350V10x16F	6.8		0.2	42	48.79	2,000	
NRWPC100M350V10x20F	10		0.2	70	33.17	2,000	
NRWPC150M350V12.5x20F	15		0.2	140	22.12	2,000	
NRWPC220M350V12.5x25F	22		0.2	145	15.08	2,000	
NRWPC330M350V16x25F	33		0.2	165	10.05	2,000	
NRWPC470M350V16x25F	47		0.2	200	7.06	2,000	
NRWPC560M350V16x32F	56		0.2	230	5.92	2,000	
NRWPC680M350V16x36F	68		0.2	240	4.88	2,000	
NRWPC820M350V18x32F	82		0.2	280	4.05	2,000	
NRWPC101M350V18x32F	100		0.2	320	3.32	2,000	
NRWPC121M350V18x36F	120		0.2	365	2.76	2,000	
NRWPC151M350V18x40F	150		0.2	400	2.21	2,000	
NRWPC181M350V18x45F	180		0.2	460	1.84	2,000	
NRWPCR47M400V6.3x11F	0.47		400	0.2	15	705.83	2,000
NRWPC1R0M400V6.3x11F	1.0			0.2	14	331.74	2,000
NRWPC2R2M400V8x12F	2.2	0.2		25	150.79	2,000	
NRWPC3R3M400V8x12F	3.3	0.2		30	100.53	2,000	
NRWPC4R7M400V10x16F	4.7	0.2		42	70.58	2,000	
NRWPC6R8M400V10x16F	6.8	0.2		45	48.79	2,000	
NRWPC100M400V10x20F	10	0.2		70	33.17	2,000	
NRWPC150M400V12.5x20F	15	0.2		90	22.12	2,000	
NRWPC220M400V12.5x25F	22	0.2		140	15.08	2,000	
NRWPC330M400V16x25F	33	0.2		165	10.05	2,000	
NRWPC470M400V16x25F	47	0.2		200	7.06	2,000	
NRWPC560M400V16x32F	56	0.2		210	5.92	2,000	
NRWPC680M400V16x36F	68	0.2		240	4.88	2,000	
NRWPC820M400V18x32F	82	0.2		270	4.05	2,000	
NRWPC101M400V18x32F	100	0.2		310	3.32	2,000	
NRWPC121M400V18x36F	120	0.2		340	2.76	2,000	
NRWPC151M400V18x40F	150	0.2		375	2.21	2,000	
NRWPC181M400V18x45F	180	0.2		410	1.84	2,000	
NRWPCR47M450V6.3x11F	0.47	450		0.2	16	705.83	2,000
NRWPC1R0M450V8x12F	1.0			0.2	21	331.74	2,000
NRWPC2R2M450V8x12F	2.2		0.2	22	150.79	2,000	
NRWPC3R3M450V10x12F	3.3		0.2	30	100.53	2,000	
NRWPC4R7M450V10x16F	4.7		0.2	36	70.58	2,000	
NRWPC6R8M450V10x20F	6.8		0.2	40	48.79	2,000	
NRWPC100M450V12.5x20F	10		0.2	75	33.17	2,000	
NRWPC150M450V12.5x25F	15		0.2	80	22.12	2,000	
NRWPC220M450V16x25F	22		0.2	105	15.08	2,000	
NRWPC330M450V16x32F	33		0.2	130	10.05	2,000	
NRWPC470M450V18x32F	47		0.2	160	7.06	2,000	
NRWPC560M450V18x32F	56		0.2	170	5.92	2,000	
NRWPC680M450V18x36F	68		0.2	190	4.88	2,000	
NRWPC820M450V18x40F	82		0.2	200	4.05	2,000	
NRWPC101M450V18x40F	100		0.2	215	3.32	2,000	
NRWPC121M450V18x45F	120		0.2	230	2.76	2,000	

RIPPLE CURRENT FREQUENCY CORRECTION FACTOR


Voltage	Cap. (μF)	60Hz	120Hz	1KHz	10KHz	100KHz
160 ~ 250V	0.47 ~ 68	0.75	1.00	1.57	2.00	2.00
	100 ~ 560	0.80	1.00	1.34	1.40	1.50
350 ~ 450V	0.47 ~ 180	0.80	1.00	1.40	1.40	1.40



STANDARD RADIAL TAPING (5mm LEAD SPACING, FORMED LEADS) TB

Taping Dimensions (mm)


Case Dia. (D ϕ)	5	6.3	8
Case Size Dim.	5x11	6.3x11	8x12
d ϕ \pm 0.05	0.5	0.5	0.6
H \pm 0.75	18.5	18.5	20.0
F $+0.8 \sim -0.2$	5.0 $-0.2 \sim +0.8$		
P	12.7 \pm 1.0		
P ₀	12.7 \pm 0.2		
P ₁	3.85 \pm 0.5 (at end of tape)		
P ₂	6.35 \pm 1.0		
W	18.0 \pm 0.5		
W ₀	11.5 min.		
W ₁	9.0 \pm 0.5		
W ₂	0 \sim 2.5		
H ₀	16.0 \pm 0.5		
l	1.0 max.		
D ₀ ϕ	4.0 \pm 0.2		
Δ h	0 \pm 1.0 (at top of can)		
t	0.7 \pm 0.2 (not including lead)		

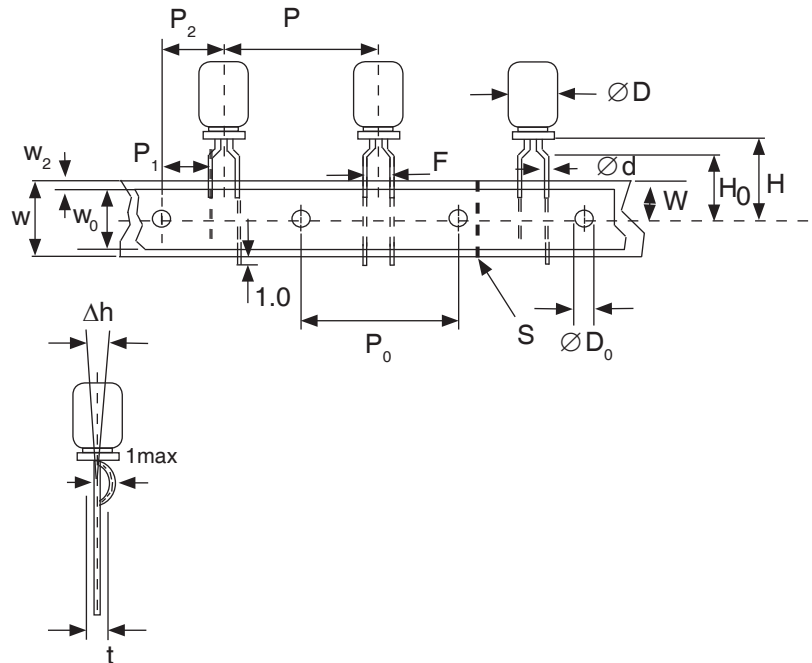

STANDARD RADIAL TAPING (5mm LEAD SPACING, STRAIGHT LEADS) TB

Taping Dimensions (mm)

Case Dia. (D ϕ)	10	12.5
Case Size Dim.	All	All
d ϕ \pm 0.05	0.6	0.6
H \pm 0.75	19.0	19.0
F $+0.8 \sim -0.2$	5.0	5.0
P \pm 1.0	25.4*	
P ₀	12.7 \pm 0.2	
P ₁	3.85	
P ₂	6.35 \pm 1.0	
W	18.0 \pm 0.5	
W ₀	11.5 min	
W ₁	9.0 \pm 0.5	
W ₂	0 \sim 2.5	
H ₀	16.0 \pm 0.5	
l	1.0 max.	
D ₀ ϕ	4.0 \pm 0.2	
Δ h	0 \pm 1.0 (at top of can)	
t	0.7 \pm 0.2 (not including lead)	

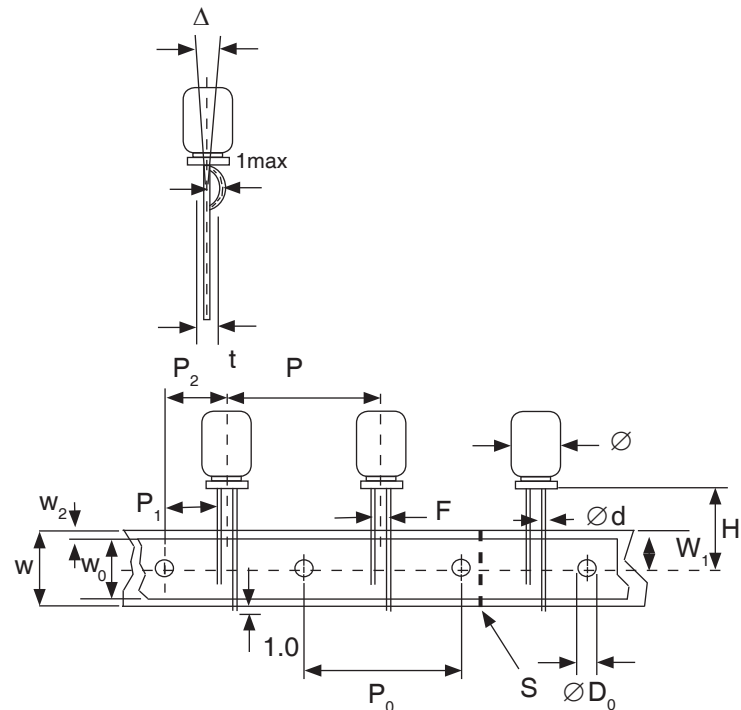

*Optional Taping Specifications

10mm diameter available with P dim. = 12.7mm
(P/N Suffix: TB12.7MMP)


12.5mm diameter available with P dim. = 15mm, P₁ = 5.0mm,
P₀ = 15.0mm & P₂ = 7.5mm (P/N Suffix: TB15MMP)

NOTE: ANODE (+) LEAD FEEDS OFF FIRST.
FOR OPTION OF NEGATIVE (-) LEAD FIRST,
SPECIFY "TBN".



Taping Dimensions (mm)

Case Dia. (D ϕ)	5
Case Size Dim.	5x11
d ϕ \pm 0.05	0.5
H \pm 0.75	18.5
H ₀ \pm 0.5	-
F	2.5 -0.2 ~ +0.8
P	12.7 \pm 1.0
P ₀	12.7 \pm 0.2
P ₁	5.1 \pm 0.5
P ₂	6.35 \pm 1.0
W	18.0 \pm 0.5
W ₀	11.5 min.
W ₁	9.0 \pm 0.5
W ₂	0 ~ 1.5
l	1.0 max.
D ₀ ϕ	4.0 \pm 0.2
Δ h	0 \pm 1.0
t	0.7 \pm 0.2

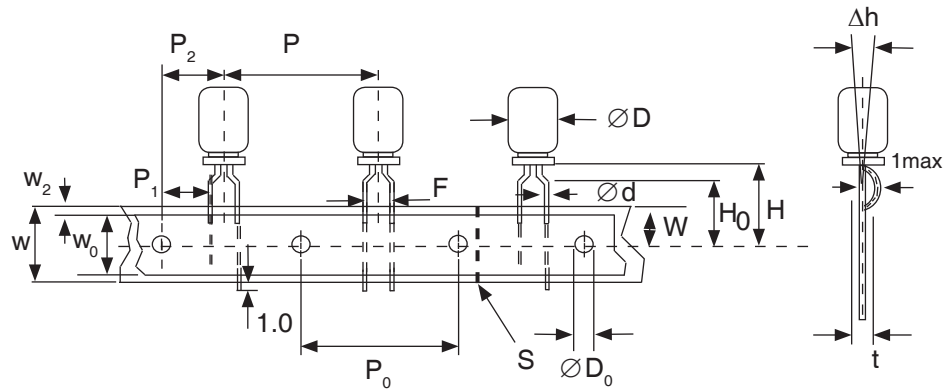


SPECIAL STRAIGHT LEAD TAPING TBST*

Taping Dimensions (mm)


Case Dia. (D ϕ)	5	6.3	8
Case Size Dim.	5x11	6.3x11	8x12
d ϕ \pm 0.05	0.5	0.5	0.6
H \pm 0.75	18.5	18.5	20.0
F +0.8 ~ -0.2	2.0	2.5	3.5
P \pm 1.0	12.7 \pm 0.2		
P ₀	12.7 \pm 0.2		
P ₁	5.1	5.1	4.6
P ₂	6.35 \pm 1.0		
W	18.0 \pm 0.5		
W ₀	11.5 min.		
W ₁	9.0 \pm 0.5		
W ₂	0 ~ 2.5		
H ₀	16.0 \pm 0.5		
l	1.0 max.		
D ₀ ϕ	4.0 \pm 0.2		
Δ h	0 \pm 1.0 (at top of can)		
t	0.7 \pm 0.2 (not including lead)		

* Parts with 4mm diameter are taped with a slight flare in the lead and a 2.0mm lead-space.

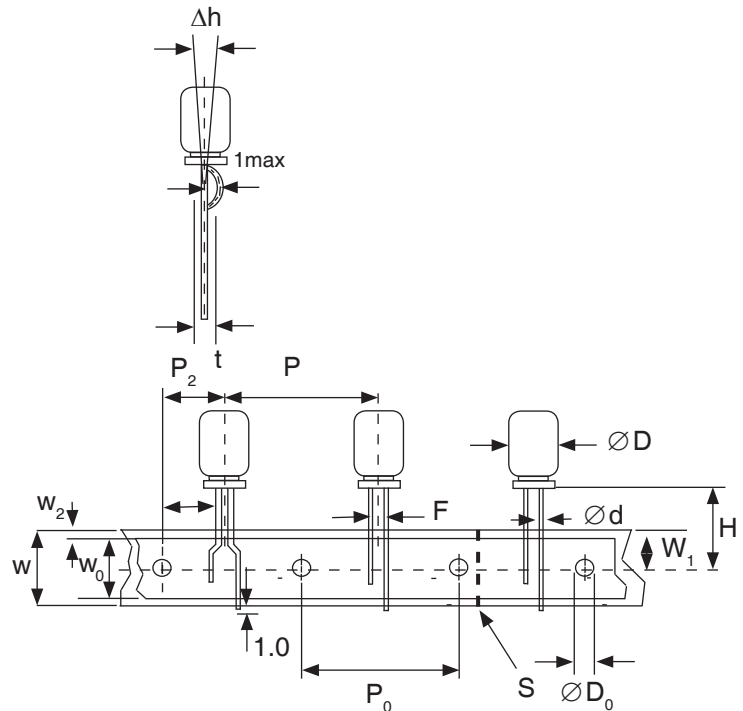

*Straight leads will extend from the based of the component to the edge of the carrier. The section of lead below the adhesive tape may be straight or formed.



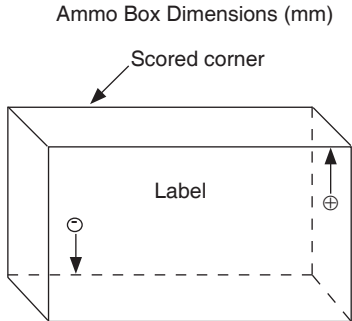

Ammo Box (Tape & Box) TB, TBF1, TBST

Box Quantity

Case Dia (Dφ) or Case Size	Q'ty per Box (pcs)
5x11	2,000
6.3x11	2,000
8x12	1,000
10x12	500
10x20	500
12.5x20	500
12.5x25	500

