

1. Part No. Expression:

CMT03 - 330 - RA - □□

(a) (b) (c) (d)(e) (f)

(a) Series Code

(b) Dimension Code


(c) Impedance Code

(d) Packaging Code

(e) Current Rating Code

(f) 10: Standard Code , 11-99: Internal Control Code

2. Configuration & Dimensions

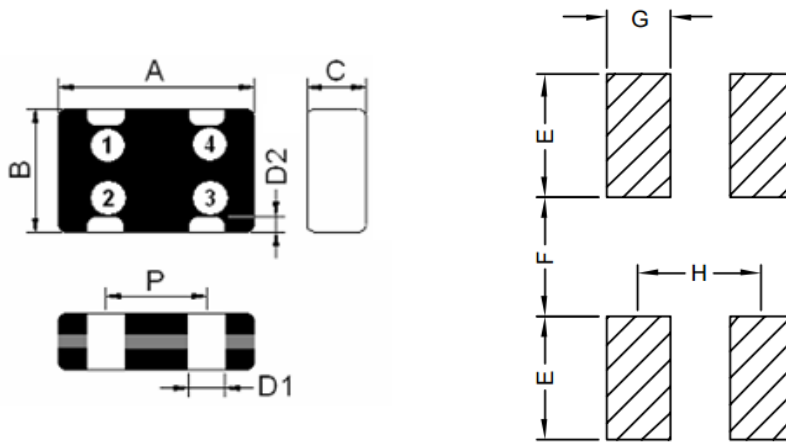

Recommended PCB layout


Unit: mm

A	B	C	P	D1	D2	E	F	G	H
0.85±0.05	0.65±0.05	0.40±0.05	0.50±0.10	0.27±0.10	0.20+0.05/-0.1	0.25 - 0.35	0.25 - 0.35	0.25 - 0.35	0.5

NOTE: Specifications subject to change without notice. Please check our website for latest information.



3. Schematic

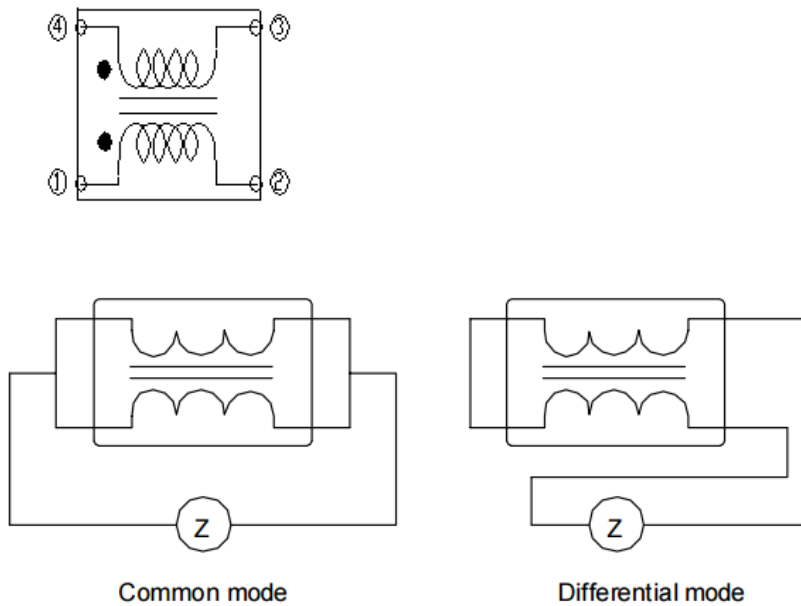

4. General Specification

- (a) Operating Temp. : -40°C to +85°C
- (b) Storage Condition (Component in its packaging)
 - i) Temperature: Less than 40°C
 - ii) Humidity : 60% RH


5. Electrical Characteristics

Part Number	Impedance (Ω)	Test Frequency (MHz)	DC Resistance (Ω) Max.	IDC (mA) Max.	Rated Voltage (Vdc) Max.	Insulation Resistance (M Ω) Min.
CMT03-120-RA-10	12 \pm 5 Ω	100	2.5	130	5	100
CMT03-330-RA-10	33 \pm 20%	100	2.5	100	5	100
CMT03-470-RA-10	47 \pm 20%	100	5.0	100	5	100
CMT03-900-RA-10	90 \pm 20%	100	6.5	100	5	100

NOTE: Specifications subject to change without notice. Please check our website for latest information.

6. Packaging Information:


6-1 Reel Dimension

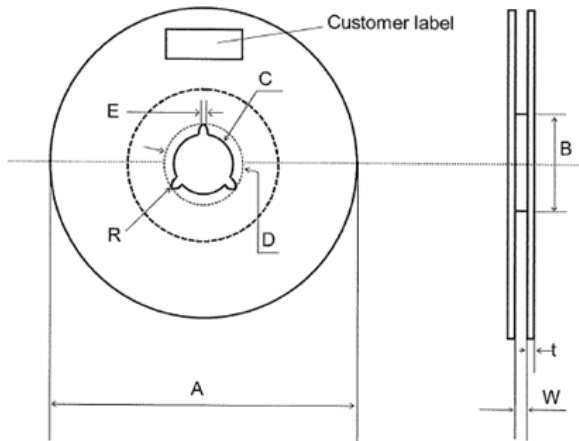

Unit: mm

$\varnothing A$	$\varnothing B$	$\varnothing C$	$\varnothing D$	E	W	t	R
178±2.0	50 Min.	13±0.2	21±0.8	2.0±0.5	10±1.5	2.5 Max.	1.0

6-2 Tape Dimension

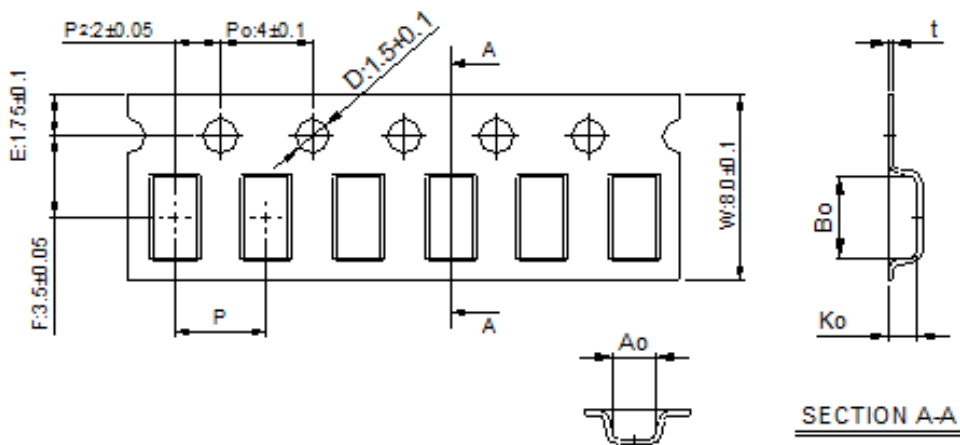


Size	Bo (mm)	Ao (mm)	Ko (mm)	P (mm)	t (mm)
CMT03	0.95±0.05	0.75±0.05	0.55±0.05	4.0±0.10	0.3 max

NOTE: Specifications subject to change without notice. Please check our website for latest information.

6-3 Packaging Quantity

Chip Size	CMT03
Chip /Reel	10,000
Inner box	50,000
Middle box	250,000
Carton	500,000

6-4 Tearing Off Force

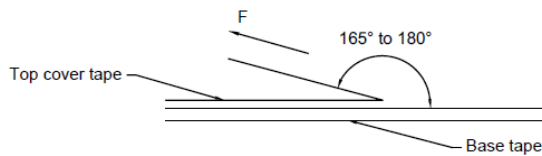

The force for tearing off cover tape is 15 to 85 grams in the arrow direction under the following conditions.

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed mm/min
5~35	45~85	860~1060	300

Application Notice:

1. Storage Conditions:

To maintain the solderability of terminal electrodes:

- a) Recommended products should be used within 12 months from the time of delivery.
- b) The packaging material should be kept where no chlorine or sulfur exists in the air.

2. Transportation:

- a) Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- b) Vacuum pick up is strongly recommended for individual components.
- c) Bulk handling should ensure that abrasion and mechanical shock are minimized.

NOTE: Specifications subject to change without notice. Please check our website for latest information.

