

1. PART NO. EXPRESSION :

P I C 0 6 0 3 H 1 R 0 M F - □ □
(a) (b) (c) (d) (e)(f) (g)

(a) Series code

(b) Dimension code

(c) Type code


(d) Inductance code : 1R0 = 1.0uH

(e) Tolerance code : M = $\pm 20\%$, Y = $\pm 30\%$

(f) F : RoHS Compliant

(g) 11~99 : Internal controlled number

2. CONFIGURATION & DIMENSIONS :

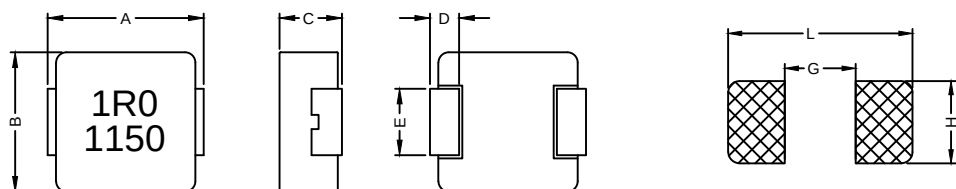


Recommended PC Board Pattern


Unit:m/m

A	B	C	D	E	G	H	L
7.3 $\pm$ 0.3	6.6 $\pm$ 0.3	2.8 $\pm$ 0.2	1.8 $\pm$ 0.3	3.0 $\pm$ 0.3	2.5	3.5	8.4

3. SCHEMATIC :



4. MATERIALS :



(a) Core

(b) Wire

(c) Terminal

(d) Ink

(e) Paint



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

06.11.2015



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 1

5. GENERAL SPECIFICATION :

- a) Test Freq. : L : 100KHz/1.0V
- b) Operating Temp. : -40°C to +125°C
- c) Storage Temp. : -40°C to +125°C
- d) Humidity Range : 85 ± 3% RH
- e) Heat Rated Current (Irms) will cause the coil temperature rise approximately Δt of 40°C (keep 1min)
- f) Saturation Current (Isat) will cause L0 to drop 20%.
- g) Part Temperature (Ambient+Temp. Rise) : Should not exceed 125°C under worst case operating conditions.
- h) Storage condition (component in its packaging)
 - i) Temperature: -10 to 40°C
 - ii) Humidity : 50~60% RH

6. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance Lo (μ H) @ 0 A	Irms (A) Typ.	Isat (A) Typ.	DCR (m Ω) Typ. @ 25°C	DCR (m Ω) Max. @ 25°C
PIC0603HR10YF	0.10	32.5	60	1.2	1.7
PIC0603HR13YF	0.13	27.6	50	1.3	1.8
PIC0603HR15YF	0.15	27	45	1.5	1.9
PIC0603HR16YF	0.16	27	45	1.5	1.9
PIC0603HR18YF	0.18	25	43	1.7	2.3
PIC0603HR19YF	0.19	24	41	1.8	2.5
PIC0603HR20YF	0.20	24	41	1.8	2.5
PIC0603HR22YF	0.22	23	40	2.1	2.8
PIC0603HR25MF	0.25	21	39	3.3	3.5
PIC0603HR33MF	0.33	20	32	3.5	3.9
PIC0603HR36MF	0.36	19	32	3.6	4.2
PIC0603HR40MF	0.40	18.0	27.5	3.71	4.1
PIC0603HR47MF	0.47	17.5	26	4	4.2
PIC0603HR56MF	0.56	16.5	25.5	4.7	5
PIC0603HR60MF	0.60	16	25.5	4.7	5.2
PIC0603HR68MF	0.68	15.5	25	4.8	5.5
PIC0603HR75MF	0.75	14.5	24.5	5.5	6.6
PIC0603HR82MF	0.82	13	24	6.7	8

Tolerance : M = $\pm 20\%$, Y = $\pm 30\%$ **RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.

06.11.2015

**SUPERWORLD ELECTRONICS (S) PTE LTD**

6. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance L _o (μ H) @ 0 A	I _{rms} (A) Typ.	I _{sat} (A) Typ.	DCR (m Ω) Typ. @ 25°C	DCR (m Ω) Max. @ 25°C
PIC0603HR90MF	0.90	11	22	8.3	10
PIC0603H1R0MF	1.00	11	22	8.3	10
PIC0603H1R2MF	1.20	10	20	10	12
PIC0603H1R5MF	1.50	9	18	13	15
PIC0603H1R8MF	1.80	8.5	16	14	17
PIC0603H2R0MF	2.00	8.2	15	16	19
PIC0603H2R2MF	2.20	8	14	18	20
PIC0603H2R5MF	2.50	7	13	20	22
PIC0603H2R7MF	2.70	7	13	24	27
PIC0603H3R3MF	3.30	6	13.5	28	30
PIC0603H4R7MF	4.70	5.5	10	37	40
PIC0603H5R6MF	5.60	5	9	43	48
PIC0603H6R8MF	6.80	4.5	8	54	60
PIC0603H8R2MF	8.20	4	7.5	64	68
PIC0603H100MF	10.0	3.5	6	75	85
PIC0603H120MF	12.0	3.3	5.5	81	93
PIC0603H150MF	15.0	3	4	107	123
PIC0603H180MF	18.0	2.5	4	140	160
PIC0603H220MF	22.0	2	3.5	165	190
PIC0603H330MF	33.0	2	2.5	200	240
PIC0603H470MF	47.0	1.75	2	302	363

Tolerance : M = $\pm 20\%$, Y = $\pm 30\%$ 

RoHS Compliant







NOTE : Specifications subject to change without notice. Please check our website for latest information.

06.11.2015



SUPERWORLD ELECTRONICS (S) PTE LTD

7. CHARACTERISTICS CURVES :

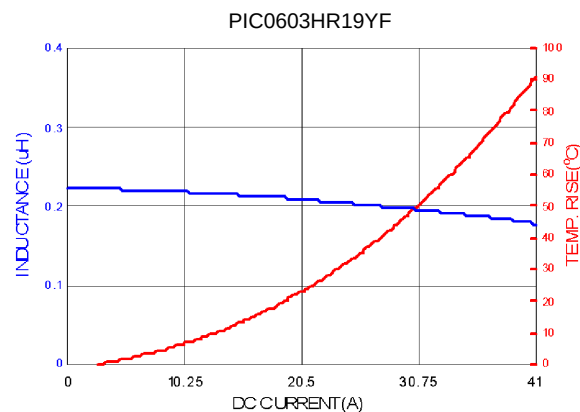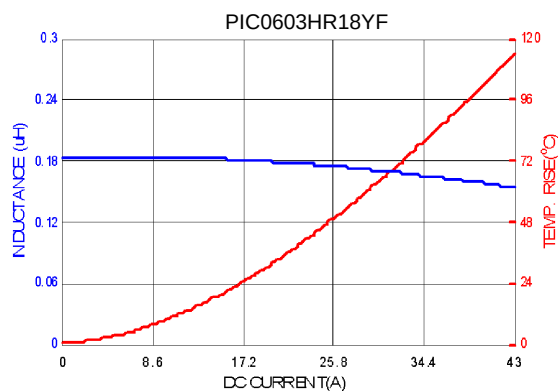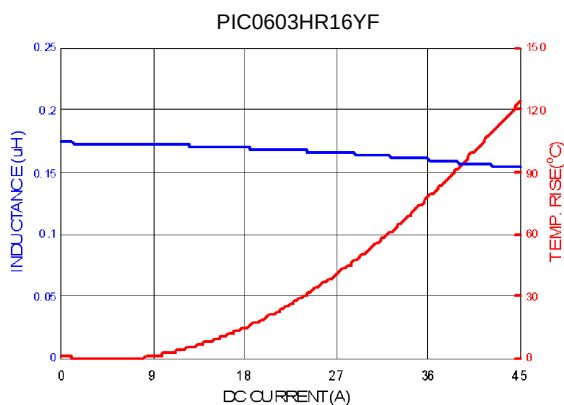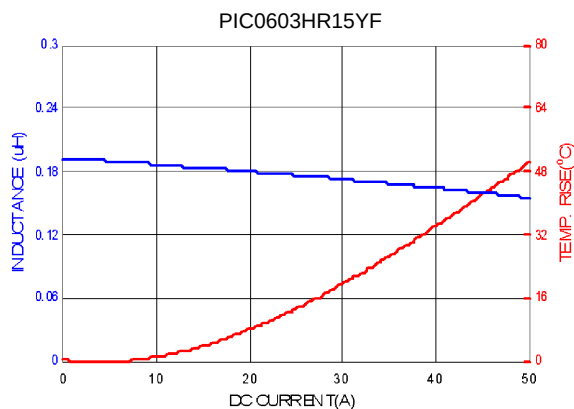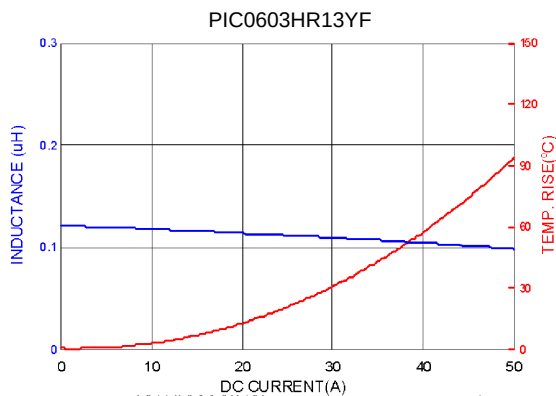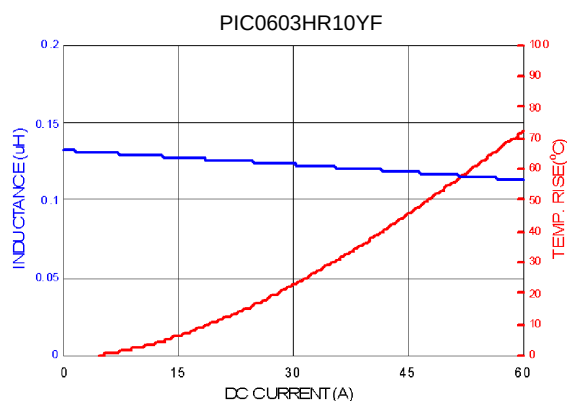

RoHS Compliant







NOTE : Specifications subject to change without notice. Please check our website for latest information.

06.11.2015



SUPERWORLD ELECTRONICS (S) PTE LTD

7. CHARACTERISTICS CURVES :

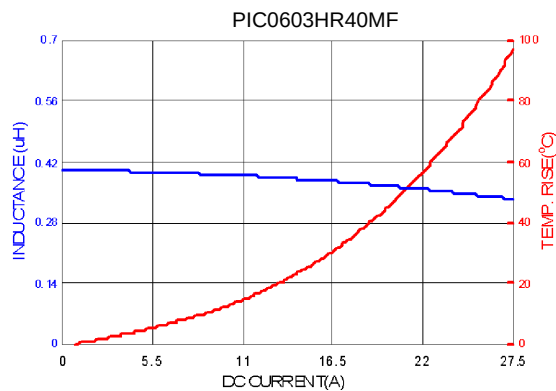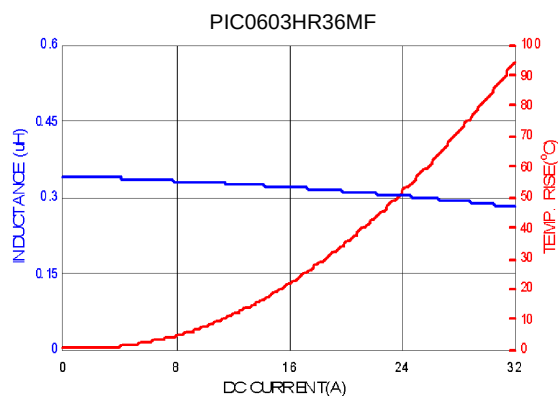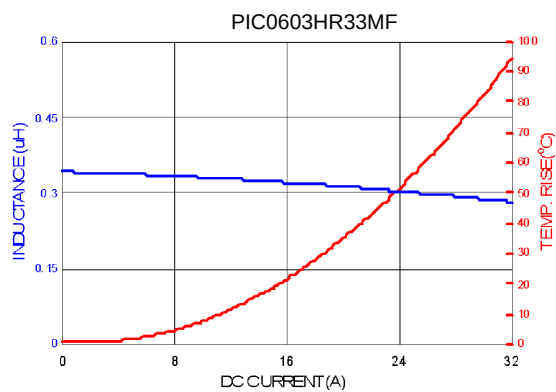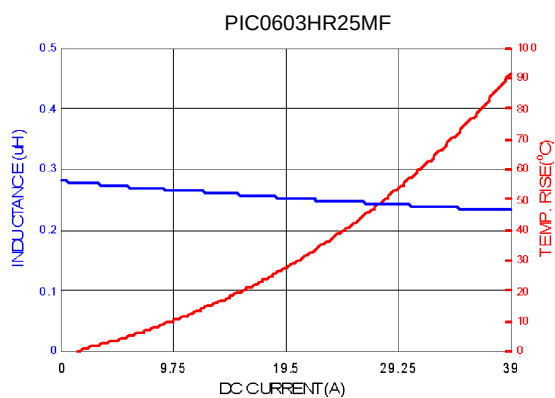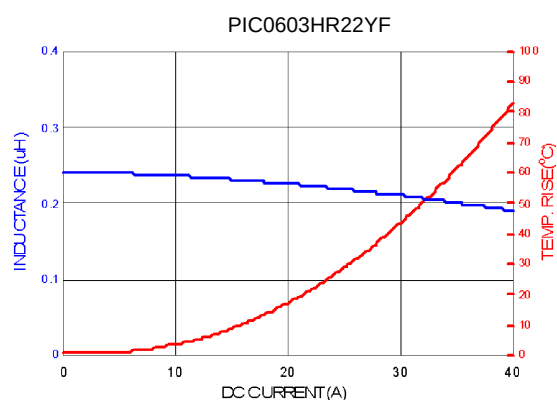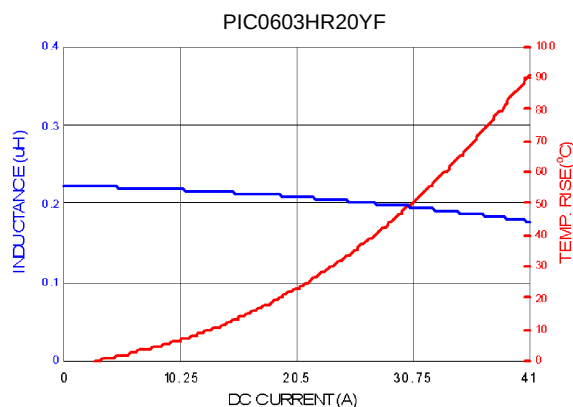

RoHS Compliant







NOTE : Specifications subject to change without notice. Please check our website for latest information.

06.11.2015



SUPERWORLD ELECTRONICS (S) PTE LTD

7. CHARACTERISTICS CURVES :

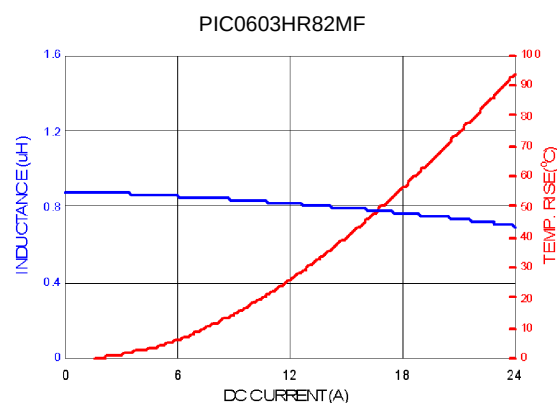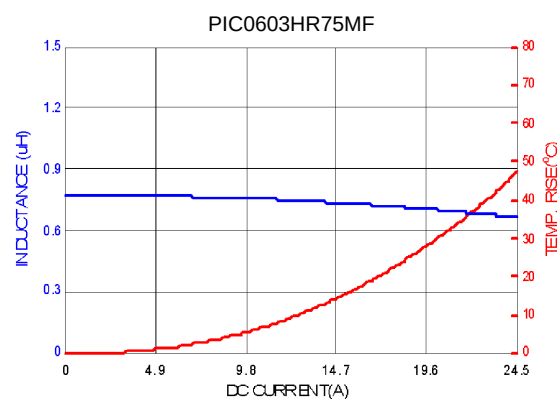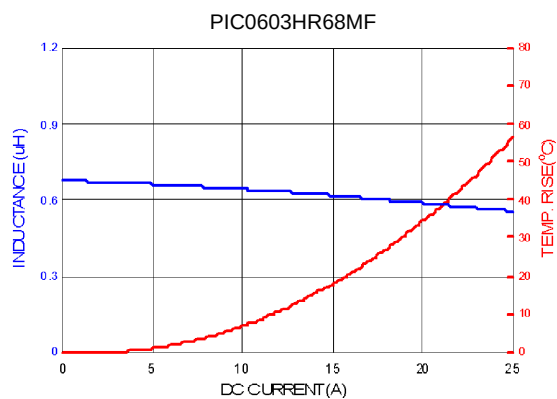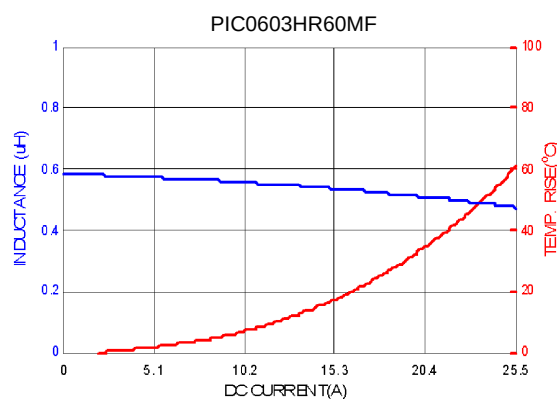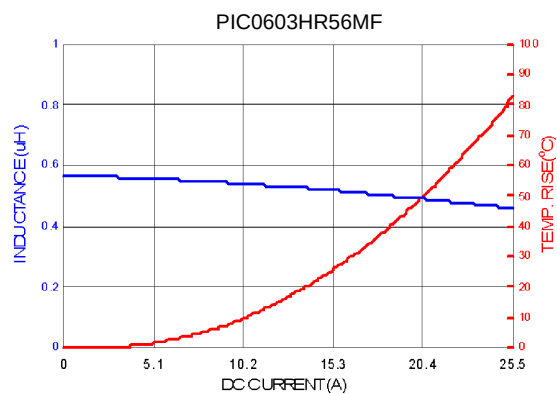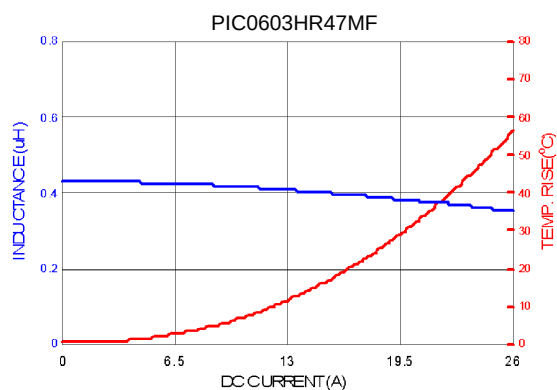

RoHS Compliant







NOTE : Specifications subject to change without notice. Please check our website for latest information.

06.11.2015



SUPERWORLD ELECTRONICS (S) PTE LTD

7. CHARACTERISTICS CURVES :

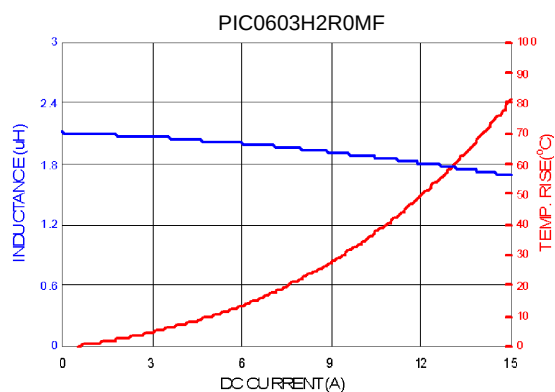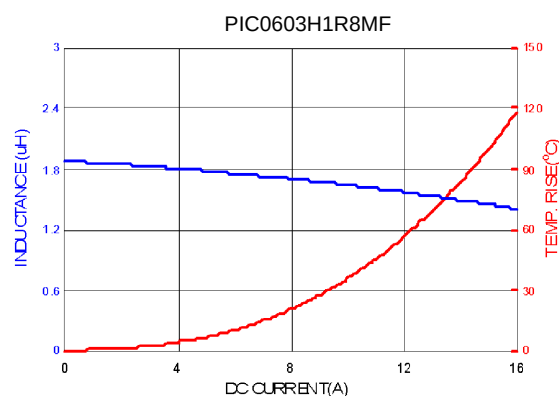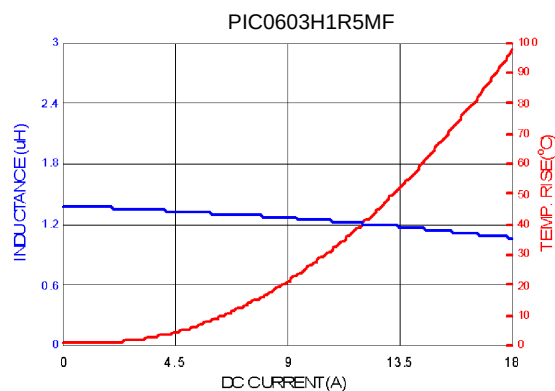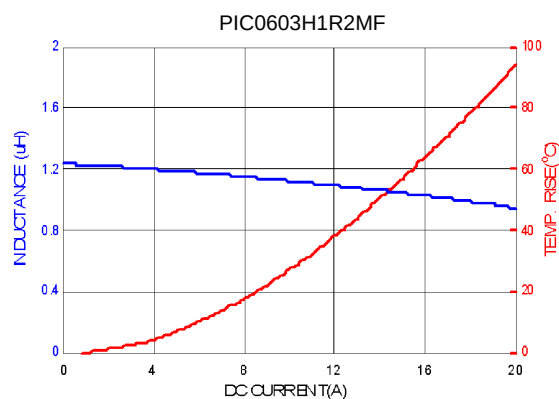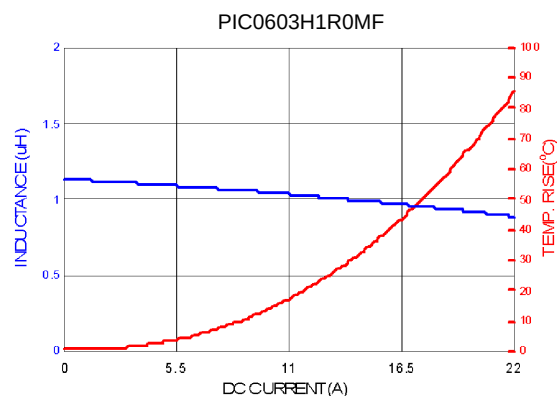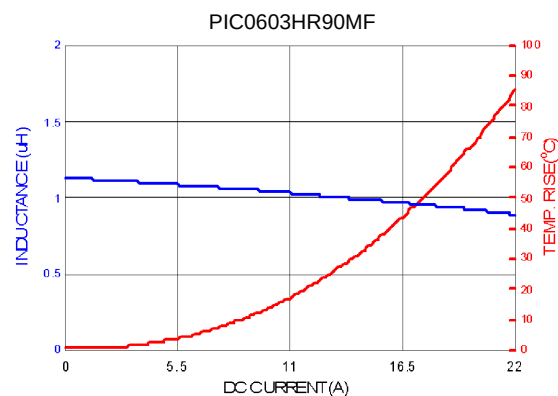

RoHS Compliant







NOTE : Specifications subject to change without notice. Please check our website for latest information.

06.11.2015



SUPERWORLD ELECTRONICS (S) PTE LTD

7. CHARACTERISTICS CURVES :

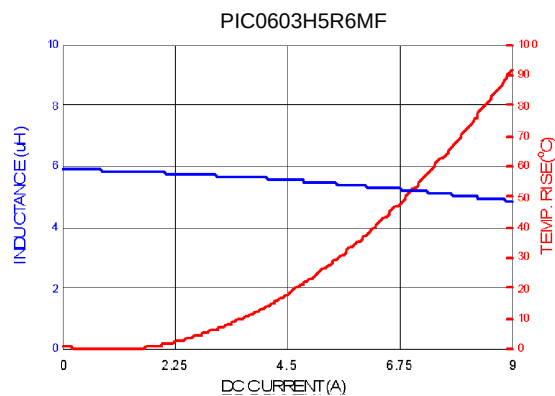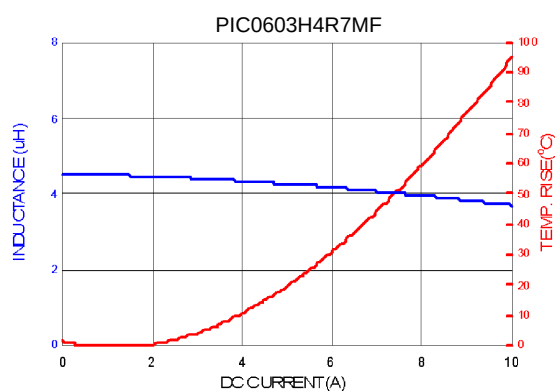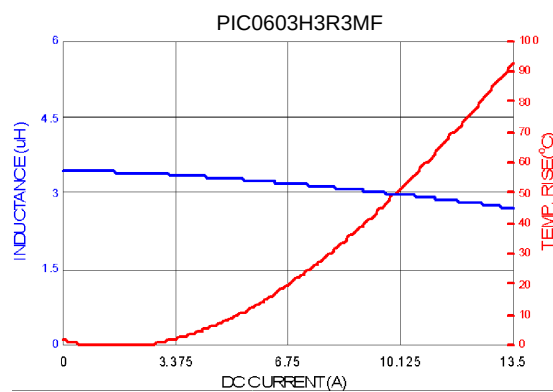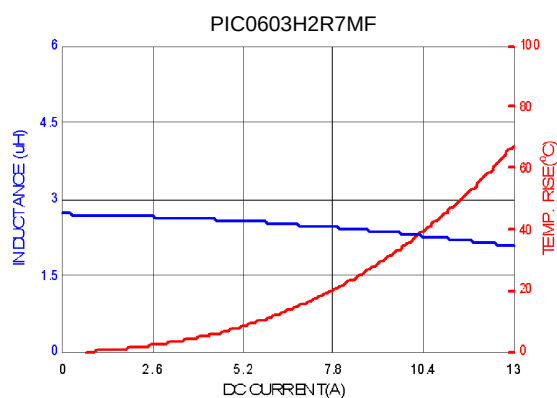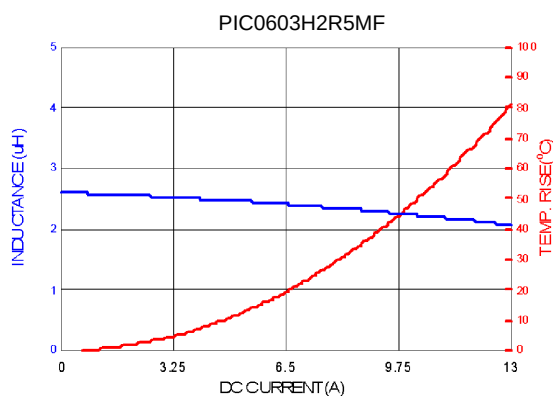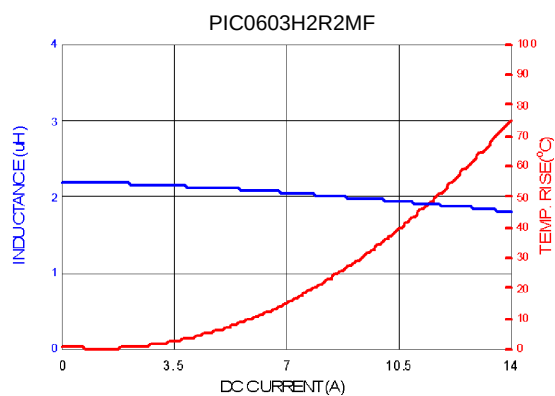

RoHS Compliant







NOTE : Specifications subject to change without notice. Please check our website for latest information.

06.11.2015



SUPERWORLD ELECTRONICS (S) PTE LTD

7. CHARACTERISTICS CURVES :

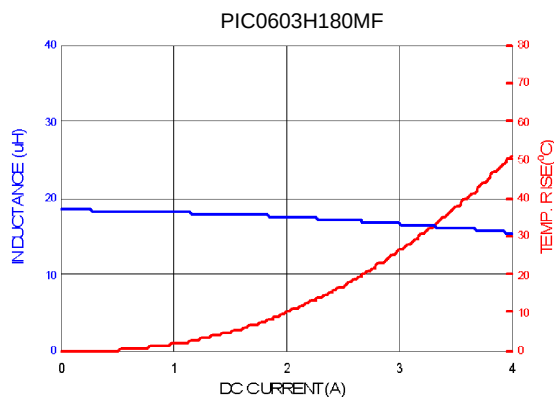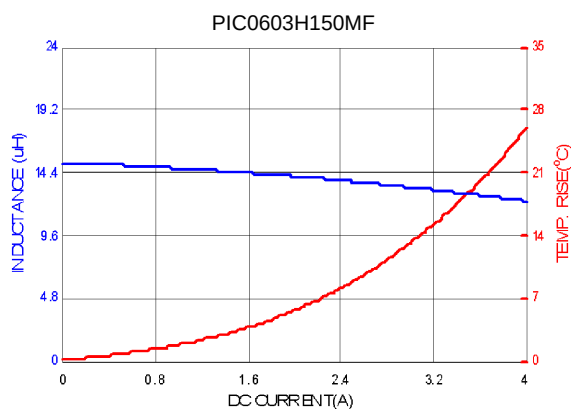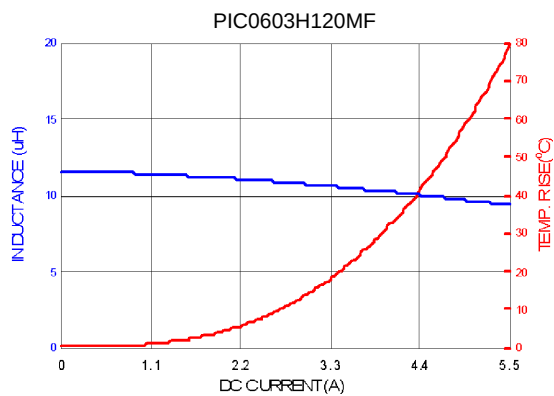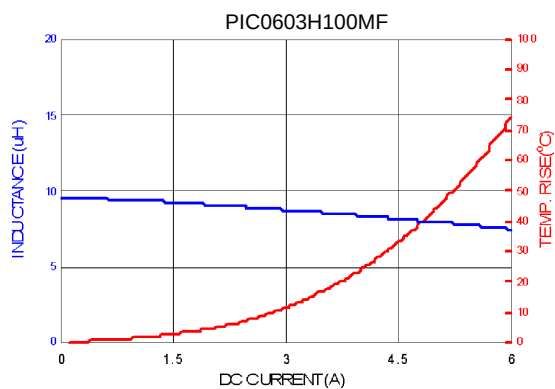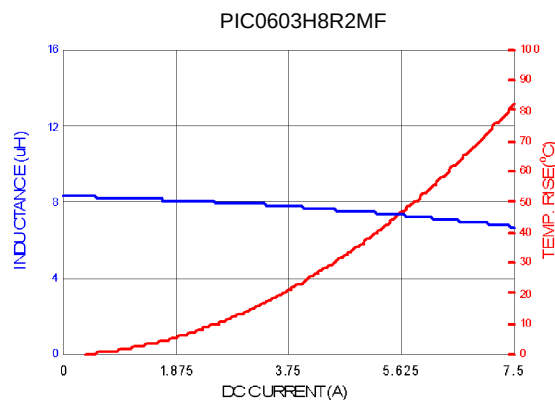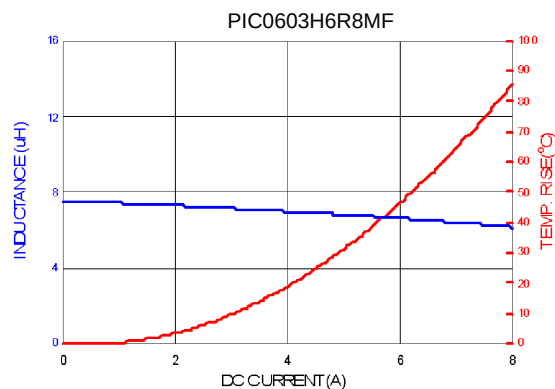

RoHS Compliant




NOTE : Specifications subject to change without notice. Please check our website for latest information.

06.11.2015



SUPERWORLD ELECTRONICS (S) PTE LTD

7. CHARACTERISTICS CURVES :

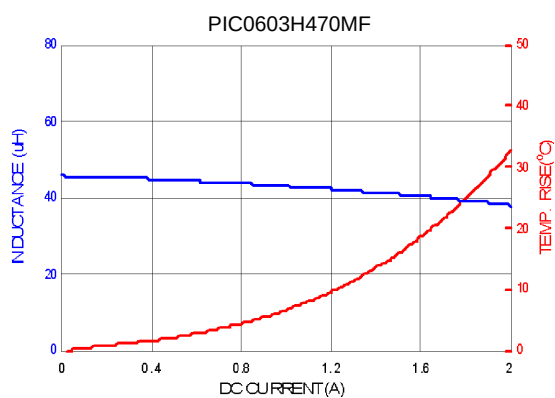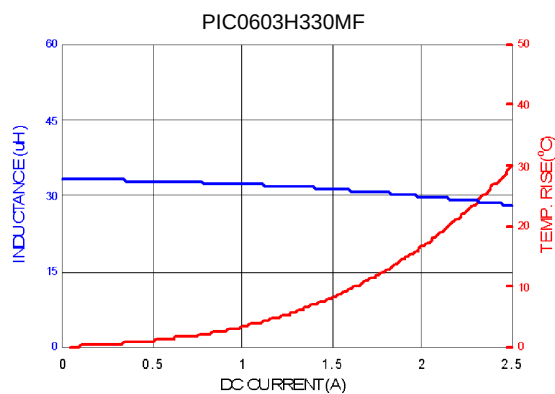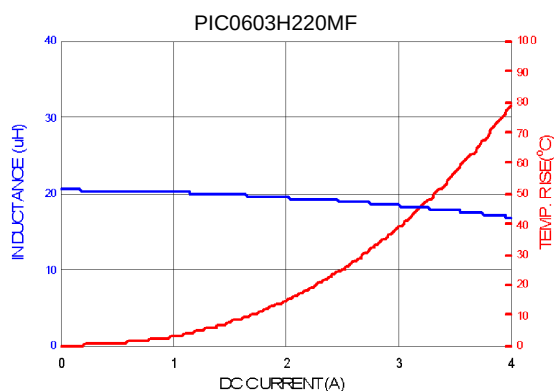

RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

06.11.2015



SUPERWORLD ELECTRONICS (S) PTE LTD

8. SOLDERING :

Mildly activated rosin fluxes are preferred. The minimum amount of solder can lead to damage from the stresses caused by the difference in coefficients of expansion between solder, chip and substrate. Our terminations are suitable for all re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

8-1.1 Solder Re-flow :

Recommended temperature profiles for re-flow soldering in Figure 1.

8-1.2 Soldering Iron (Figure 2) :

Products attachment with soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended.

Note :

- Preheat circuit and products to 150°C.
- 355°C tip temperature (max)
- Never contact the ceramic with the iron tip
- 1.0mm tip diameter (max)
- Use a 20 watt soldering iron with tip diameter of 1.0mm
- Limit soldering time to 4~5 secs.

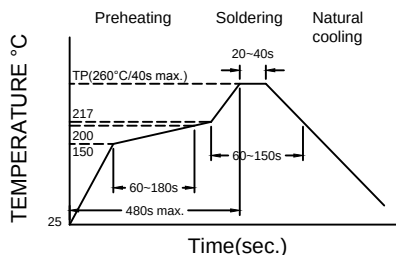


Figure 1. Re-flow Soldering: 3 times max.

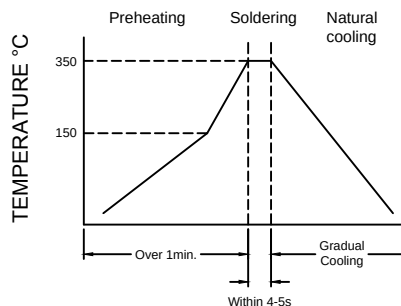


Figure 2. Iron Soldering: 1 times max.



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

06.11.2015




SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 11


9. PACKAGING INFORMATION :

9-1. Reel Dimension

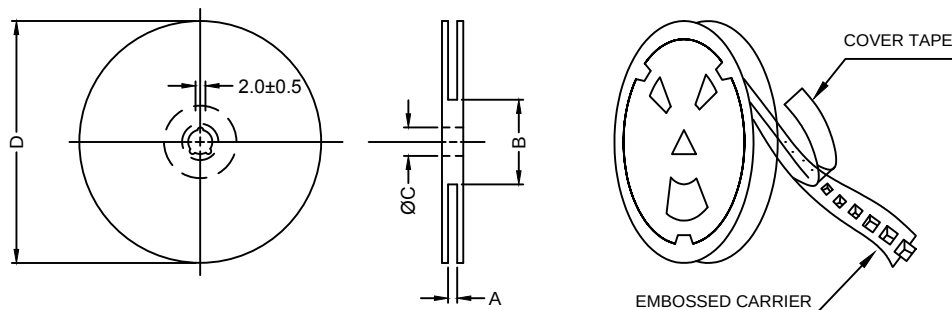

Type	A(mm)	B(mm)	C(mm)	D(mm)
13" x 16mm	$16.4 \pm 2.0 / -0$	100 ± 2.0	13.5 ± 0.5	330

9-2. Tape Dimension

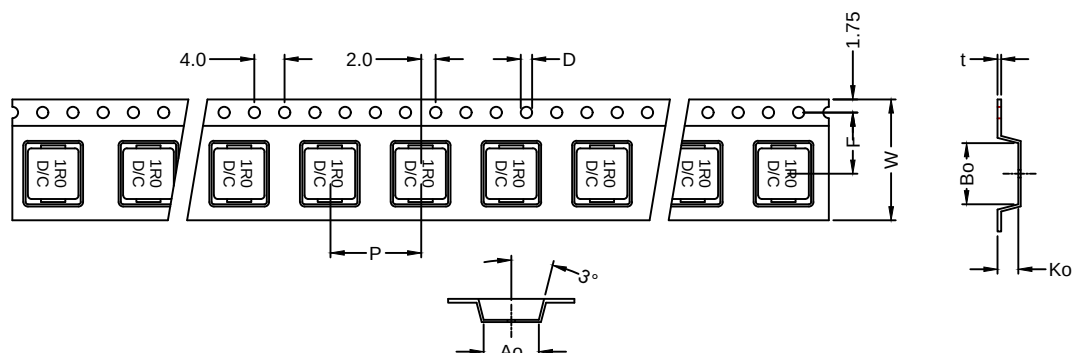

Series	Ao(mm)	Bo(mm)	Ko(mm)	P(mm)	W(mm)	F(mm)	t(mm)	D(mm)
PIC0603	7.0 ± 0.1	7.7 ± 0.1	3.3 ± 0.1	12.0 ± 0.1	16.0 ± 0.3	7.5 ± 0.1	0.35 ± 0.05	1.5 ± 0.1

9-3. Packaging Quantity

Size	PIC0603
Chip / Reel	1000
Inner Box	2000
Carton	8000



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.


06.11.2015



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 12

9-4. Tearing Off Force

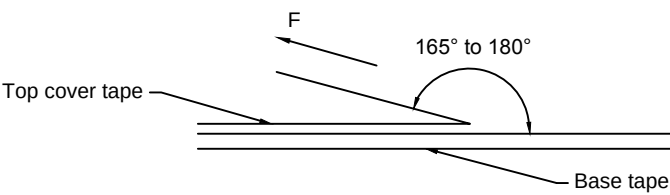

The force for tearing off cover tape is 10 to 130 grams in the arrow direction under the following conditions. (referenced ANSI/EIA-481-C-2003 of 4.11 standard)

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed (mm/min)
5~35	45~85	860~1060	300

Application Notice

- 1. Storage Conditions :
To maintain the solderability of terminal electrodes :
 - a) Recommended products should be used within 12 months from the time of delivery.
 - b) The packaging material should be kept where no chlorine or sulfur exists in the air.
- 2. Transportation :
 - a) Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
 - b) Vacuum pick up is strongly recommended for individual components.
 - c) Bulk handling should ensure that abrasion and mechanical shock are minimized.



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

06.11.2015