

1. PART NO. EXPRESSION :

P I C 1 7 0 7 H P 2 R 2 M F - □ □
(a) (b) (c) (d) (e)(f) (g)

(a) Series code

(b) Dimension code

(c) Type code


(d) Inductance code : 2R2 = 2.2uH

(e) Tolerance code : M = $\pm 20\%$, Y = $\pm 30\%$

(f) F : RoHS Compliant

(g) 11~99 : Internal controlled number


2. CONFIGURATION & DIMENSIONS :

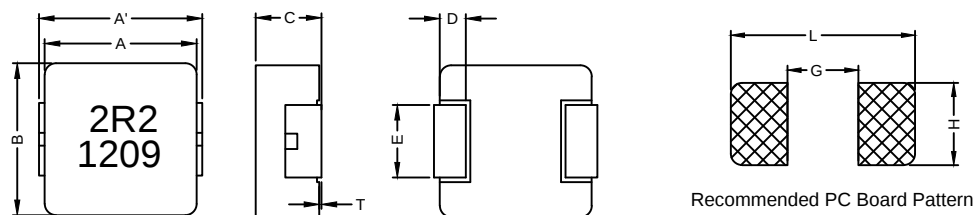


Unit:m/m

A	A'	B	C	D	E	T	G	H	L
16.9 $\pm$ 0.3	17.3 $\pm$ 0.4	16.9 $\pm$ 0.3	6.7 $\pm$ 0.3	2.1 $\pm$ 0.3	11.9 $\pm$ 0.3	0~+0.25	12.2	12.5	18.5

3. SCHEMATIC :



4. MATERIALS :



(a) Core

(b) Wire

(c) Terminal

(d) Ink

(e) Paint

5. GENERAL SPECIFICATION :

- Test Freq. : L : 100KHz/1.0V
- Operating Temp. : -40°C to +125°C
- Storage Temp. : -40°C to +125°C
- Humidity Range : 85 $\pm$ 3% RH
- Heat Rated Current (Irms) will cause the coil temperature rise approximately Δt of 40°C (keep 1min)
- Saturation Current (Isat) will cause L0 to drop 20%.
- Part Temperature (Ambient+Temp. Rise) : Should not exceed 125°C under worst case operating conditions.
- Storage condition (component in its packaging)
 - Temperature: -10 to 40°C
 - Humidity : 50~60% RH



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

05.11.2015





SUPERWORLD ELECTRONICS (S) PTE LTD

6. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance L_0 (μ H) @ 0 A	I _{rms} (A) Typ.	I _{sat} (A) Typ.	DCR (m Ω) Typ. @ 25°C	DCR (m Ω) Max. @ 25°C
PIC1707HP1R0MF	1.00	52	60	1.6	2.0
PIC1707HP1R5MF	1.50	47	52	2.0	2.5
PIC1707HP2R2MF	2.20	43.5	47	2.4	2.7
PIC1707HP3R3MF	3.30	28	45	3.5	3.9
PIC1707HP4R7MF	4.70	25	41	4.8	5.5
PIC1707HP5R6MF	5.60	21	40	5.8	7.05
PIC1707HP6R8MF	6.80	19	32	8.4	9.2
PIC1707HP8R2MF	8.20	18	25	9.6	10.8
PIC1707HP100MF	10.0	16.5	24	11.8	13.0
PIC1707HP150MF	15.0	12.5	23	17.8	20.5
PIC1707HP220MF	22.0	12	18	25.1	26.5
PIC1707HP330MF	33.0	10.7	15	38.0	44.0
PIC1707HP390MF	39.0	9.2	11	40.0	48.0
PIC1707HP470MF	47.0	8.7	9.5	48.0	55.0
PIC1707HP560MF	56	7.8	9.0	54.0	62.0
PIC1707HP680MF	68	7.0	8.0	68.0	80.0
PIC1707HP101MF	100	5.3	6.5	102.0	118.0

Tolerance code : M = $\pm 20\%$, Y = $\pm 30\%$

7. CHARACTERISTICS CURVES :

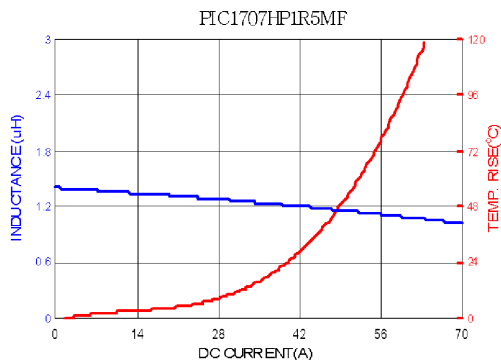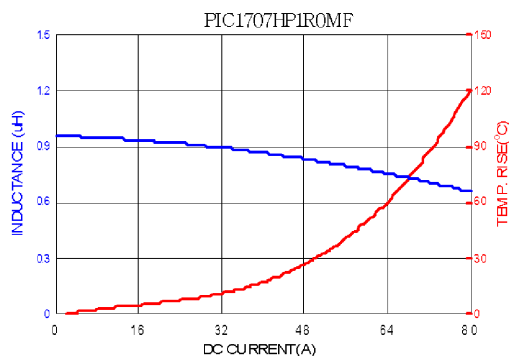

RoHS Compliant









NOTE : Specifications subject to change without notice. Please check our website for latest information.

05.11.2015



SUPERWORLD ELECTRONICS (S) PTE LTD

7. CHARACTERISTICS CURVES :

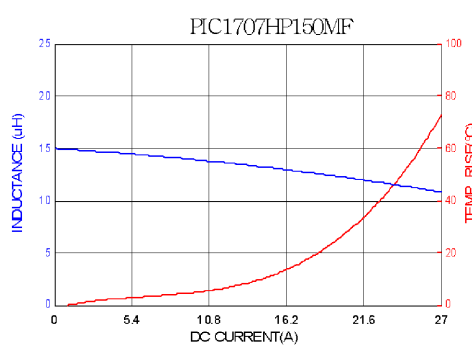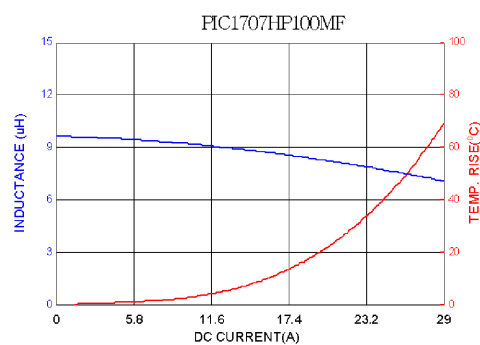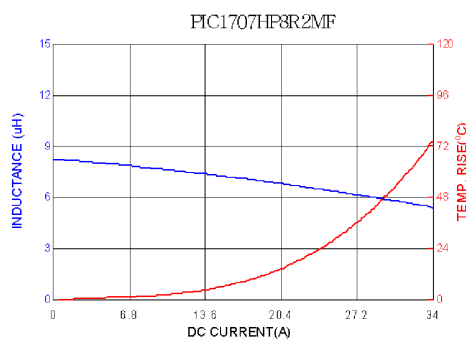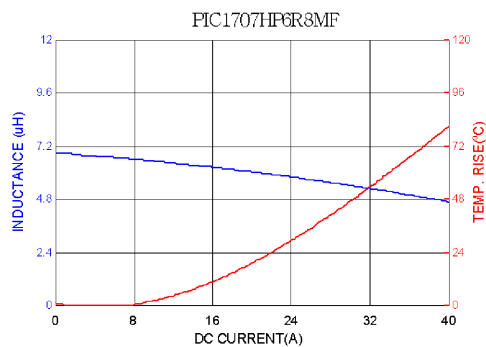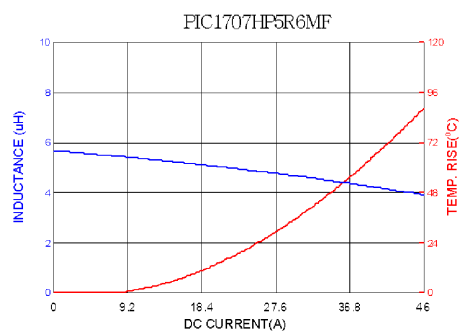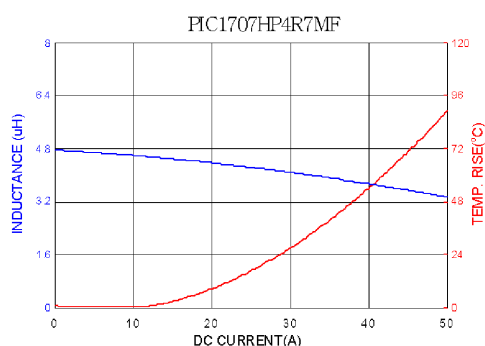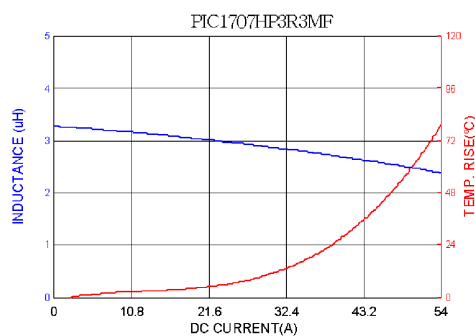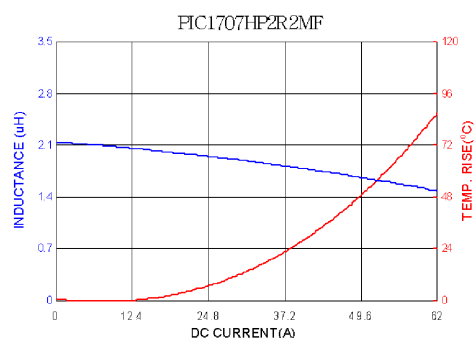

RoHS Compliant








NOTE : Specifications subject to change without notice. Please check our website for latest information.

05.11.2015



SUPERWORLD ELECTRONICS (S) PTE LTD

7. CHARACTERISTICS CURVES :

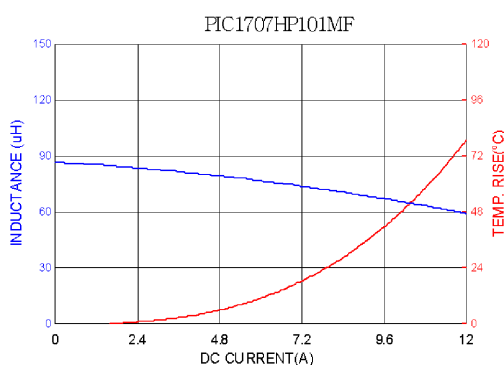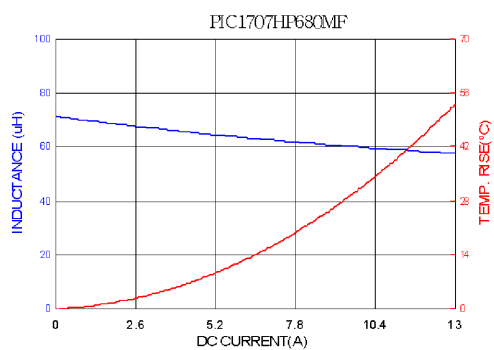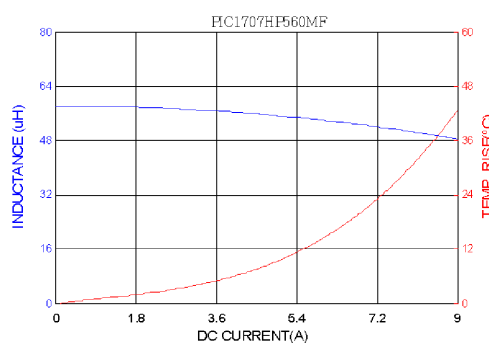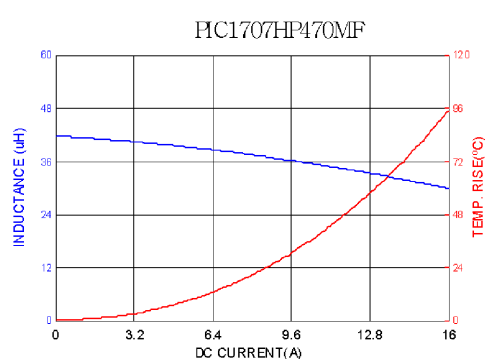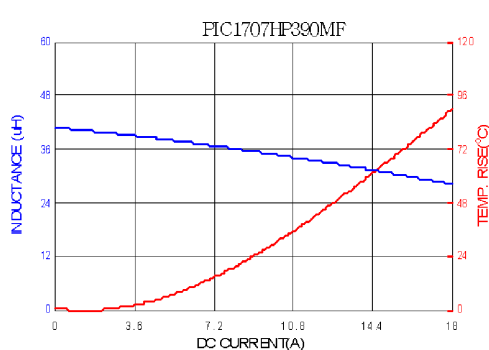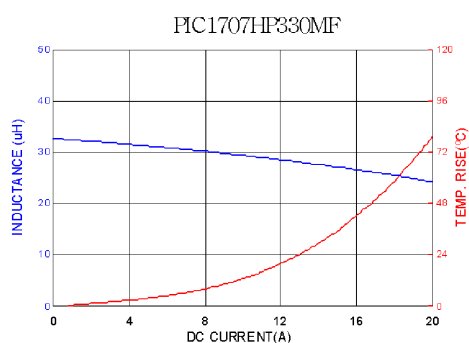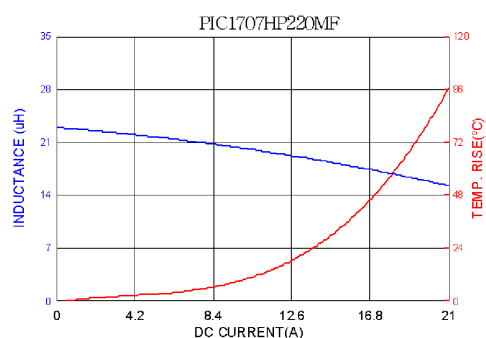

RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

05.11.2015



SUPERWORLD ELECTRONICS (S) PTE LTD

8. SOLDERING

Mildly activated rosin fluxes are preferred. The minimum amount of solder can lead to damage from the stresses caused by the difference in coefficients of expansion between solder, chip and substrate. Our terminations are suitable for all re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

8-1.1 Solder Re-flow :

Recommended temperature profiles for re-flow soldering in Figure 1.

8-1.2 Soldering Iron (Figure 2) :

Products attachment with soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended.

Note :

- Preheat circuit and products to 150°C.
- 355°C tip temperature (max)
- Never contact the ceramic with the iron tip
- 1.0mm tip diameter (max)
- Use a 20 watt soldering iron with tip diameter of 1.0mm
- Limit soldering time to 4-5 secs.

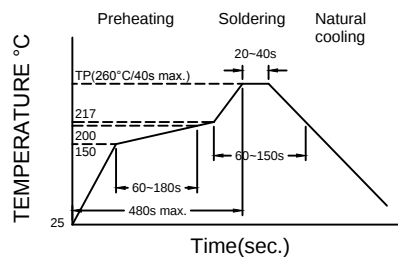


Figure 1. Re-flow Soldering: 3 times max.

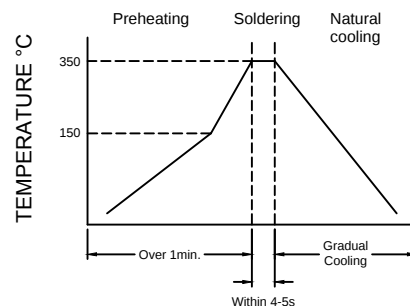


Figure 2. Hand Soldering: 1 times max.



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.


05.11.2015



SUPERWORLD ELECTRONICS (S) PTE LTD


9. PACKAGING INFORMATION :

9-1. Reel Dimension

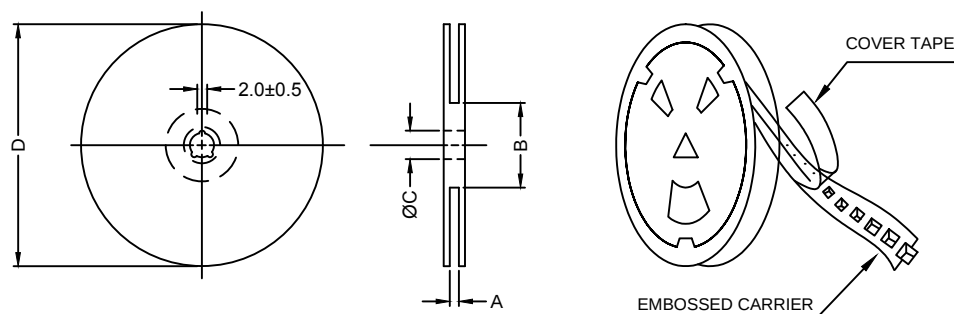

Type	A(mm)	B(mm)	C(mm)	D(mm)
13" x 32mm	32.4+2.0/-0	100±2	13.5±0.5	330

9-2. Tape Dimension

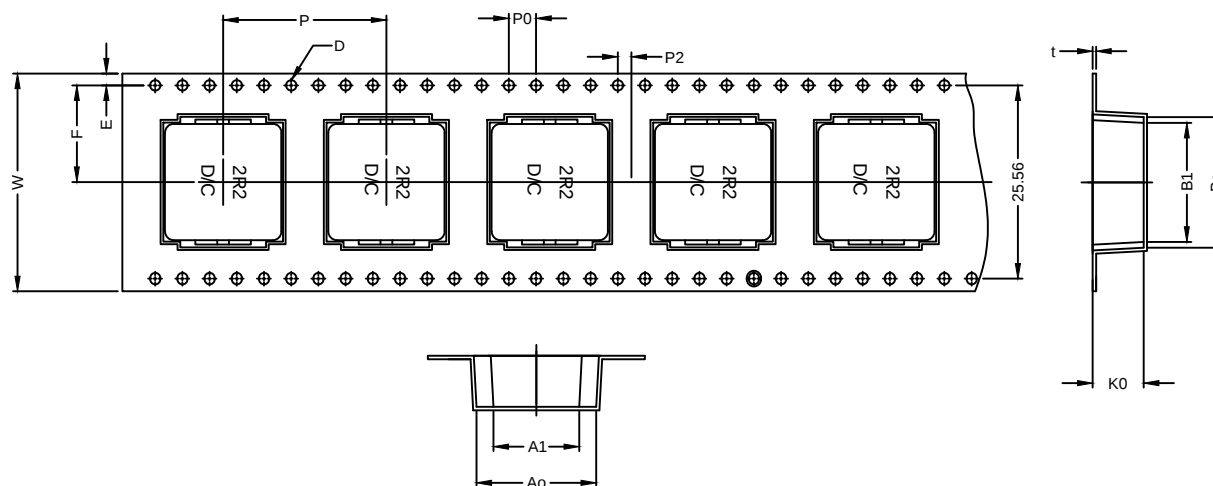

Series	Bo(mm)	B1(mm)	Ao(mm)	A1(mm)	Ko(mm)	P(mm)	P0(mm)	P2(mm)	W(mm)	E(mm)	F(mm)	t(mm)	D(mm)
PIC1707	18.5±0.1	17.5±0.1	17.5±0.1	12.6±0.1	7.5±0.1	24.0±0.1	4.0±0.1	2.0±0.05	32±0.3	1.75±0.1	14.2±0.1	0.5±0.05	1.5±0.1



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.




SUPERWORLD ELECTRONICS (S) PTE LTD

05.11.2015

9-3. Packaging Quantity

Size	PIC1707HP
Chip / Reel	300
Inner Box	600
Carton	2400

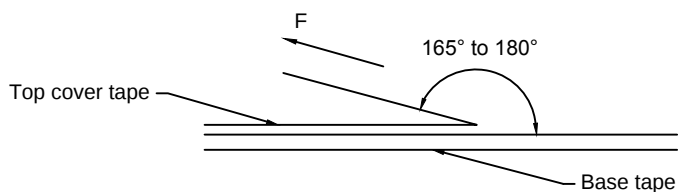9-4. Tearing Off Force

The force for tearing off cover tape is 10 to 130 grams in the arrow direction under the following conditions.
(referenced ANSI/EIA-481-C-2003 of 4.11 standard)

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed (mm/min)
5~35	45~85	860~1060	300

Application Notice**1. Storage Conditions :**

To maintain the solderability of terminal electrodes :

- Recommended products should be used within 12 months from the time of delivery.
- The packaging material should be kept where no chlorine or sulfur exists in the air.

2. Transportation :

- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Vacuum pick up is strongly recommended for individual components.
- Bulk handling should ensure that abrasion and mechanical shock are minimized.

**RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.

