


1. Part No. Expression:

S R X 4 5 3 2 1 7 1 4 0 K S

(a) (b) (c) (d)(e)

- a) Series code
- b) Dimension code
- c) Inductance Code
- d) Tolerance Code
- e) Single Wire Code

2. Configuration & Dimensions : (Unit-mm)

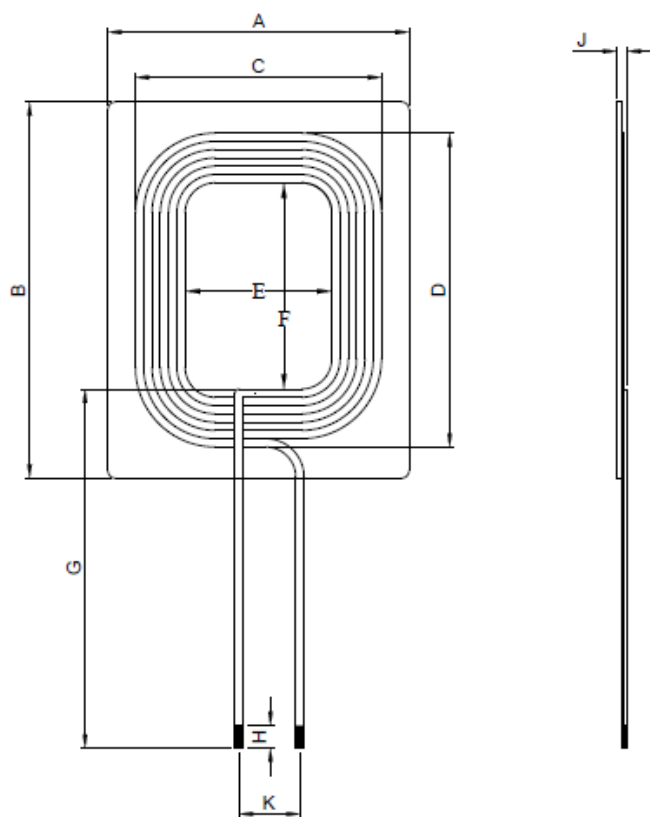

A	B	C	D	E	F	G	H
32.0 Max	45.0 Max	29.0 Ref	36.3 Ref	19.7 Ref	27.5 Ref	35.0±5.0	5.0±1.0
J	K						
1.7 Max	5.0 Ref						

3. Schematic



4. Electrical Characteristics

Inductance (uH)	Test Frequency (Hz)	DCR Max. (mΩ)
14.0±10%	1V/100K	355.0

5. General Specification:

- a) Operating Temp. : -40°C ~ +85°C
- b) Storage Temp. : -40°C ~ +85°C (packaging)