


1. Part No. Expression:

S R X 4 8 3 2 1 5 1 2 0 K B

(a) (b) (c) (d)(e)

- a) Series code d) Tolerance Code
 b) Dimension code e) Bifilar Wire Code
 c) Inductance Code

2. Configuration & Dimensions : (Unit-mm)

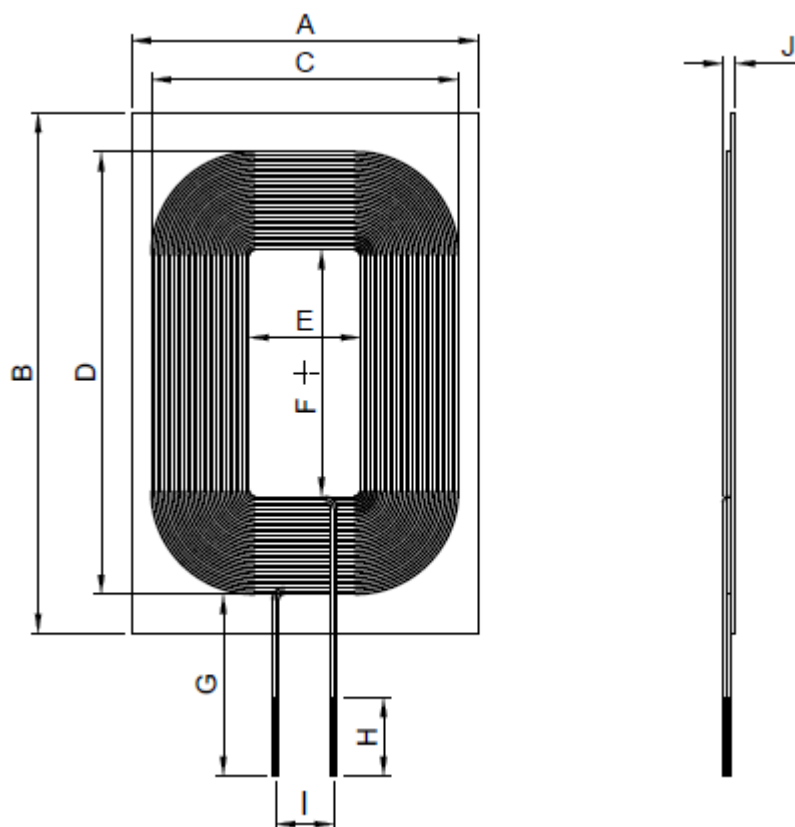

A	B	C	D	E	F	G	H
32.0±0.5	48.0±0.5	31.0 Ref	41.0 Ref	12.0 Ref	21.0 Ref	45.0±5.0	5.0±1.0
I	J						
8.0 Ref	1.5 Max						

3. Schematic



4. Electrical Characteristics

Inductance (uH)	Test Frequency (Hz)	DCR Max. (mΩ)
12.0±10%	1V/100K	200.0

5. General Specification:

- a) Operating Temp. : -40°C ~ +85°C
- b) Storage Temp. : -40°C ~ +85°C (packaging)