

### 1. PART NO. EXPRESSION :

$\frac{S}{(a)} \frac{D}{(b)} \frac{S}{(c)} \frac{2}{(d)} \frac{5}{(e)} \frac{2}{(f)} \frac{0}{(g)} \frac{1}{(h)} \frac{0}{(i)} \frac{D}{(j)} \frac{1}{(k)} \frac{0}{(l)} \frac{0}{(m)} \frac{M}{(n)} \frac{F}{(o)}$

(a) Series code

(b) Dimension code



(c) Material code

(d) Inductance code : 100 = 10.0uH

(e) Tolerance code : M =  $\pm 20\%$

(f) F : RoHS Compliant

### 2. CONFIGURATION & DIMENSIONS :

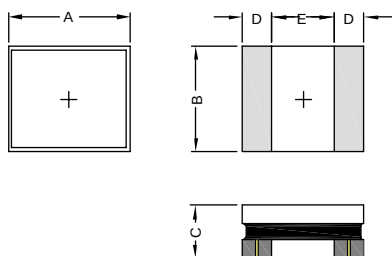


Recommended PCB Pattern

Unit: m/m

| A             | B               | C         | D         | E         | L        | G        | H        |
|---------------|-----------------|-----------|-----------|-----------|----------|----------|----------|
| 2.5 -0.1/+0.2 | 2.0 -0.05/+0.35 | 1.02 Max. | 0.85 Ref. | 0.80 Ref. | 2.9 Ref. | 0.8 Ref. | 2.4 Ref. |

### 3. MATERIALS :



(a) Core : Ferrite Core

(b) Coating : Epoxy with magnetic powder

(c) Termination : Tin Pb Free

(d) Wire : Enameled Copper Wire

Exposed wire tolerance limit of coating resin part on product side.

Size of exposed wire occurring to coating resin is specified below.


1. Width direction (dimension a) : Acceptable when  $a \leq w/2$

Nonconforming when  $a > w/2$

2. Length direction (dimension b) : Dimension b is not specified.

3. The total area of exposed wire occurring to each sides is

not greater than 50% of coating resin area, and is acceptable.



NOTE : Specifications subject to change without notice. Please check our website for latest information.



RoHS Compliant



SUPERWORLD ELECTRONICS (S) PTE LTD

16.01.2014

PG. 1

#### 4. GENERAL SPECIFICATION :

- a) ambient temp. : 25° C
- b) Isat : Based on inductance change ( $\Delta L/L0$  :  $\leq -30\%$ )
- c) Irms : Based on temperature rise ( $\Delta T$  : 40°C) Max
- d) Operating temp. : -55° C to 125° C (for products in unopened tape package, less than 40° C)

#### 5. ELECTRICAL CHARACTERISTICS :

| Part No.        | Inductance<br>( $\mu$ H ) | Test<br>Frequency<br>( Hz ) | DCR<br>( $\Omega$ ) $\pm 20\%$ | Isat<br>(A)<br>Typ. | Irms<br>(A)<br>Typ. |
|-----------------|---------------------------|-----------------------------|--------------------------------|---------------------|---------------------|
| SDS252010D100MF | 10 $\pm 20\%$             | 0.1V/1M                     | 0.47                           | 0.75                | 0.75                |
| SDS252010D220MF | 22 $\pm 20\%$             | 0.1V/1M                     | 1.120                          | 0.50                | 0.50                |



**RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.



16.01.2014



**SUPERWORLD ELECTRONICS (S) PTE LTD**

PG. 2

### 6. CHARACTERISTICS CURVES :

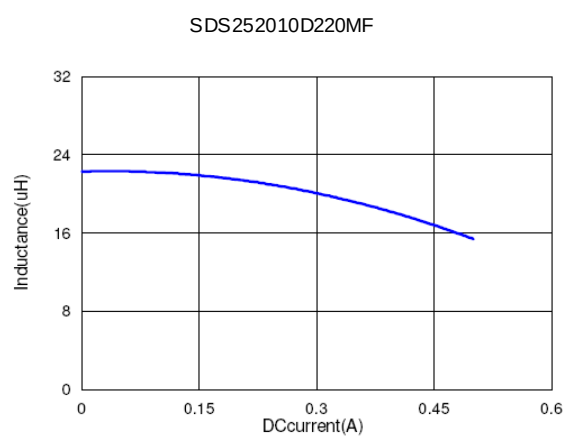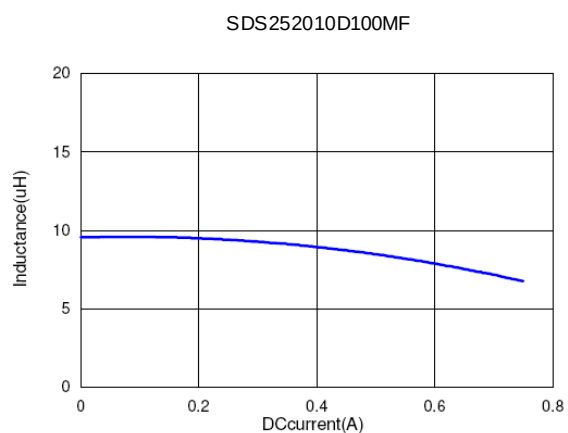

NOTE : Specifications subject to change without notice. Please check our website for latest information.



**RoHS Compliant**

16.01.2014



**SUPERWORLD ELECTRONICS (S) PTE LTD**

PG. 3

### 7. RELIABILITY AND TEST CONDITION :

| ITEM                            | PERFORMANCE                                                                                                                                                                                                        | TEST CONDITION                                                                                                                                                                                                                                                                                                                                                                      |                                |             |                                                    |                             |                              |            |                     |   |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|-------------|----------------------------------------------------|-----------------------------|------------------------------|------------|---------------------|---|
| Electrical Characteristics Test |                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                     |                                |             |                                                    |                             |                              |            |                     |   |
| Inductance L                    | Refer to standard electrical characteristics list                                                                                                                                                                  | Agilent-4291, Agilent-4287                                                                                                                                                                                                                                                                                                                                                          |                                |             |                                                    |                             |                              |            |                     |   |
| Q                               |                                                                                                                                                                                                                    | Agilent-4192, Agilent-4285                                                                                                                                                                                                                                                                                                                                                          |                                |             |                                                    |                             |                              |            |                     |   |
| SRF                             |                                                                                                                                                                                                                    | Agilent-4291                                                                                                                                                                                                                                                                                                                                                                        |                                |             |                                                    |                             |                              |            |                     |   |
| DC Resistance                   |                                                                                                                                                                                                                    | Agilent-4338                                                                                                                                                                                                                                                                                                                                                                        |                                |             |                                                    |                             |                              |            |                     |   |
| Rated Current                   | Base on temp. rise & $\Delta L/L_0 \cong 30\%$ .                                                                                                                                                                   | Saturation DC Current (Isat) will cause L0 to drop approximately $\Delta L(\%)$ .                                                                                                                                                                                                                                                                                                   |                                |             |                                                    |                             |                              |            |                     |   |
| Temperature Rise Test           | $\Delta T$ 40°CMax                                                                                                                                                                                                 | Heat Rated Current (Irms) will cause the coil temperature rise approximately $\Delta T(^{\circ}\text{C})$ without core loss.<br>1.Applied the allowed DC current.<br>2.Temperature measured by digital surface thermometer                                                                                                                                                          |                                |             |                                                    |                             |                              |            |                     |   |
| Mechanical Performance Test     |                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                     |                                |             |                                                    |                             |                              |            |                     |   |
| Solder Heat Resistance          | Appearance : No damage.<br>Inductance : within $\pm$ 10% of initial value<br>Q : Shall not exceed the specification value.<br>RDC : within $\pm$ 15% of initial value and shall not exceed the specification value | <table><tr><td>Temperature<br/>(<math>^{\circ}</math> C)</td><td>Time<br/>(s)</td><td>Temperature<br/>ramp/immersion<br/>and emersion rate</td><td>Number<br/>of heat<br/>cycles</td></tr><tr><td>260<math>\pm</math> 5<br/>(solder temp)</td><td>10<math>\pm</math> 1</td><td>25mm/s<math>\pm</math> 6 mm/s</td><td>1</td></tr></table><br>Depth: completely cover the termination | Temperature<br>( $^{\circ}$ C) | Time<br>(s) | Temperature<br>ramp/immersion<br>and emersion rate | Number<br>of heat<br>cycles | 260 $\pm$ 5<br>(solder temp) | 10 $\pm$ 1 | 25mm/s $\pm$ 6 mm/s | 1 |
| Temperature<br>( $^{\circ}$ C)  | Time<br>(s)                                                                                                                                                                                                        | Temperature<br>ramp/immersion<br>and emersion rate                                                                                                                                                                                                                                                                                                                                  | Number<br>of heat<br>cycles    |             |                                                    |                             |                              |            |                     |   |
| 260 $\pm$ 5<br>(solder temp)    | 10 $\pm$ 1                                                                                                                                                                                                         | 25mm/s $\pm$ 6 mm/s                                                                                                                                                                                                                                                                                                                                                                 | 1                              |             |                                                    |                             |                              |            |                     |   |
| Solderability Test              | More than 95% of terminal electrode should be covered with solder.                                                                                                                                                 | Preheat : 150 $^{\circ}$ C,60sec<br>Solder : Sn99.5%-Cu0. 5%<br>Temperature : 245 $\pm$ 5 $^{\circ}$ C<br>Flux for lead free : Rosin. 9.5%<br>Dip time : 4 $\pm$ 1sec<br>Depth : completely cover the termination                                                                                                                                                                   |                                |             |                                                    |                             |                              |            |                     |   |
| Reliability Test                |                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                     |                                |             |                                                    |                             |                              |            |                     |   |
| Life Test                       | Appearance : No damage.<br>Inductance : within $\pm$ 10% of initial value<br>Q : Shall not exceed the specification value.<br>RDC : within $\pm$ 15% of initial value and shall not exceed the specification value | Preconditioning:Run through IR reflow for 2 times.( IPC/ JEDEC J-STD-020DClassification Reflow Profiles<br>Temperature : 85 $\pm$ 2 $^{\circ}$ C(Inductor)<br>Applied current : rated current<br>Duration : 1000 $\pm$ 12hrs<br>Measured at room temperature after placing for 24 $\pm$ 2 hrs                                                                                       |                                |             |                                                    |                             |                              |            |                     |   |
| Thermal shock                   |                                                                                                                                                                                                                    | Preconditioning:Run through IR reflow for 2 times.( IPC/ JEDEC J-STD-020DClassification Reflow Profiles<br>Step1 : -40 $\pm$ 2 $^{\circ}$ C 30 $\pm$ 5min<br>Step2 : 25 $\pm$ 2 $^{\circ}$ C $\cong$ 0.5min<br>Step3 : 105 $\pm$ 2 $^{\circ}$ C 30 $\pm$ 5min<br>Number of cycles : 500<br>Measured at room femperaturc after placing for 24 $\pm$ 2 hrs                            |                                |             |                                                    |                             |                              |            |                     |   |
| Humidity Resistance Test        |                                                                                                                                                                                                                    | Preconditioning:Run through IR reflow for 2 times.( IPC/ JEDEC J-STD-020DClassification Reflow Profiles<br>Humidity : 85 $\pm$ 2% R.H<br>Temperature : 85 $^{\circ}$ C $\pm$ 2 $^{\circ}$ C<br>Duration : 1000hrs Min. with 100% rated current<br>Measured at room temperature after placing for 24 $\pm$ 2 hrs                                                                     |                                |             |                                                    |                             |                              |            |                     |   |
| Vibration Test                  |                                                                                                                                                                                                                    | Preconditioning:Run through IR reflow for 2 times.( IPC/ JEDEC J-STD-020DClassification Reflow Profiles<br>Oscillation Frequency : 10 $\sim$ 2K $\sim$ 10Hz for 20 minutes<br>Equipment : Vibration checker<br>Total Amplitude : 1.52mm $\pm$ 10%<br>Testing Time : 12 hours(20 minutes, 12 cycles each of 3 orientations)                                                          |                                |             |                                                    |                             |                              |            |                     |   |

NOTE : Specifications subject to change without notice. Please check our website for latest information.

16.01.2014



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 4

### 8. SOLDERING AND MOUNTING :

#### 8-1. Soldering

Mildly activated rosin fluxes are preferred. Our terminations are suitable for all wave and re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

##### 8-1.1 Lead Free Solder Re-flow :

Recommended temperature profiles for re-flow soldering in Figure 1.

##### 8-1.2 Soldering Iron (Figure 2) :

Products attachment with soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended.

Note :

- a) Preheat circuit and products to 150° C.
- b) 355° C tip temperature (max)
- c) Never contact the ceramic with the iron tip
- d) 1.0mm tip diameter (max)
- e) Use a 20 watt soldering iron with tip diameter of 1.0mm
- f) Limit soldering time to 4-5 secs.

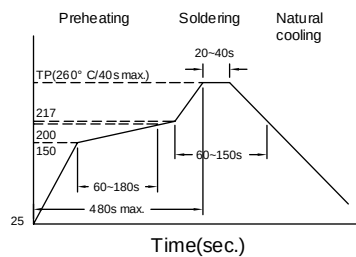


Figure 1. Re-flow Soldering : 3 times max.

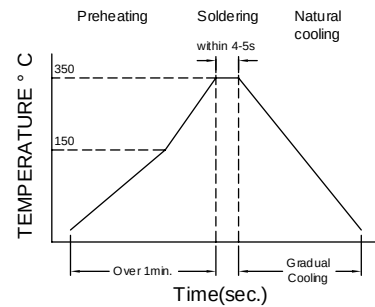


Figure 2. Iron Soldering : 1 times max.



**RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.




**SUPERWORLD ELECTRONICS (S) PTE LTD**

16.01.2014

### 9. PACKAGING INFORMATION :



#### 9-1. Reel Dimension

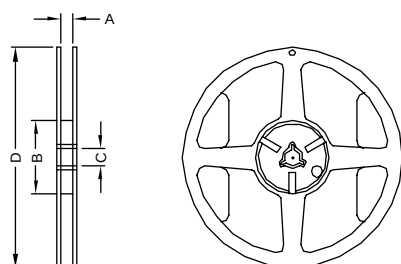

7" x 8mm

| Type     | A(mm)    | B(mm)   | C(mm)   | D(mm)  |
|----------|----------|---------|---------|--------|
| 7" x 8mm | 8.4± 1.0 | 50 Min. | 13± 0.8 | 178± 2 |

#### 9-2 Tape Dimension / 8mm

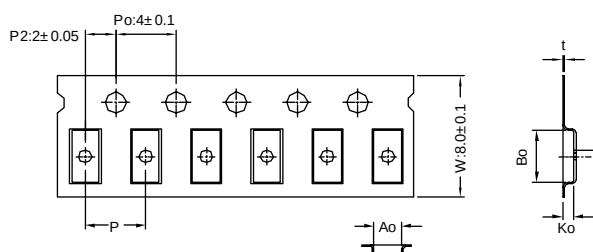

Bottom View

| Series     | Ao(mm)    | Bo(mm)    | Ko(mm)    | P(mm)    | t(mm)      |
|------------|-----------|-----------|-----------|----------|------------|
| SDS252010D | 2.45± 0.1 | 2.85± 0.1 | 1.40± 0.1 | 4.0± 0.1 | 0.23± 0.05 |

#### 9-3. Packaging Quantity

| Size        | SDS252010D |
|-------------|------------|
| Chip / Reel | 2000       |



**RoHS Compliant**


NOTE : Specifications subject to change without notice. Please check our website for latest information.

16.01.2014



**SUPERWORLD ELECTRONICS (S) PTE LTD**

### 9-4. Tearing Off Force

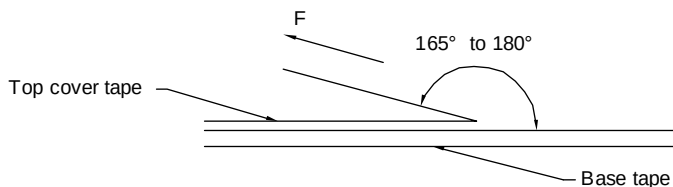

The force for tearing off cover tape is 15 to 80 grams in the arrow direction under the following conditions.

| Room Temp.<br>(° C) | Room Humidity<br>(%) | Room atm<br>(hPa) | Tearing Speed<br>(mm/min) |
|---------------------|----------------------|-------------------|---------------------------|
| 5~35                | 45~85                | 860~1060          | 300                       |

### Application Notice

#### 1. Storage Conditions :

To maintain the solderability of terminal electrodes :

- Temperature and humidity conditions : Less than 40° C and 60% RH.
- Recommended products should be used within 12 months from the time of delivery.
- The packaging material should be kept where no chlorine or sulfur exists in the air.

#### 2. Transportation :

- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- The use of tweezers or vacuum pick up is strongly recommended for individual components.
- Bulk handling should ensure that abrasion and mechanical shock are minimized.



**RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.

16.01.2014



**SUPERWORLD ELECTRONICS (S) PTE LTD**

PG. 7