

Features


- High voltage product
- Wider temperature range
- RoHS compliant
- Electronic tools
- Portable power tools
- UPS and back power supply



Items	Characteristics					
Rated Voltage	3V					
Operating Temperature Range	-40 ~ +65°C (-40 ~ +85°C @ 2.5V)					
Surge Voltage	3.2V					
Capacitance Range	100~400F					
Capacitance Tolerance (25°C)	-10~+30%					
Temperature Characteristics	The specifications shall be met at category temperature range from -40°C to 65°C	<table border="1"> <tr> <td>Capacitance Change</td><td>Within 30% of the initial value at 25°C</td></tr> <tr> <td>ESR</td><td>Less than 2 times of the initial specified value</td></tr> </table>	Capacitance Change	Within 30% of the initial value at 25°C	ESR	Less than 2 times of the initial specified value
Capacitance Change	Within 30% of the initial value at 25°C					
ESR	Less than 2 times of the initial specified value					
High Temperature Loaded	The specifications shall be met after rated voltage applied at 65°C for 1500 hours					
High Temperature Storage	The specifications shall be met after storage at 65°C for 1000 hours	<table border="1"> <tr> <td>Capacitance Change</td><td>Within 30% of the initial value</td></tr> <tr> <td>ESR</td><td>Less than 2 times of the initial specified value</td></tr> </table>	Capacitance Change	Within 30% of the initial value	ESR	Less than 2 times of the initial specified value
Capacitance Change	Within 30% of the initial value					
ESR	Less than 2 times of the initial specified value					
Cycle Life	The specifications shall be met after 500,000 cycles at 25°C, cycle of charge/discharge from V_R to $1/2V_R$	<table border="1"> <tr> <td>Capacitance Change</td><td>Within 30% of the initial value</td></tr> <tr> <td>ESR</td><td>Less than 2 times of the initial specified value</td></tr> </table>	Capacitance Change	Within 30% of the initial value	ESR	Less than 2 times of the initial specified value
Capacitance Change	Within 30% of the initial value					
ESR	Less than 2 times of the initial specified value					

Dimensions

mm

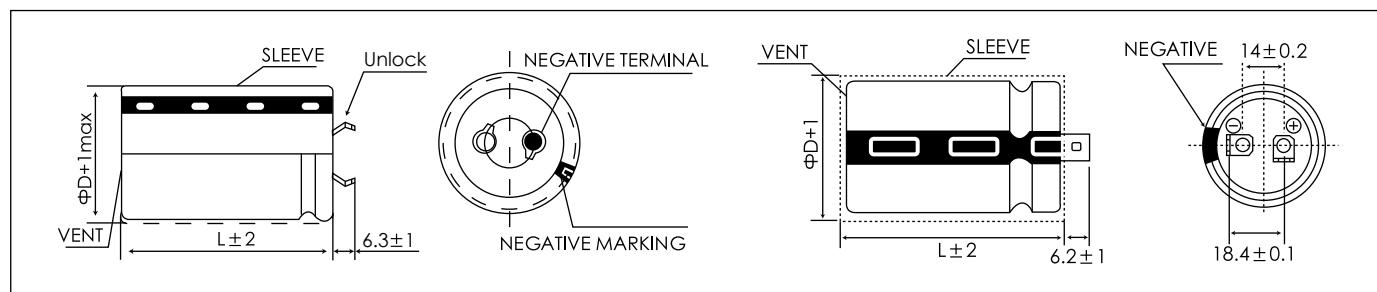

Standard Ratings for SSE Series

U _R (Surge Voltage) Code	Rated Capacitance 25°C	Impedance		Leakage Current (72hrs)	Size ΦD×L	Weight	P/N
		ESR _{DC}	ESR _{AC} 1KHz				
(V)	(F)	(mΩ)	(mΩ)	(mA)	(mm)	(g)	-
3 (3.2) 3R0	100	12	8	0.3	22×45	20	SCCDES3R0107QSA220045E
	200	10	6	0.7	30×50	36	SCCDES3R0207QSA300050E
	350	3.5	3	1.0	35×60	64	SCCDES3R0357QLS350060E
	400	3.2	2.8	1.0	35×60	70	SCCDES3R0407QLS350060E