



Lithium Cylindrical Cell - CR 2

- Low self-discharge
- Long shelf life
- UN 38.3 tested
- Wide assortment of mounting options and wire terminals available



RoHS compliant



Pb free



REACH compliant




Conflict mineral free

SPECIFICATIONS

Jauch part number	245718
Nominal Voltage	3V
Nominal Capacity	850 mAh
Cut-Off Voltage	2V
Continuous Standard Load	10 mA
Max. Continuous Current	800 mA
Max. Pulse Current	1500 mA
Operating Temperature	-40°C to +70°C *
Weight	Approx. 11.0 g
Chemistry	Li/MnO ₂


Note: Capacity 850mAh is obtained at standard cc load to 2.0V at 23°C.

DIMENSIONS [mm]

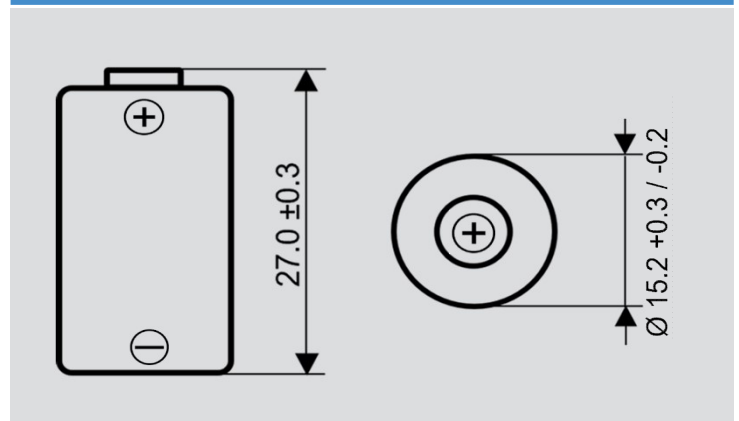


* In applications where the battery is exposed to temperatures >60°C, please contact Jauch.


DISCHARGE CHARACTERISTICS

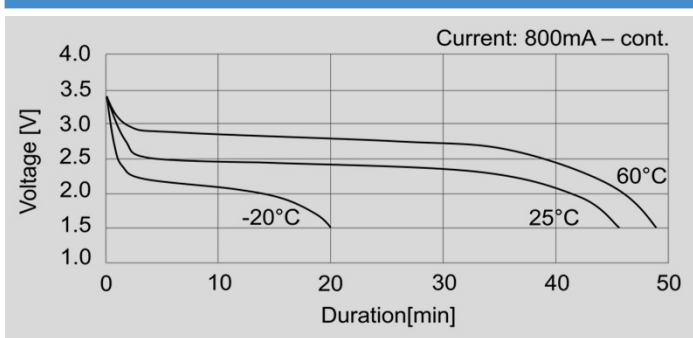

DISCHARGE CHARACTERISTICS

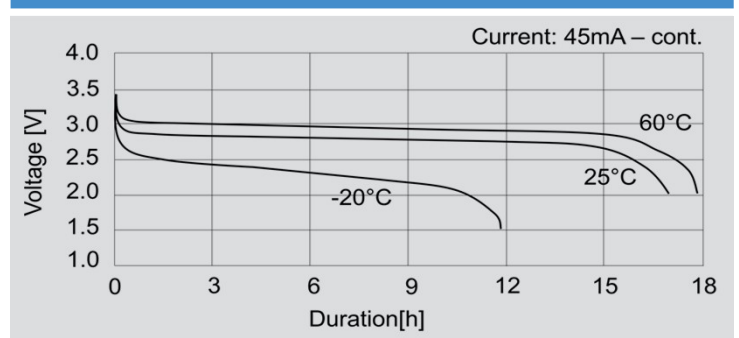

PULSE DISCHARGE CHARACTERISTICS

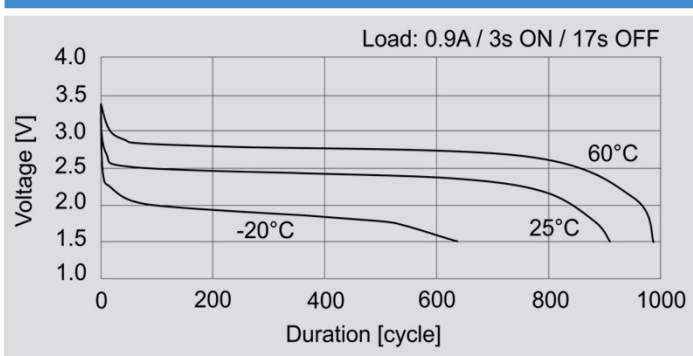

DISCHARGE CHARACTERISTICS

