

Lithium Primary - CR 2/3A 2PT

- Reliable energy for your application
- Standard cells and customized packs
- ESD protection
- UL recognized
- Battery Certification Experts



RoHS compliant Pb free



REACH compliant



Conflict mineral free

Technical Data Sheet · CR 2/3 A 2PT


SPECIFICATIONS

Nominal Voltage	3V
Jauch part number	251526
Nominal Capacity	1600 mAh*
Continuous Standard Load	5 mA
Max. Continuous Discharge	700 mA
Max. Pulse Current	2000 mA
Operating Temperature	-40 °C to +85 °C**
Weight	Approx. 17.0g
Chemistry	Li/MnO ₂
UI1642	MH62838


*Constant discharge 5 mA to 2V

**Please contact Jauch for use below and above -10°C to +40°C


DIMENSIONS (mm)

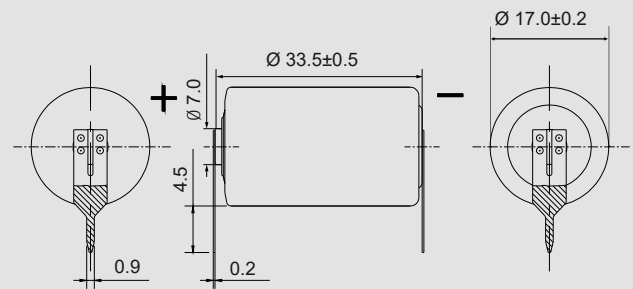


TEMPERATURE CHARACTERISTICS

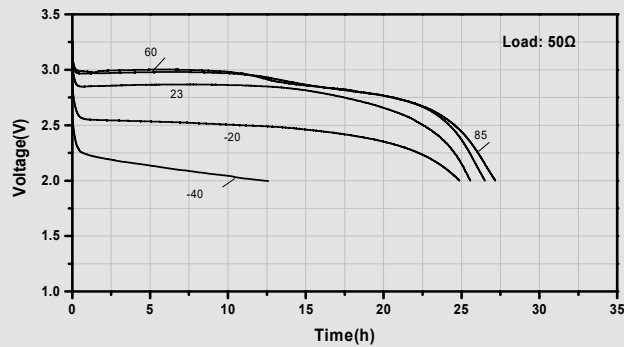


TEMPERATURE CHARACTERISTICS

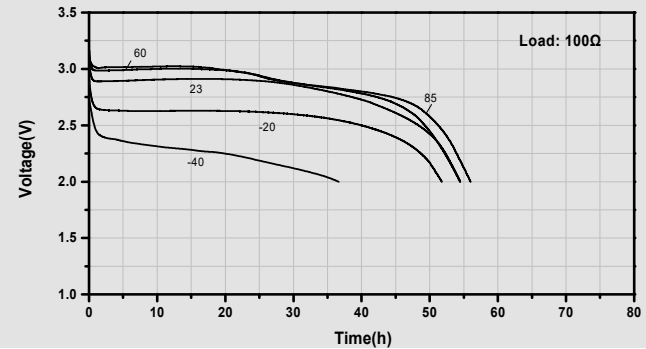

TEMPERATURE CHARACTERISTICS

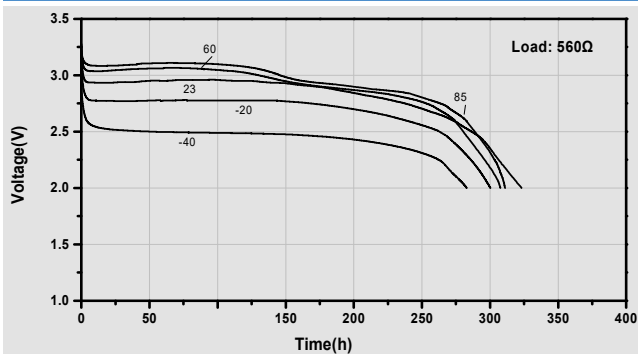

CAPACITY vs. CCV vs. IR CHARACTERISTICS(23°C)

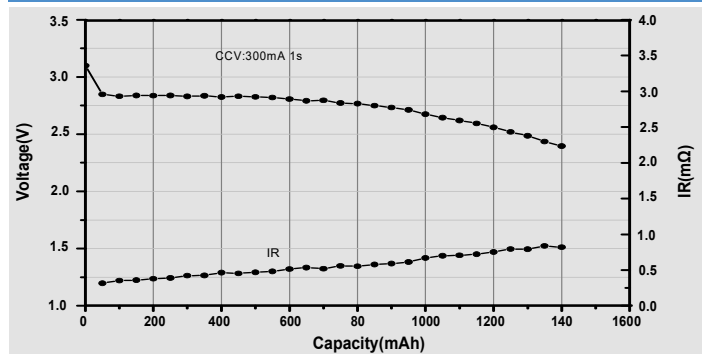

Wide assortment of mounting options, including through hole, surface mount and wire terminals. Contact Jauch for more information
batterytechnology@jauch.com