



actual size

# Automotive SMD Crystal · JXS11P4

- 4 Pad Version, 1.6 x 1.2 mm
- seam sealed ceramic / metal package
- all versions are AEC-Q200 qualified
- HMR version with extended shock & vibration immunity



RoHS compliant



Pb free



REACH compliant



Conflict mineral free

## GENERAL DATA

TYPE	JXS11P4
frequency range	24.0 ~ 60.0 MHz (fund. AT-cut)
frequency tolerance at 25 °C	± 10 ppm / ± 20 ppm / ± 30 ppm
load capacitance $C_L$	8 pF standard (option: 6 pF ~ 12 pF / series)
shunt capacitance $C_0$	< 3 pF
storage temperature	-40 °C ~ +125 °C
drive level max.	100 µW (10 µW recommended)
shock resistance	> 100 g (half sine pulse, 6.0 ms)*
aging	< ± 3 ppm first year (option: < ± 1 ppm first year for tol. ± 10 ppm)

\* optional HMR version: 3000G / half sine pulse / 0.3 ms

## TABLE 1: FREQUENCY STABILITY VS. TEMPERATURE

		± 15 ppm	± 20 ppm	± 25 ppm	± 30 ppm	± 50 ppm	± 100 ppm
-40 °C ~ + 85 °C	T1	△	○	○	○	○	○
-40 °C ~ +105 °C	T2			△	○	○	○
-40 °C ~ +125 °C	T3					△	○

○ available △ ask if available

## DIMENSIONS

top view

side view

bottom view

crystal connection

pad layout

in mm


## ORDER INFORMATION

Q	frequency	type	load capacitance	tolerance at 25 °C	stability vs. temp. range	option 1	option 2
Quartz	24.0 ~ 60.0 MHz	JXS11P4	8 pF standard 6 pF ~ 12 pF available S for series	10 = ± 10 ppm 20 = ± 20 ppm 30 = ± 30 ppm	see table 1	T1 = -40 °C ~ + 85 °C T2 = -40 °C ~ +105 °C T3 = -40 °C ~ +125 °C	AEC = AEC-Q200 qualified HMR = high mechanical reliability (3000g/half sine wave/0.3ms) FU = for fundamental frequencies ≥ 20 MHz


**Example: Q 32.0-JXS11P4-8-30/50-T2-FU-AEC-LF** (Suffix LF = RoHS compliant / Pb free)

# Automotive SMD Crystal · JXS11P4

## TAPING SPECIFICATION

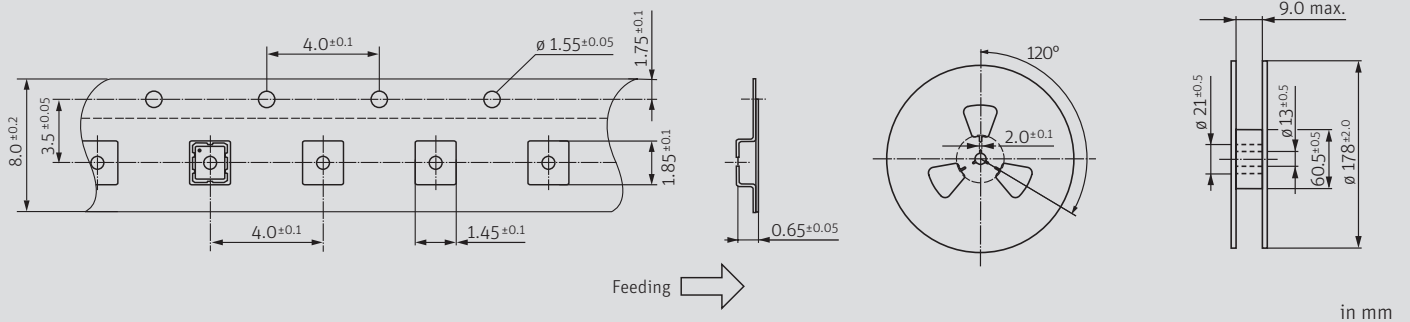

## REFLOW SOLDERING PROFILE

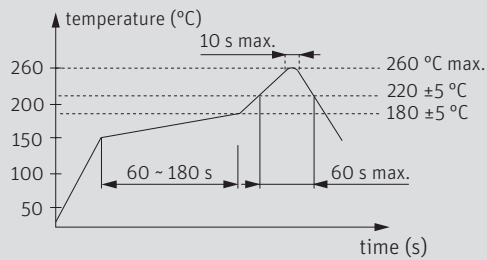

note: parts are also suitable for soldering systems with lead (Pb) content

## LOAD CAPACITANCE CODES

6 pF: q	12 pF: a	18 pF: f	27 pF: w
7 pF: m	13 pF: v	20 pF: c	30 pF: .
8 pF: k	14 pF: x	22 pF: g	series: s
9 pF: n	15 pF: j	24 pF: d	T: 3rd OT
10 pF: h	16 pF: b	25 pF: r	
11 pF: l	17 pF: t		

example 30.0 MHz / 8 pF: 30k0