



Lithium Coin Cell - CR2050JHT

- Reliable energy for your application
- Standard cells and customized packs
- ESD protection
- UL recognized
- Battery Certification Experts



RoHS compliant



Pb free



REACH
compliant



Conflict
mineral free


Technical Data Sheet · CR2050JHT

SPECIFICATIONS


Nominal Voltage	3V
Jauch part number	252296
Nominal Capacity	350 mAh
Standard Load	15 kΩ
Standard Current	0.4 mA
Max. Pulse Current	7.5 mA
Operating Temperature	- 40°C to + 125°C*
Weight	Approx. 4.5 gr.
Chemistry	Li/MnO ₂
UL1642	MH62838

* In applications where the battery is exposed to temperatures >100°C, please contact Jauch.


DIMENSION

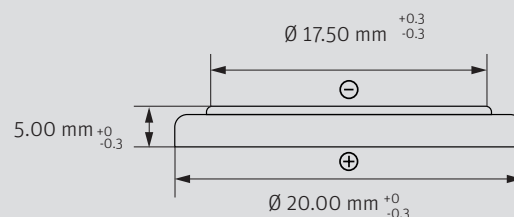


DISCHARGE CHARACTERISTICS

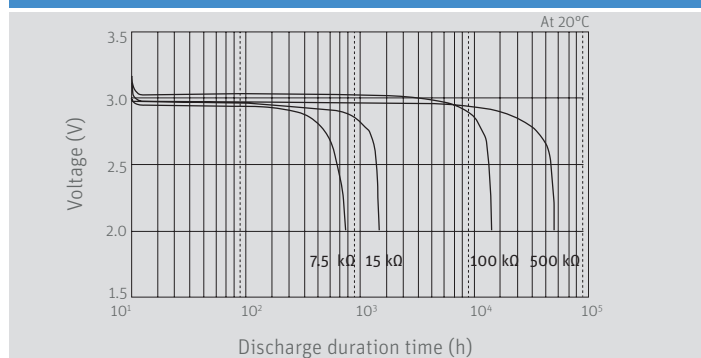


TEMPERATURE CHARACTERISTICS

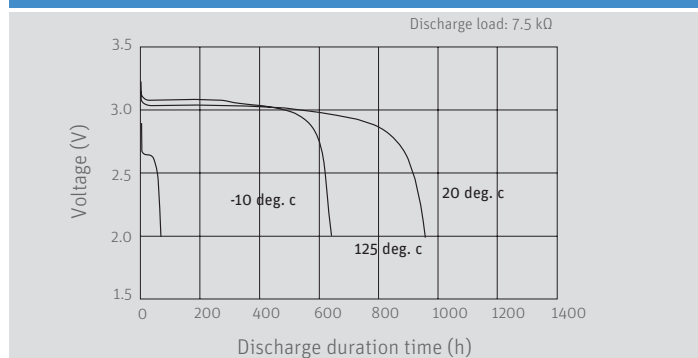

INTERNAL RESISTANCE/TEMPERATURE

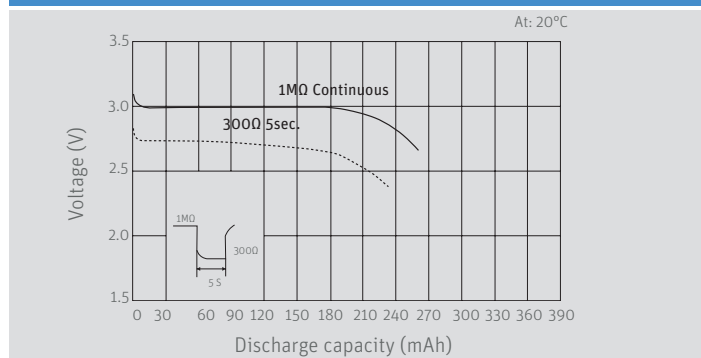

LOAD VS. CAPACITY

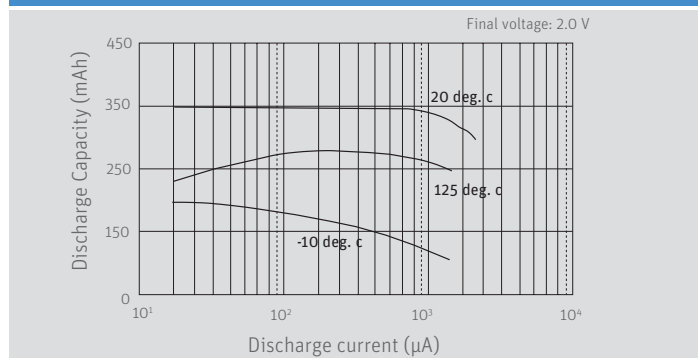

Wide assortment of mounting options, including through hole, surface mount and wire terminals.
Contact Jauch for more information.