



# Lithium Coin Cell - CR2450JHT

- Designed for High Temperature Environment
- Especially for automotive devices such as TPMS or ETC
- Low self-discharge
- Long shelf life
- UN 38.3 tested
- Wide assortment of mounting options and wire terminals available



RoHS compliant



Pb free



REACH  
compliant




Conflict  
mineral free

## SPECIFICATIONS


Jauch part number	251846
Nominal Voltage	3V
Nominal Capacity	550 mAh
Continuous Standard Load	7.5 kΩ
Standard Current	0.4 mA
Max. Pulse Current	25 mA
Operating Temperature	-40°C to +125°C
Weight	Approx. 6.9 g
Chemistry	Li/MnO <sub>2</sub>

Note: Capacity 550mAh is obtained at standard cc load to 2.0V at 23°C.


## DIMENSIONS [mm]

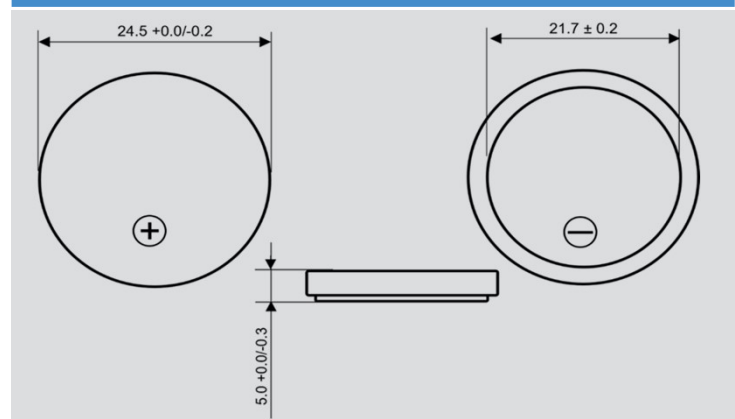


## DISCHARGE CHARACTERISTICS

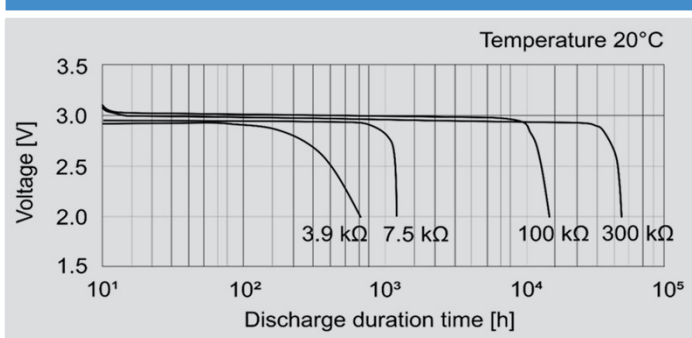

## DISCHARGE CHARACTERISTICS

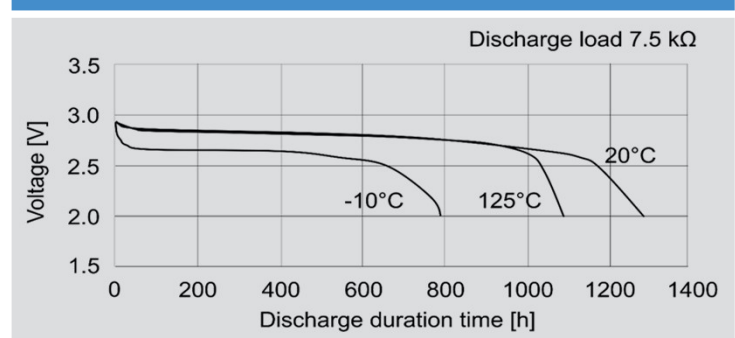

## PULSE DISCHARGE CHARACTERISTICS

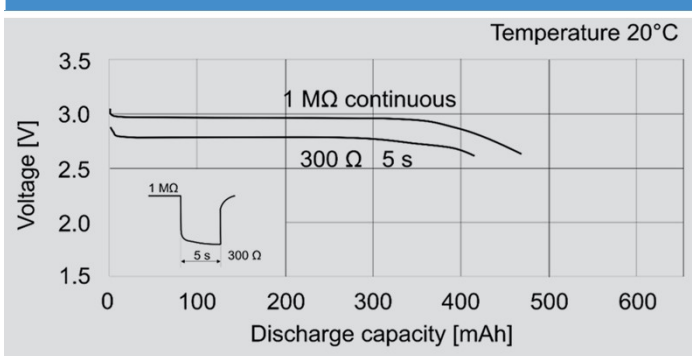

## DISCHARGE CHARACTERISTICS

