

Lithium Coin Cell - CR 2032 H2B

- Low self-discharge
- Long shelf life
- UN 38.3 tested
- Wide assortment of mounting options and wire terminal available

RoHS compliant · Pb free · REACH compliant · Conflict mineral free

Technical Data Sheet · CR 2032 H2B

SPECIFICATIONS

Nominal Voltage	3V
Jauch part number	247643
Nominal Capacity	240 mAh
Standard Load	15 kΩ
Standard Curent	0.2 mA
Max. Continuous Current	3 mA
Max. Pulse Current	15 mA
Operating Temperature	- 30°C to + 85°C*
Weight	Approx. 2.9 gr.
Chemistry	Li/MnO_2
UL1642	MH62838

*In applications where the battery is exposed to temperatures >60°C, please contact Jauch

DIMENSION

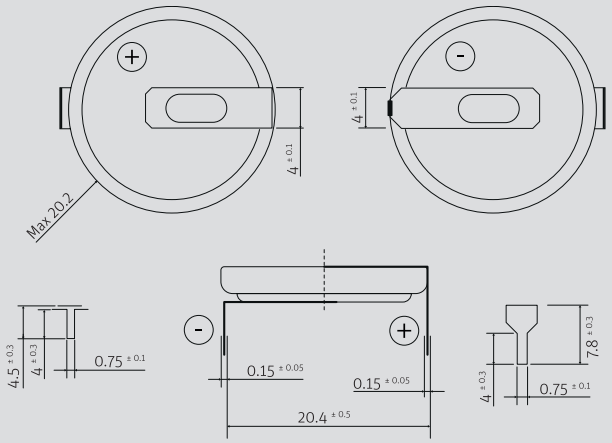

DISCHARGE CHARACTERISTICS

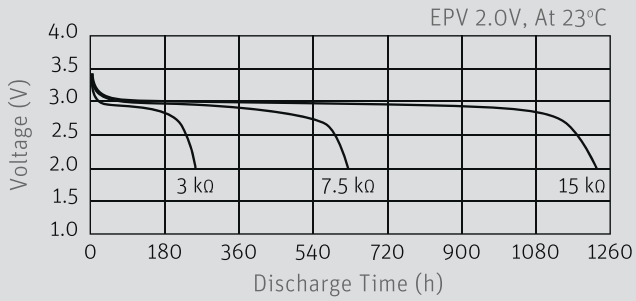

TEMPERATURE CHARACTERISTICS

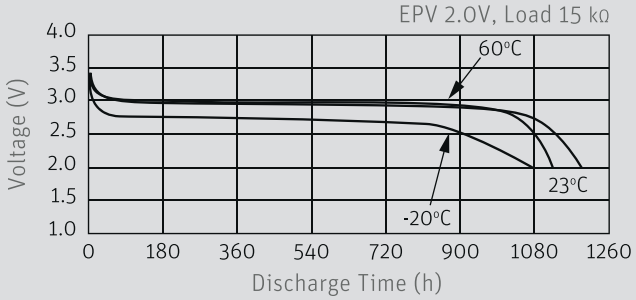

DISCHARGE CHARACTERISTICS

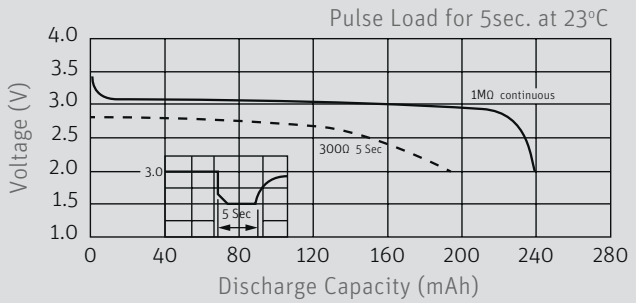

LOAD VS. CAPACITY

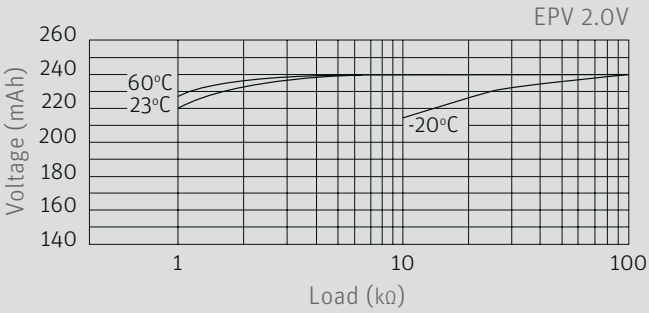

©JQG 2025

15092025

Jauch Quartz GmbH • e-mail: batterytechnology@jauch.com
www.jauch.com

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact JAUCH for the latest informatoion.