



actual size

SMD Quartz Crystal · JXS11-WA

- for wireless applications, dimension 1.6 x 1.2 mm
- perfect reference crystal for wireless applications
- for IoT using BlueTooth, ZigBee, NFC and more
- high frequency stability and low ESR
- metal lid allows EMI shielding



RoHS compliant



Pb free



REACH
compliant



Conflict
mineral free

GENERAL DATA

TYPE	JXS11-WA
special frequencies for wireless applications	13 standard frequencies shown in ESR list (for other frequencies refer to general JXS11 datasheet)
frequency tolerance at 25 °C	±10 ppm*
load capacitance C_L	6 pF / 7 pF / 8 pF / 9 pF / 10 pF / 12 pF*
shunt capacitance C_0	< 3 pF
storage temperature	-40 °C ~ +105 °C
drive level max.	100 µW (10 µW recommended)
aging	< ± 2 ppm first year

* for different specs please ask for availability

TABLE 1: FREQUENCY STABILITY CODE

		± 10 ppm	±13 ppm	±15 ppm	±20 ppm	±25 ppm	±30 ppm
-20 °C ~ +70 °C	STD.	●		○	○	○	○
-30 °C ~ +85 °C	T(-30/+85)		△	○	○	○	○
-40 °C ~ +85 °C	T1			△	●	○	○
-40 °C ~ +105 °C	T2					△	●


● standard ○ available △ ask if available

ESR (SERIES RESISTANCE RS)

frequency in MHz	vibration mode	ESR max. in Ω	ESR typ. in Ω
24.0	fund. - AT	80	60
25.0	fund. - AT	80	60
26.0	fund. - AT	80	50
27.120	fund. - AT	80	50
32.0	fund. - AT	60	40
38.40	fund. - AT	60	40
40.0	fund. - AT	60	35
48.0	fund. - AT	60	30
52.0	fund. - AT	60	40
60.0 Δ	fund. - AT	(60)	(40)
64.0 Δ	fund. - AT	(60)	(40)
76.80 Δ	fund. - AT	60	40
80.0 Δ	fund. - AT	60	40

Δ ask if available, ESR in () is preliminary information

DIMENSIONS

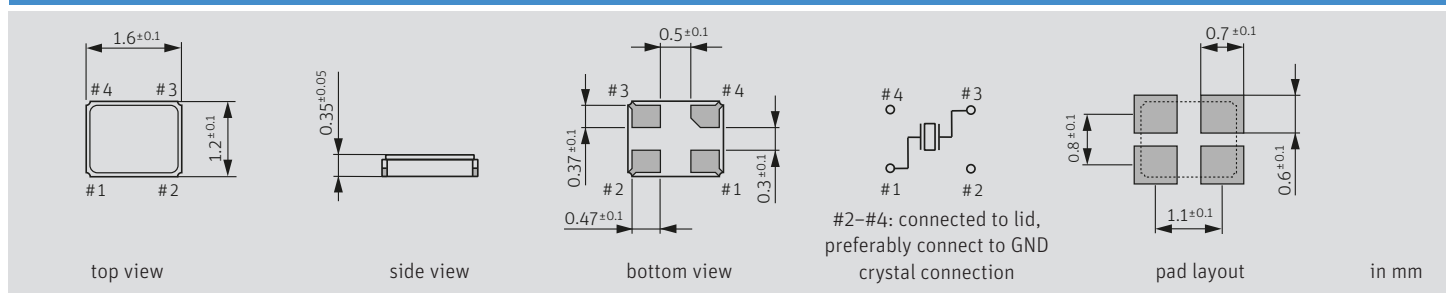


ORDER INFORMATION

Q	frequency	type	load capacitance	tolerance at 25 °C	stability vs. temp. range	option 1	option 2
Quartz	see frequencies in ESR list	JXS11	6 / 7 / 8 / 9 / 10 / 12 pF	10 = ±10 ppm std.	10 = ±10 ppm 13 = ±13 ppm 15 = ±15 ppm 20 = ±20 ppm 25 = ±25 ppm 30 = ±30 ppm	blank = -20 °C ~ +70 °C T(-30/+85) = -30 °C ~ +85 °C T1 = -40 °C ~ +85 °C T2 = -40 °C ~ +105 °C FU = for fundamental frequencies ≥ 20 MHz	WA = for wireless application


Example: Q 26.0-JXS11-8-10/15-T1-FU-WA-LF (Suffix LF = RoHS compliant / Pb free pins or pads)

SMD Quartz Crystal · JXS11-WA

TAPING SPECIFICATION

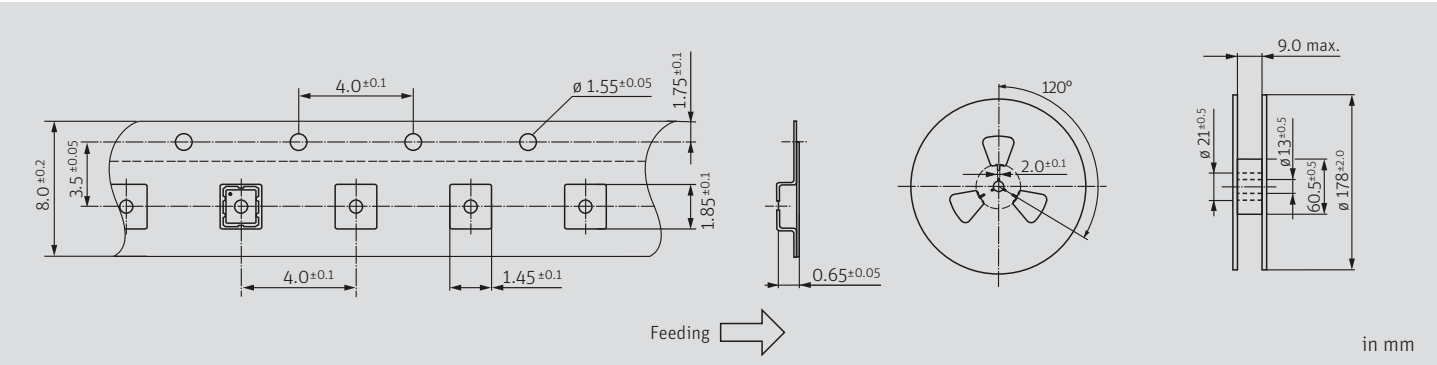

REFLOW SOLDERING PROFILE

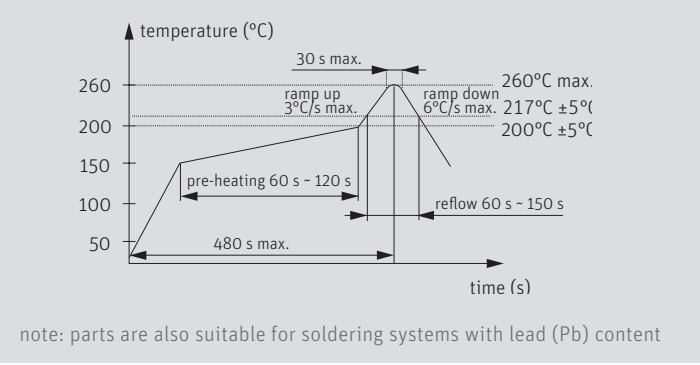

LOAD CAPACITANCE CODES

- 4 pF: B
 - 5 pF: F
 - 6 pF: q
 - 7 pF: m
 - 8 pF: k
 - 9 pF: n
 - 10 pF: h
 - 12 pF: a
 - series: S
- example 26.0 MHz / 8 pF: 26k00

* hand soldering temperature should not exceed 280 °C

MARKING

frequency with load capacitance code					
company code / date code / internal code					
date code: A ~ M: Jan. - Dec.					
5: 2025	6: 2026	7: 2027	8: 2028	9: 2029	0: 2030
Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M