

BATTERY TECHNOLOGY



- › Batteries
- › Customized battery packs
- › Manufacturing and production
in Germany and Asia
- › Implementation of all relevant certifications

COMPLETE SOLUTIONS FOR YOUR BATTERY SYSTEM



Jauch has been producing battery power supplies for mobile applications since 1976. At the company's headquarters in Villingen-Schwenningen, Germany experienced battery specialists design and develop configurations for the most diverse applications.



Jauch can offer complete battery solutions for your system according to your technical requirements – from standard batteries using single cells to multi-cell, customized packs with intelligent microprocessor control for the most sophisticated applications. We can take your unique design requests into consideration and include all relevant safety features.

If you are looking for customized battery packs, you should contact us. Our specialists, with their development and production know-how based on decades of experience, will be able to provide you with optimum solutions to allow your product to reach you punctually, safely and in accordance with the latest legislations.


Sustainability

EcoVadis conducts sustainability ratings worldwide in accordance with international sustainability standards. In January 2025, the Jauch Group received the EcoVadis silver medal for its sustainability performance. This globally recognized rating evaluates companies in four key areas: environment, labor and human rights, ethics, and sustainable procurement. Jauch achieved this recognition on its first participation, placing it in the top 15% of all participating companies. This confirms our commitment to a responsible and sustainable future.





CUSTOMIZED BATTERY PACK DESIGN

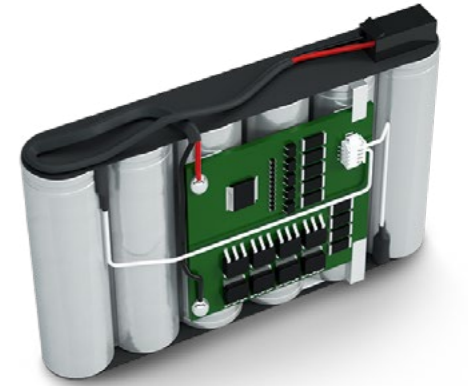


Jauch develops and manufactures the complete battery pack, including customized housing.

We develop your individual battery solution: from the choice of the cell with the suitable active material and the safety electronics, to the assembly of the battery pack with optional housing. To ensure the battery operates safely in your application, we support this development with our modern test equipment.

In doing so, we meet the highest quality and safety standards. Based on our international project experience in a wide variety of industries, we leverage considerable expertise in terms of which tests and certification procedures must be complied with for the transport and distribution of your battery-powered products.



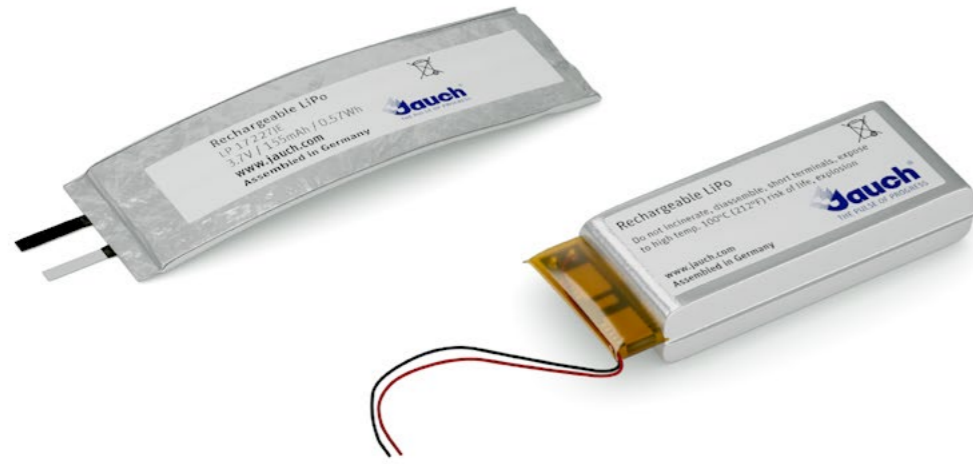

YOUR SOURCE FOR LITHIUM POLYMER BATTERIES

As a leading manufacturer of battery solutions, Jauch provides lithium polymer products with particularly high quality and performance for customers around the world.



Lithium polymer batteries offer several advantages: Lithium polymer cells have higher energy density relative to their total weight than do lithium ion cells. Lithium polymer cells use aluminum-laminated films as a housing, resulting in a lighter and thinner battery. Lithium polymer batteries are highly flexible in cell size and shape. Many smart phones and GPS devices use

lithium polymer batteries. We manufacture customized battery packs for all branches of industry. Leveraging our knowledge and our wealth of experience means we can offer many different solutions in the field of lithium polymer batteries in a short time.

The space for the installation of the power supply is often limited and is already clear long before you initially contact the battery assembler. Our wide range of lithium polymer batteries allows you to select the battery that best suits your application, even at a later stage in the project.

- › Available ex warehouse
- › Cell selection
- › Sample production in Villingen-Schwenningen, Germany in the shortest time
- › Customized battery protection circuits
- › Perfect quality, performance and safety
- › Experience with battery chemistry
- › Worldwide technical support

We are happy to assist you from the outset in selecting the optimum battery solution. You can help us by letting us know important advance information regarding your request:

PROJECT REQUIREMENTS

- › Application
- › Voltage (V)
- › Capacity (mAh)
- › Discharge current (mA)
- › Dimensions LxWxH (mm)
- › Quantity

GET THE RELEVANT CERTIFICATIONS EVEN FASTER BY OUR OWN TEST AND CERTIFICATION CENTRE



Anyone who deals with approval issues, perhaps even worldwide, knows that the challenges are becoming ever more extensive and complex.

We have expanded our existing test laboratory to include a new test and certification centre so that we can act faster and provide the best possible support for our customers. We can now test cells and batteries in-house and issue test certificates either ourselves or in collaboration with accredited test laboratories, such as the CB report in accordance with IEC62133-2:2017.



Our knowledge of regulatory requirements enables us to ensure that our batteries meet the necessary requirements and that the tests are carried out quickly and completed successfully in accordance with our customers' requirements.

Cordless, portable and mobile devices are increasingly in demand by the market. The performance of modern batteries makes this possible and creates unimagined freedom in the design and application of battery-powered devices. In addition to performance, the safety of battery-powered devices and, above all, the battery, is crucial to the success of these products. The regulatory authorities are aware of the

potential dangers and have created standards to test for and rule out any potential hazards. The transport test according to UN 38.3, for which the United Nations issues its recommendations, is the basis to which all relevant countries worldwide adhere for transportation. We carry out all individual tests in accordance with UN 38.3 ourselves and issue the corresponding test certificates.

THOROUGHLY TESTED – ALSO ACCORDING TO YOUR CRITERIA

At your request, we demand that our batteries comply strictly with the regulations of the IEC62133 or UN38.3 certification standards, or we can work with even stricter standards that you specify: Our laboratory tests and documents for you exactly what our batteries can withstand.




Crush test




Free fall test



Mechanical Shock test



Thermal shock / abuse test

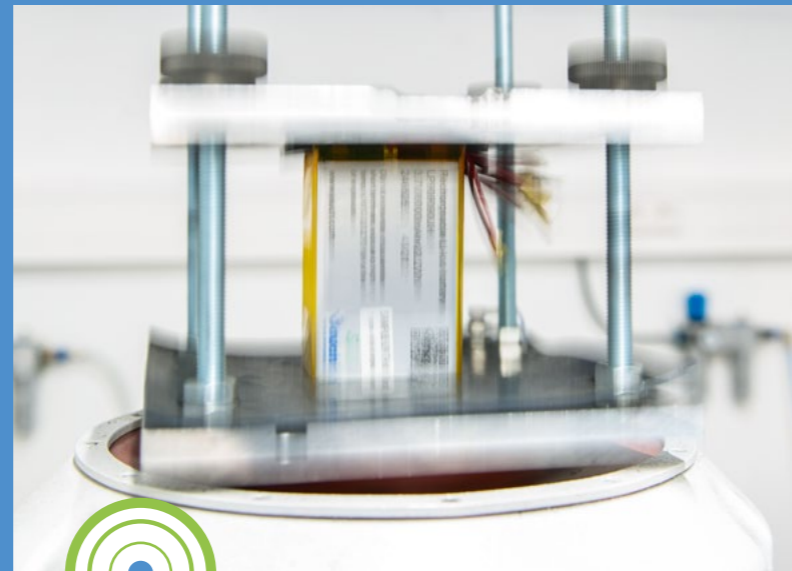

Vibration test



External short circuit test



Overcharging test

What we test for certification according to IEC62133



- › Continuous charge at constant voltage
- › Case stress at high ambient temperature
- › External short circuit
- › Free fall
- › Thermal abuse
- › Crush
- › Overcharging of battery
- › Vibration
- › Mechanical shock


What we test for certification according to UN38.3



- › Altitude test
- › Thermal cycling
- › Vibration
- › Shock
- › External short circuit
- › Impact/ Crush
- › Overcharge
- › Forced Discharge

SAFETY IN SERIES

Jauch is certified to DIN EN ISO 9001:2015. Our batteries and battery packs conform to the highest international production and quality standards and pass through a series of specific tests for which we use only the very highest quality test systems. We have access to production starting from cell development. This significantly contributes to our “Made in Germany” Jauch quality.

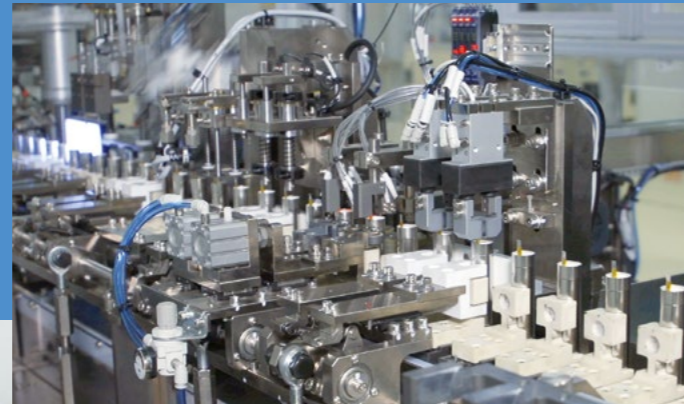

The Jauch production plant in Villingen-Schwenningen, Germany conforms to the very latest international standards. In modern, ESD-protected rooms, high-performance batteries are produced— for use in the automotive industry, pedelecs and e-bikes, mobile phones, cameras, gardening equipment, home appliances, and many others. From prototypes and one-offs to the production of small and medium series, you get quality “Made in Germany”. At production sites in Asia, we manufacture battery packs in medium to high volume.









To ensure our quality, we use only high-quality test systems. Based on its battery technology experience, Jauch has developed special test environments that can simulate even extreme operating or environmental conditions. In doing so, Jauch engineers rely on the wealth of experience in electronics that we have gained in the frequency control components division since 1954.

- › Modern test environment
- › ESD equipment
- › Long- and short-term cycling for determining performance of systems up to 50.1V (100A)
- › Thermal shock, vibration, drop tests...
- › Charging and discharging tests
- › Simulations of predefined test scenarios according to customer specifications

NON RECHARGEABLE BATTERIES



CYLINDRICAL LITHIUM BATTERIES

	MODEL	VOLTAGE (V)	CAPACITY (mAh)	MAX. CONTINUOUS CURRENT (mA)	DIAMETER (mm)	LENGTH (mm)
STANDRAD TYPE						
	CR2	3.00	850	800	27.00	15.20
	CR123A	3.00	1600	1500	17.00	34.50
	CR14250 1/2AA	3.00	850	800	14.50	25.00
	CR17335 2/3A	3.00	1600	1000	17.00	33.50
	CR2/3AL	3.00	1600	1000	17.00	34.50
	CR14505 AA	3.00	1600	1000	14.30	49.45
	CR17450 AG	3.00	2500	1000	17.00	45.00
	CR17505 A	3.00	2800	1000	17.00	51.50

EXTENDED LIFESPAN

	CR123AH	3.00	1800	1000	17.00	34.50
	CR17335AH 2/3A	3.00	1600	700	17.00	33.50
	CR17450AH AG	3.00	2600	1000	17.00	45.00

ENERGY TYPE

	CR2E	3.00	1000	1000	15.60	26.50
	CR123AE	3.00	1500	1000	17.00	34.50
	CR17450E AG	3.00	2400	1000	17.00	45.00

NON RECHARGEABLE BATTERIES



CYLINDRICAL LITHIUM BATTERIES

	MODEL	VOLTAGE (V)	CAPACITY (mAh)	WIDTH (mm)	Height (mm)	LENGTH (mm)
BATTERY						
	CR P2	6.00	1600	19.50	36.00	35.00
	2CR5	6.00	1600	17.00	45.00	34.00
	CR 9V	9.00	1200	17.00	48.50	26.50



NON RECHARGEABLE BATTERIES



TABBED LITHIUM COIN CELLS

	MODEL	VOLTAGE (V)	CAPACITY (mAh)	DIAMETER (mm)	HEIGHT (mm)	TAB VARIATION
	CR1025 V2	3.00	30	10.00	2.50	2 pins vertical / through hole mounting
	CR1220 V2	3.00	40	12.50	2.00	2 pins vertical / through hole mounting
	CR1225 H2	3.00	48	12.50	2.50	2 pins horizontal/ through hole mounting
	CR1632 H2	3.00	135	16.00	3.20	2 pins horizontal/ through hole mounting
	CR1632 H2B	3.00	135	16.00	3.20	2 pins horizontal/ through hole mounting
	CR2032 H2	3.00	240	20.00	3.20	2 pins horizontal/ through hole mounting
	CR2032 H2B	3.00	240	20.00	3.20	2 pins horizontal/ through hole mounting
	CR2032 H3	3.00	240	20.00	3.20	3 pins horizontal/ through hole mounting
	CR2032 H3B	3.00	240	20.00	3.20	3 pins horizontal/ through hole mounting
	CR2032 V2	3.00	240	20.00	3.20	2 pins vertical / through hole mounting
	CR2032 V3	3.00	240	20.00	3.20	3 pins vertical / through hole mounting
	CR2450 H3	3.00	610	24.50	5.00	3 pins horizontal/ through hole mounting
	CR2450 H3B	3.00	610	24.50	5.00	3 pins horizontal/ through hole mounting
	CR2450 V3	3.00	610	24.50	5.00	3 pins vertical / through hole mounting
	CR2477 H2B	3.00	1.000	24.50	7.70	2 pins horizontal/ through hole mounting
	CR2477 V3	3.00	1.000	24.50	7.70	3 pins vertical / through hole mounting

NON RECHARGEABLE BATTERIES



TABBED LITHIUM COIN CELLS

	MODEL	VOLTAGE (V)	CAPACITY (mAh)	DIAMETER (mm)	HEIGHT (mm)	TAB VARIATION
	CR1216SM	3.00	30	12.00	1.60	Surface Mounting
	CR1220SM	3.00	40	12.50	2.00	Surface Mounting
	CR1225SM	3.00	48	12.50	2.50	Surface Mounting
	CR1620SM	3.00	75	16.00	2.00	Surface Mounting
	CR1632SM	3.00	135	16.00	3.20	Surface Mounting
	CR2016SM	3.00	85	20.00	1.60	Surface Mounting
	CR2025SM	3.00	165	20.00	2.50	Surface Mounting
	CR2032SM	3.00	240	20.00	3.20	Surface Mounting
	CR2430SM	3.00	320	24.50	3.00	Surface Mounting
	CR2450SM	3.00	610	24.50	5.00	Surface Mounting
	CR2477SM	3.00	1.000	24.50	7.70	Surface Mounting

MATRIX OF TABBED LITHIUM COIN CELLS

Mounting		Through Hole				Through Hole				Surface Mounting	
Assembly Position		Horizontal assembly				Vertical assembly				SMD assembly	
Description		H				V				SM	
Tab specification	Tab variation	H2	H2B	H3	H3B	V2	V2B	V3	V3B	SM	SM2
	Description	Two Pins	Two Pins wide tab distance	Three Pins	Three Pins wide tab distance	Two Pins	Two Pins wide tab distance	Three Pins	Three Pins wide tab distance	Tabs on each side	Both tabs on same side

NON RECHARGEABLE BATTERIES



LITHIUM COIN CELLS

	MODEL	VOLTAGE (V)	CAPACITY (mAh)	DIAMETER (mm)	HEIGHT (mm)	WEIGHT (g)
	CR1025	3.00	30	10.00	2.50	0.55
	CR1216	3.00	30	12.00	1.60	0.65
	CR1220	3.00	40	12.50	2.00	0.75
	CR1225	3.00	48	12.50	2.50	0.87
	CR1620	3.00	75	16.00	2.00	1.25
	CR1632	3.00	135	16.00	3.20	1.80
	CR2016	3.00	85	20.00	1.60	1.70
	CR2025	3.00	165	20.00	2.50	2.40
	CR2032	3.00	240	20.00	3.20	2.90
	CR2354	3.00	530	23.00	5.40	5.90
	CR2430	3.00	320	24.00	3.00	3.00
	CR2450	3.00	610	24.50	5.00	6.20
	CR2477	3.00	1.000	24.50	7.70	8.70

HIGH TEMPERATURE LITHIUM COIN CELLS

	MODEL	VOLTAGE (V)	CAPACITY (mAh)	DIAMETER (mm)	HEIGHT (mm)	TEMPERATURE RANGE
	CR1632HT	3.00	120	16.00	3.20	-40°C to +125°C
	CR2032HT	3.00	200	20.00	3.20	-40°C to +125°C
	CR2050HT	3.00	300	20.00	5.00	-40°C to +125°C
	CR2450HT	3.00	550	24.00	5.00	-40°C to +125°C

DEVELOPMENT

of innovative battery packs. Also for special operating conditions such as high ambient temperatures

CELL SELECTION

From standard cells to application-specific cell development

ELECTRONICS

Customised protection circuits and battery fuel gauge management. Development and production of hardware and software

CHARGING SOLUTIONS

for diverse battery technologies

CONSULTING

by experienced specialists for battery technology

CERTIFICATION

Fulfillment of all legal and safety-relevant regulations, UN 38.3, UL 2054, UL 1642, IEC 62133, PSE, BIS, CE

HOUSING DESIGN


Soft-pack, plastic housings, metal housings ...

ASSEMBLY

of prototypes and small volume runs up to mass production

+ THE PLUS: JAUCH EXPERTISE

More than 40 years of battery expertise – since 1976

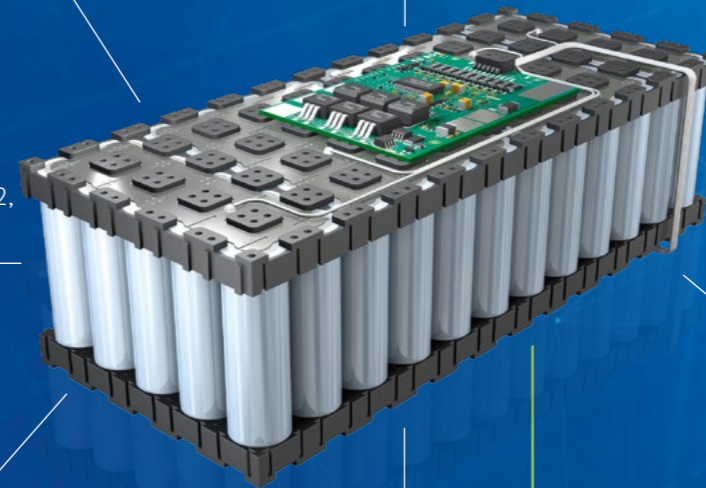


COMPLETE SERVICE FROM A SINGLE SOURCE



LITHIUM THIONYL CHLORIDE BATTERIES

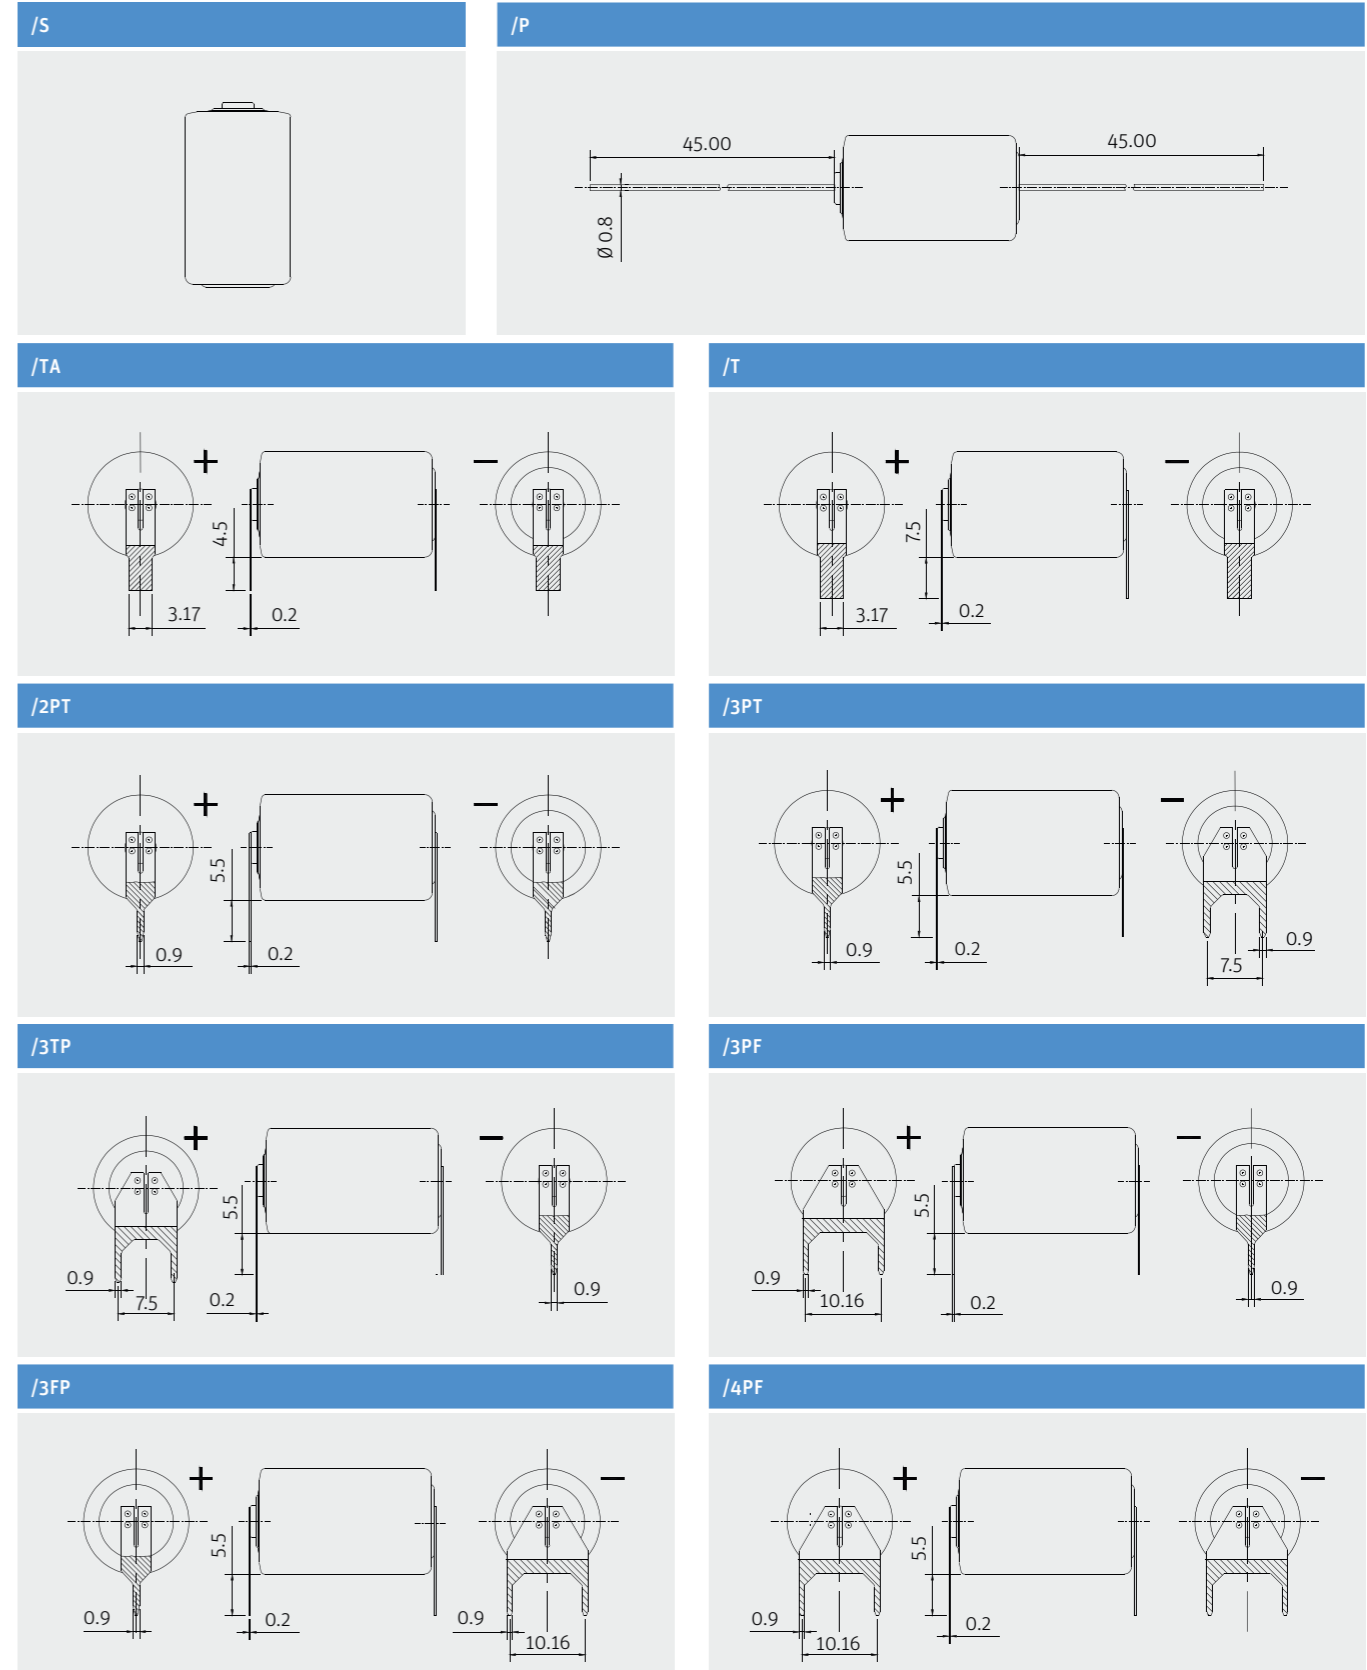


	MODEL	CELL SIZE REFERENCE	VOLTAGE (V)	CAPACITY (mAh)	TEMPERATURE RANGE	TAB VARIATION
	ER2450J-T	Wafer	3.60	500	-55°C to +85°C	PC Pins
	ER32L65J	1/10D	3.60	1000	-55°C to +85°C	PC Pins
	ER14250J-S	1/2AA	3.60	1200	-55°C to +85°C	Single Cell
	ER14250J-T	1/2AA	3.60	1200	-55°C to +85°C	Solder Tab
	ER14250J-2PT	1/2AA	3.60	1200	-55°C to +85°C	2 Pins
	ER14250J-P	1/2AA	3.60	1200	-55°C to +85°C	Axial Leaded
	ER14335J-S	2/3AA	3.60	1650	-55°C to +85°C	Singel Cell
	ER14335J-T	2/3AA	3.60	1650	-55°C to +85°C	Solder Tab
	ER14335J-P	2/3AA	3.60	1650	-55°C to +85°C	Axial Leaded
	ER14505J-S	AA	3.60	2600	-55°C to +85°C	Singel Cell
	ER14505J-T	AA	3.60	2600	-55°C to +85°C	Solder Tab
	ER14505J-P	AA	3.60	2600	-55°C to +85°C	Axial Leaded
	ER14505J-2PT	AA	3.60	2600	-55°C to +85°C	2 Pins
	ER14505J-3PF	AA	3.60	2600	-55°C to +85°C	3 Pins
	ER14505J-3FP	AA	3.60	2600	-55°C to +85°C	3 Pins
	ER17505J-S	A	3.60	3600	-55°C to +85°C	Singel Cell
	ER17505J-T	A	3.60	3600	-55°C to +85°C	Solder Tab
	ER18505J-S	A	3.60	4000	-55°C to +85°C	Singel Cell
	ER18505J-T	A	3.60	4000	-55°C to +85°C	Solder Tab
	ER26500J-S	C	3.60	8500	-55°C to +85°C	Singel Cell
	ER26500J-T	C	3.60	8500	-55°C to +85°C	Solder Tab
	ER34615J-S	D	3.60	19000	-55°C to +85°C	Singel Cell
	ER34615J-T	D	3.60	19000	-55°C to +85°C	Solder Tab



RECHARGEABLE BATTERIES



LITHIUM POLYMER BATTERIES

	MODEL	VOLTAGE (V)	CAPACITY (mAh)	HEIGHT (mm)	WIDTH (mm)	LENGTH (mm)
	LP402025JU	3.7	140	4.00	22.00	27.00
	LP851719JU	3.7	180	8.50	18.00	22.00
	LP502030JH	3.7	250	5.00	21.00	32.00
	LP561836JU	3.7	350	5.60	18.50	38.50
	LP402535JU	3.7	380	4.50	25.50	37.00
	LP333437JU	3.7	410	3.50	34.00	39.00
	LP502243JU	3.7	430	5.20	22.50	45.50
	LP503030JU	3.7	450	5.20	30.00	30.00
	LP802036JU	3.7	480	8.00	20.50	38.00
	LP503040JH	3.7	600	5.00	30.50	42.00
	LP443441JU	3.7	630	4.40	35.00	44.00
	LP102530JU	3.7	680	10.00	26.00	32.00
	LP603443JU	3.7	850	6.00	34.50	45.00
	LP523450JU	3.7	950	5.40	34.80	52.50
	LP305166JH	3.7	1200	3.00	51.00	68.00
	LP503562JU	3.7	1250	5.80	36.00	63.50
	LP503759JU	3.7	1300	5.40	38.00	62.00
	LP633750JH	3.7	1400	6.50	38.00	52.50
	LP103048JU	3.7	1430	9.90	30.50	50.00
	LP883550JU	3.7	1600	8.80	36.00	52.00
	LP605060JU	3.7	1850	6.00	51.00	63.00
	LP103450JH	3.7	1900	10.00	34.50	52.00
	LP504783JU	3.7	2050	5.20	47.50	84.50









RECHARGEABLE BATTERIES



LITHIUM POLYMER BATTERIES

	MODEL	VOLTAGE (V)	CAPACITY (mAh)	HEIGHT (mm)	WIDTH (mm)	LENGTH (mm)
	LP675365JU	3.7	2800	6.90	54.00	68.00
	LP685077JU	3.7	3500	6.80	51.00	79.00
	LP735977JH	3.7	4800	7.30	59.50	78.50
	LP906090JH	3.7	6000	9.00	60.50	93.50

LITHIUM ION BATTERIES

	MODEL	VOLTAGE (V)	CAPACITY (mAh)	WIDTH (mm)	HEIGHT (mm)	LENGTH (mm)
	LI14500J 1s1p	3.6	850	16.00	16.00	53.00
	LI18650JC 1s1p	3.6	2600	20.00	20.00	69.00
	LI18650JLS HB PROTECTED	3.6	3350	19.00	19.00	70.50
	LI18650JLS HB 1s1p	3.6	3350	20.00	20.00	69.00
	LI18650JLS HB 1s2p	3.6	6700	38.00	20.00	69.00
	LI18650JLS HB 2s1p	7.2	3350	38.00	20.00	69.00
	LI18650JLS HB 2s2p	7.2	6700	38.00	38.00	71.00
	LI21700JSV-50 1s1p	7.2	5000	22.00	22.00	75.00

RECHARGEABLE BATTERIES



LITHIUM ION CELLS

	MODEL	VOLTAGE (V)	CAPACITY (mAh)	MAX. DISCHARGE CURRENT (A)	DIAMETER (mm)	LENGTH (mm)
	LI INR18650JD-25P	3.6	2500	30	18.25	64.95
	LI INR18650JD-26E	3.6	2600	7.8	18.25	64.95
	LI INR18650JD-29E	3.6	2900	6	18.25	64.95
	LI INR18650JD-30P	3.6	3000	30	18.25	64.95
	LI INR18650JD-35E	3.6	3500	10	18.25	64.95
	LI INR21700JD-40P	3.6	4000	45	21.5	70.75
	LI INR21700JD-50E	3.6	5000	15	21.4	70.75

RECHARGEABLE BATTERIES



LITHIUM IRON PHOSPHATE BATTERIES

MODEL	VOLTAGE (V)	CAPACITY (Ah)	ENERGY (Wh)	HEIGHT (mm)	WIDTH (mm)	LENGTH (mm)
LFP1207	12.80	7	90	95.0	65.0	151.0
LFP1210	12.80	10	128	95.0	65.0	151.0
LFP1212	12.80	12	154	95.0	98.0	151.0
LFP1216	12.80	16	205	95.0	98.0	151.0
LFP1220	12.80	20	256	167.0	76.5	181.0
LFP1230	12.80	30	384	157.0	130.0	195.0
LFP1250	12.80	50	640	208.0	144.0	229.0
LFP12100	12.80	100	1280	218.0	172.0	330.0
LFP12200	12.80	200	2560	218.0	240.0	522.0

RECHARGEABLE BATTERIES



LITHIUM COIN CELLS

	MODEL	VOLTAGE (V)	CAPACITY (mAh)	HEIGHT (mm)	DIAMETER (mm)
	ML1220	3.0	18	2.0	12.5
	ML2020	3.0	40	2.0	20.0
	ML2032	3.0	65	3.2	20.0
	ML2430	3.0	100	3.0	24.5





DETAILED CERTIFICATION AND TRANSPORT EXPERTISE FOR YOUR APPLICATION

Lithium batteries are subject to many standards and regulations in terms of transport and for product approval.



PROFESSIONAL POWER FROM JAUCH – COMPETENT, FLEXIBLE, ON TIME

If you want to equip your application safely and reliably with a battery system, you have come to the right place. Together with you, Jauch will elaborate the ideal solution with regards to cell selection, designs, electronics, safety and charging technology.

- › Project management
- › Development
- › Prototype construction
- › Series production
- › Certification
- › Logistics and shipping




We take into account special design requests as well as all relevant safety aspects. Jauch provides you with the best of expertise for development and production based on decades of experience to bring your solution onto the market safely, on time and within the law.



A certification of the battery is often required for approval of your application. We ensure that the battery reliably meets the industrial and approval requirements. All internationally required certifications can be performed. And of course, our lithium batteries are also tested for shipping according to the internationally accepted UN38.3 standard.

CUSTOMIZED TRANSPORT AND LOGISTICS SOLUTIONS

Our staff are specially trained in the shipment of dangerous goods and are IATA-certified.

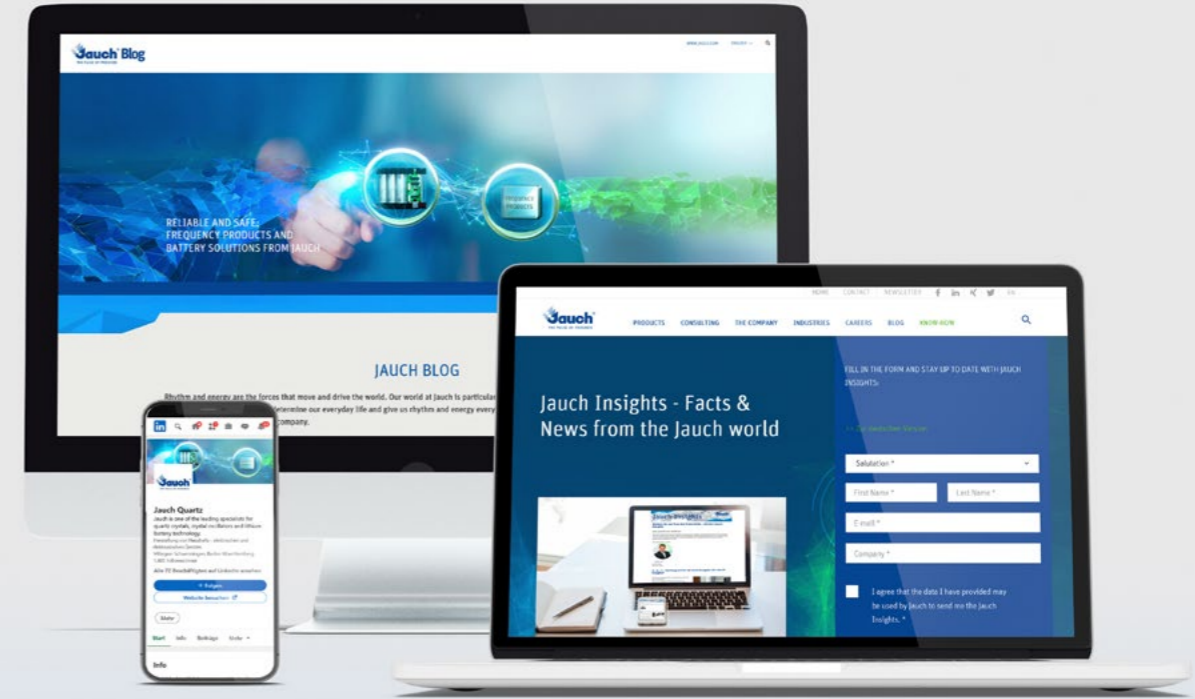

STAY INFORMED

Jauch provides the impulse for progress in battery technology through a wide variety of media or channels. Follow us and you will always be informed about the latest news on technologies, new regulations, services, seminars and products.

We know how to get batteries to their destination quickly and safely. Because we stress the highest quality and safety standards even in shipping, ensuring that our products reach you in time.

- › SAP R/3 controlled paternoster warehouse
- › Our “known consignor” status guarantees fast and secure shipping
- › Transport safety through compliance with the internationally accepted UN38.3 standard
- › Support for our customers on adherence to legally mandatory transportation, storage and handling regulations



Jauch Quartz Deutschland
Jauch Quartz



Jauch Quartz

Newsletter



Blog



RELIABLE AND SAFE: FREQUENCY PRODUCTS AND BATTERY SOLUTIONS FROM JAUCH



ABOUT JAUCH

The Jauch Group is one of the leading specialists for quartz crystals, crystal oscillators and battery technology. Established in 1954, we are a leading company in the frequency control products industry, and have recently added MEMS timing oscillators to our range. We are also a recognized expert for lithium ion and lithium polymer battery solutions.

With our in-depth technical consulting, certification expertise and advanced test environments, we are able to underline our claim to leadership.

Along with our subsidiaries in France, Great Britain and America, we are able to develop and provide pioneering technology solutions.





Jauch Quartz GmbH
In der Lache 24
78056 Villingen-Schwenningen
Germany

Jauch Quartz France
121 rue d'Aguesseau
92100 Boulogne-Billancourt
France

Jauch Quartz UK, Ltd.
Unit 4.7, Frimley 4 Business Park
Frimley, Surrey, GU16 7SG
United Kingdom

Jauch Quartz America, Inc.
43-100 Cook St, Ste 200
Palm Desert, CA 92211
USA

FREQUENCY CONTROL PRODUCTS




- › Quartz Crystals
- › Crystal Oscillators
- › TCXOs
- › OCXOs



TECHNICAL SUPPORT FROM YOUR LOCAL JAUCH TEAM

- › Consultation
- › Design-In Support
- › Support for application problems
- › Oscillator circuit validation

Talk to us about the optimal clock solution as early as the design phase starts. We will help you through the project-specific preselection of suitable components and calculations for special applications.

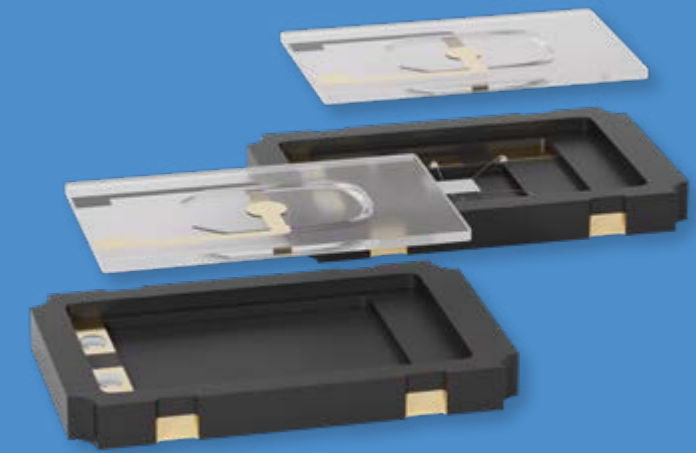

Your local sales and technical teams will support you in finding the right frequency control product for you. We will offer support from the beginning, allowing you to minimize your development time and cut unnecessary costs.

WORLDWIDE UNIQUE SERVICE FOR YOUR DEVELOPER

- › Creation of custom specifications for your project
- › Increased operational reliability in series production
- › Cost-optimized component selection and specification for the entire project life
- › Detailed advice and supervision by specialists
- › Validation of your circuit using special testing equipment
- › Samples for pilot productions or prototypes

Sustainability



EcoVadis conducts sustainability ratings worldwide in accordance with international sustainability standards. In January 2025, the Jauch Group received the EcoVadis silver medal for its sustainability performance. This globally recognized rating evaluates companies in

four key areas: environment, labor and human rights, ethics, and sustainable procurement. Jauch achieved this recognition on its first participation, placing it in the top 15% of all participating companies. This confirms our commitment to a responsible and sustainable future.

QUARTZ CRYSTALS – SMD



QUARTZ CRYSTAL • SMD • CERAMIC/METAL PACKAGE

	TYPE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY TOLERANCE*	FREQUENCY STABILITY*	L x W x H in mm
	JXS08	37.40~80.0	-40 °C ~ +85 °C	±10 ppm	±10 ppm	1.0 x 0.8 x 0.3
	JXS10	24.0~80.0	-40 °C ~ +85 °C	±10 ppm	±10 ppm	1.2 x 1.0 x 0.3
	JXS11	24.0~80.0	-40 °C ~ +125 °C	±10 ppm	±10 ppm	1.6 x 1.2 x 0.4
	JXS21	16.0~80.0	-40 °C ~ +125 °C	±10 ppm	±10 ppm	2.0 x 1.6 x 0.5
	JXS22	12.0~66.0	-40 °C ~ +125 °C	±10 ppm	±10 ppm	2.5 x 2.0 x 0.55
	JXS32	8.0~54.0 54.0~125.0 (3rd OT) on request	-40 °C ~ +125 °C	±10 ppm	±10 ppm	3.2 x 2.5 x 0.7
	JXS53	8.0~125.0	-40 °C ~ +125 °C	±10 ppm	±10 ppm	5.0 x 3.2 x 0.8
	JXS75	6.0~48.0	-40 °C ~ +125 °C	±10 ppm	±20 ppm	7.0 x 5.0 x 1.3

QUARTZ CRYSTAL FOR WIRELESS • SMD • CERAMIC/METAL PACKAGE

	TYPE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY TOLERANCE*	FREQUENCY STABILITY*	L x W x H in mm
	JXS21-WA	16.0~80.0	-40 °C ~ +105 °C	±10 ppm	±10 ppm	2.0 x 1.6 x 0.5
	JXS22-WA	16.0~52.0	-40 °C ~ +105 °C	±10 ppm	±10 ppm	2.5 x 2.0 x 0.55
	JXS32-WA	13.56~52.0	-40 °C ~ +105 °C	±10 ppm	±10 ppm	3.2 x 2.5 x 0.7

QUARTZ CRYSTAL • SMD • METAL PACKAGE/MOLDED BASE

	TYPE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY TOLERANCE*	FREQUENCY STABILITY*	L x W x H in mm
	SMU2	4.0~33.0	-40 °C ~ +125 °C	±20 ppm	±20 ppm	11.5 x 4.8 x 3.0
	SMU4	3.2768~40.0	-40 °C ~ +105 °C	±20 ppm	±20 ppm	11.5 x 4.8 x 4.0
	SMU5	3.2768~40.0	-40 °C ~ +125 °C	±20 ppm	±20 ppm	13.1 x 5.0 x 5.0

* Please note: best frequency stability is not always available in max. temperature range. Full data can be found online. All specifications are subject to change without notice.

QUARTZ CRYSTALS – PIN TYPE AND SMD



QUARTZ CRYSTAL • PIN TYPE • METAL PACKAGE

	TYPE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY TOLERANCE*	FREQUENCY STABILITY*	L x W x H in mm
	SS2	4.0~33.0	-40 °C ~ +125 °C	±20 ppm	±20 ppm	11.3 x 4.7 x 2.5
	SS4	3.2768~40.0	-40 °C ~ +105 °C	±20 ppm	±20 ppm	11.3 x 4.7 x 2.5
	HC49/U	1.843~250.0	-40 °C ~ +125 °C	±3 ppm	±3 ppm	10.8 x 4.5 x 13.0
	HC49/U-SMC	1.843~250.0	-40 °C ~ +125 °C	±3 ppm	±3 ppm	17.5 x 10.8 x 5.3
	MQ1	4.0~250.0	-40 °C ~ +125 °C	±5 ppm	±3 ppm	7.9 x 3.3 x 8.0
	MQ1-SMC	4.0~250.0	-40 °C ~ +125 °C	±5 ppm	±3 ppm	11.7 x 7.8 x 3.4
	MQ5	10.0~250.0	-40 °C ~ +125 °C	±5 ppm	±3 ppm	7.7 x 3.1 x 5.8
	MQ5-SMC	10.0~250.0	-40 °C ~ +125 °C	±5 ppm	±3 ppm	9.7 x 7.7 x 3.4

TUNING FORK CRYSTAL • SMD

	TYPE	FREQUENCY RANGE in kHz	TEMPERATURE RANGE (max.)*	FREQUENCY TOLERANCE*	FREQUENCY STABILITY*	L x W x H in mm
	JTX110	32.7680 kHz	-40 °C ~ +105 °C	±20 ppm	-80 ppm	1.6 x 1.0 x 0.5
	JTX210	32.7680 kHz	-40 °C ~ +125 °C	±20 ppm	-80 ppm	2.0 x 1.2 x 0.6
	JTX310	32.7680 kHz	-40 °C ~ +125 °C	±10 ppm	-80 ppm	3.2 x 1.5 x 0.9
	SMQ32SL	32.7680 kHz	-40 °C ~ +85 °C	±10 ppm	-80 ppm	8.0 x 3.8 x 2.4
	SMQ32SN	32.7680 kHz	-40 °C ~ +85 °C	±20 ppm	-80 ppm	7.0 x 1.5 x 1.3
	SM26F	32.7680 kHz	-40 °C ~ +85 °C	±20 ppm	-80 ppm	6.0 x 2.0 x 2.0

TUNING FORK CRYSTAL • PIN TYPE

	TYPE	FREQUENCY RANGE in kHz	TEMPERATURE RANGE (max.)*	FREQUENCY TOLERANCE*	FREQUENCY STABILITY*	L x W x H in mm
	MMTF32	32.7680 kHz	-40 °C ~ +85 °C	±10 ppm	-80 ppm	6.0 x 2.0 x 2.0

* Please note: best frequency stability is not always available in max. temperature range. Full data can be found online. All specifications are subject to change without notice.

QUARTZ CRYSTALS QUALIFIED TO AEC-Q200



QUARTZ CRYSTALS FOR AUTOMOTIVE APPLICATIONS

	TYPE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY TOLERANCE*	FREQUENCY STABILITY*	L x W x H in mm
	JXS10P4	32.0 ~ 60.0	-40 °C ~ +125 °C	±10 ppm	±15 ppm	1.2 x 1.0 x 0.3
	JXS11P4	24.0 ~ 60.0	-40 °C ~ +125 °C	±10 ppm	±15 ppm	1.6 x 1.2 x 0.4
	JXS21P4	16.0 ~ 60.0	-40 °C ~ +125 °C	±10 ppm	±15 ppm	2.0 x 1.6 x 0.55
	JXS22P4	12.0 ~ 54.0	-40 °C ~ +125 °C	±10 ppm	±15 ppm	2.5 x 2.0 x 0.6
	JXS32P4	8.0 ~ 54.0	-40 °C ~ +150 °C	±10 ppm	±15 ppm	3.2 x 2.5 x 0.7
	SMU2	4.0 ~ 33.0	-40 °C ~ +125 °C	±20 ppm	±30 ppm	11.5 x 4.8 x 3.0
	SMU3	3.276 ~ 33.0 27.0 ~ 60.0 (3rd OT) on request	-40 °C ~ +125 °C	±20 ppm	±20 ppm	11.5 x 4.8 x 4.0
	JTX310	32.7680 kHz	-40 °C ~ +125 °C	±10 ppm	-80 ppm	3.2 x 1.5 x 0.9
	JTX210	32.7680 kHz	-40 °C ~ +125 °C	±20 ppm	-80 ppm	2.0 x 1.2 x 0.6

* Please note: best frequency stability is not always available in max. temperature range. Full data can be found online. All specifications are subject to change without notice.

CUSTOMIZED QUARTZ CRYSTALS

- › Extremely tight frequency stabilities
- › Lowest ESR values
- › Special pulling sensitivities

CUSTOMIZED QUARTZ CRYSTALS

	TYPE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY TOLERANCE*	FREQUENCY STABILITY*	L x W x H in mm
	HC49/U	1.8432 ~ 40.0 (fund. AT) 20.0 ~ 105.0 (3rd OT)	-40 °C ~ +125 °C	±3 ppm	±3 ppm	10.8 x 4.5 x 13.0
	HC49/U SMC	50.0 ~ 175.0 (5th OT) 70.0 ~ 250.0 (7th OT)	-40 °C ~ +125 °C	±3 ppm	±3 ppm	17.5 x 10.8 x 5.3
	MQ1	4.0 ~ 40.0 (fund. AT) 20.0 ~ 105.0 (3rd OT)	-40 °C ~ +125 °C	±5 ppm	±3 ppm	7.9 x 3.3 x 8.0
	MQ1-SMC	50.0 ~ 175.0 (5th OT) 70.0 ~ 250.0 (7th OT)	-40 °C ~ +125 °C	±5 ppm	±3 ppm	11.7 x 7.8 x 3.4
	MQ5	10.0 ~ 40.0 (fund. AT) 30.0 ~ 105.0 (3rd OT)	-40 °C ~ +125 °C	±5 ppm	±3 ppm	7.7 x 3.1 x 5.8
	MQ5-SMC	50.0 ~ 175.0 (5th OT) 70.0 ~ 250.0 (7th OT)	-40 °C ~ +125 °C	±5 ppm	±3 ppm	9.7 x 7.7 x 3.4

* Please note: best frequency stability is not always available in max. temperature range. Full data can be found online. All specifications are subject to change without notice.

QUARTZ CRYSTAL OSCILLATORS SMD



JO11 • OSCILLATOR • HCMOS • SMD • CERAMIC/METAL PACKAGE

	TYPE	FEATURE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY STABILITY*	OUTPUT AND LOAD	L x W x H in mm
	JO11 (1.8 V ~ 3.3 V)	variable supply voltage	5.0 ~ 60.0	-40 °C ~ +125 °C	±25 ppm	15 pF HCMOS	1.6 x 1.2 x 0.7

JO21 • OSCILLATOR • HCMOS • SMD • CERAMIC/METAL PACKAGE

	TYPE	FEATURE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY STABILITY*	OUTPUT AND LOAD	L x W x H in mm
	JO21 (1.8 V ~ 3.3 V)	variable supply voltage	1.0 ~ 50.0	-40 °C ~ +125 °C	±25 ppm	15 pF HCMOS	2.0 x 1.6 x 0.8
	JO21 (3.3 V)	Stop Function	0.5 ~ 80.0	-40 °C ~ +125 °C	±25 ppm	12 pF HCMOS	2.0 x 1.6 x 0.8
	JO21 (2.5 V)	Stop Function	0.5 ~ 80.0	-40 °C ~ +125 °C	±25 ppm	12 pF HCMOS	2.0 x 1.6 x 0.8
	JO21 (1.8 V)	Stop Function	0.5 ~ 80.0	-40 °C ~ +125 °C	±25 ppm	12 pF HCMOS	2.0 x 1.6 x 0.8

JO22 • OSCILLATOR • HCMOS • SMD • CERAMIC/METAL PACKAGE

	TYPE	FEATURE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY STABILITY*	OUTPUT AND LOAD	L x W x H in mm
	JO22 (1.8 V ~ 3.3 V)	variable supply voltage	1.0 ~ 50.0	-40 °C ~ +125 °C	±25 ppm	15 pF HCMOS	2.5 x 2.0 x 0.9
	JO22 (3.3 V)	Stop Function	0.5 ~ 133.0	-40 °C ~ +125 °C	±25 ppm	15 pF HCMOS	2.5 x 2.0 x 0.9
	JO22 (3.0 V)	Stop Function	0.5 ~ 133.0	-40 °C ~ +125 °C	±25 ppm	15 pF HCMOS	2.5 x 2.0 x 0.9
	JO22 (2.5 V)	Stop Function	0.5 ~ 133.0	-40 °C ~ +125 °C	±25 ppm	15 pF HCMOS	2.5 x 2.0 x 0.9
	JO22 (1.8 V)	Stop Function	0.5 ~ 133.0	-40 °C ~ +125 °C	±25 ppm	15 pF HCMOS	2.5 x 2.0 x 0.9
	JO22H (1.8 V / 2.5 V / 3.3 V)	High Stability Type	13.0 ~ 54.0	-40 °C ~ +85 °C	±10 ppm	15 pF HCMOS	2.5 x 2.0 x 0.9

* Please note: best frequency stability is not always available in max. temperature range. Full data can be found online. All specifications are subject to change without notice.

QUARTZ CRYSTAL OSCILLATORS SMD



J032 • OSCILLATOR • HCMOS • SMD • CERAMIC/METAL PACKAGE

	TYPE	FEATURE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY STABILITY*	OUTPUT AND LOAD	L x W x H in mm
	J032 (1.8 V ~ 3.3 V)	variable supply voltage	1.0 ~ 50.0	-40 °C ~ +125 °C	±25 ppm	15 pF / 30 pF HCMOS	3.2 x 2.5 x 1.1
	J032 (3.3 V)	Stop Function	0.75 ~ 170.0	-40 °C ~ +125 °C	±25 ppm	15 pF / 30 pF HCMOS	3.2 x 2.5 x 1.1
	J032 (3.0 V)	Stop Function	0.75 ~ 170.0	-40 °C ~ +125 °C	±25 ppm	15 pF / 30 pF HCMOS	3.2 x 2.5 x 1.1
	J032 (2.8 V)	Stop Function	0.75 ~ 170.0	-40 °C ~ +125 °C	±25 ppm	15 pF / 30 pF HCMOS	3.2 x 2.5 x 1.1
	J032 (2.5 V)	Stop Function	0.75 ~ 170.0	-40 °C ~ +125 °C	±25 ppm	15 pF / 30 pF HCMOS	3.2 x 2.5 x 1.1
	J032 (1.8 V)	Stop Function	0.75 ~ 135.0	-40 °C ~ +125 °C	±25 ppm	15 pF / 30 pF HCMOS	3.2 x 2.5 x 1.1
	J033H (1.8 V / 2.5 V / 3.3 V)	High Stability Type	10.0 ~ 54.0	-40 °C ~ +85 °C	±10 ppm	15 pF HCMOS	3.2 x 2.5 x 1.0

J053 • OSCILLATOR • HCMOS • SMD • CERAMIC/METAL PACKAGE

	TYPE	FEATURE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY STABILITY*	OUTPUT AND LOAD	L x W x H in mm
	J053 (3.3 V)	Stop Function	0.5 ~ 160.0	-40 °C ~ +125 °C	±20 ppm	15 pF / 30 pF HCMOS	5.0 x 3.2 x 1.4
	J053 (2.5 V)	Stop Function	0.5 ~ 160.0	-40 °C ~ +125 °C	±20 ppm	15 pF / 30 pF HCMOS	5.0 x 3.2 x 1.4
	J053 (1.8 V)	Stop Function	0.5 ~ 160.0	-40 °C ~ +125 °C	±20 ppm	15 pF / 30 pF HCMOS	5.0 x 3.2 x 1.4
	J053 (5.0 V) Stop	Stop Function	1.0 ~ 170.0	-40 °C ~ +85 °C	±20 ppm	15 pF / 30 pF 50 pF HCMOS	5.0 x 3.2 x 1.4

J075 • OSCILLATOR • HCMOS • SMD • CERAMIC/METAL PACKAGE

	TYPE	FEATURE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY STABILITY*	OUTPUT AND LOAD	L x W x H in mm
	J075 (3.3 V)	Stop Function	1.0 ~ 170.0	-40 °C ~ +125 °C	±20 ppm	15 pF / 30 pF HCMOS	7.0 x 5.0 x 1.8
	J075 (2.5 V)	Stop Function	0.5 ~ 160.0	-40 °C ~ +125 °C	±20 ppm	15 pF / 30 pF HCMOS	7.0 x 5.0 x 1.8
	J075 (1.8 V)	Stop Function	0.5 ~ 160.0	-40 °C ~ +125 °C	±20 ppm	15 pF / 30 pF HCMOS	7.0 x 5.0 x 1.8
	J075 (5.0 V) Stop	Stop Function	1.0 ~ 170.0	-40 °C ~ 85 °C	±20 ppm	15 pF / 30 pF 50 pF HCMOS	7.0 x 5.0 x 1.4

* Please note: best frequency stability is not always available in max. temperature range. Full data can be found online. All specifications are subject to change without notice.

QUARTZ CRYSTAL OSCILLATORS SMD



JV - VCXO - HCMOS - SMD - CERAMIC/METAL PACKAGE

	TYPE	FEATURE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY STABILITY*	OUTPUT AND LOAD	L x W x H in mm
	JV32 (3.3 V)	VCXO	1.25 ~ 55.0	-40 °C ~ +85 °C	±25 ppm	15 pF HCMOS	3.2 x 2.5 x 1.0
	JV54 (3.3 V)	VCXO	1.0 ~ 125.0	-40 °C ~ +85 °C	±25 ppm	15 pF HCMOS	5.0 x 3.2 x 1.2
	JV75 (3.3 V)	VCXO	1.0 ~ 125.0	-40 °C ~ +85 °C	±25 ppm	15 pF HCMOS	7.0 x 5.0 x 1.9

TUNING FORK OSCILLATOR - 32.768 kHz - SMD - CERAMIC/METAL PACKAGE

	TYPE	FEATURE	FREQUENCY RANGE in kHz	TEMPERATURE RANGE (max.)*	FREQUENCY STABILITY*	OUTPUT AND LOAD	L x W x H in mm
	JR032 (1.2 V ~ 5.0 V)	uses tuning Fork Crystal	32.768 kHz	-40 °C ~ +105 °C	±25 ppm	15 pF HCMOS	3.2 x 2.5 x 1.0
	J032 32.768 kHz	AT-cut	32.768 kHz	-40 °C ~ +125 °C	±25 ppm	15 pF HCMOS	3.2 x 2.5 x 1.0
	J022 32.768 kHz	AT-cut	32.768 kHz	-40 °C ~ +125 °C	±25 ppm	15 pF HCMOS	2.5 x 2.0 x 0.8

* Please note: best frequency stability is not always available in max. temperature range. Full data can be found online. All specifications are subject to change without notice.

(VOLTAGE CONTROLLED) TEMPERATURE COMPENSATED CRYSTAL OSCILLATORS



(VC)TCXO - CLIPPED SINE - SMD - CERAMIC/METAL PACKAGE

	TYPE	FEATURE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY STABILITY*	OUTPUT AND LOAD	L x W x H in mm
	JT11S(V)	VCTCXO or TCXO	13.0 ~ 52.0	-40 °C ~ +85 °C	±0.5 ppm	10 KΩ // 10 pF > 0.8 Vpp (clipped sine)	1.6 x 1.2 x 0.55
	JT11LE (1.2 ~ 1.8V)	Low Voltage TCXO	13.0 ~ 52.0	-40 °C ~ +85 °C	±0.5 ppm	10 KΩ // 10 pF > 0.8 Vpp (clipped sine)	1.6 x 1.2 x 0.55
	JT11G	TCXO for GPS	26.0 / 38.40 / 52.0	-40 °C ~ +85 °C	±0.5 ppm	10 KΩ // 10 pF > 0.8 Vpp (clipped sine)	1.6 x 1.2 x 0.55
	JT11GLE (1.2 ~ 1.8V)	Low Voltage TCXO for GPS	26.0 / 38.40 / 52.0	-40 °C ~ +85 °C	±0.5 ppm	10 KΩ // 10 pF > 0.8 Vpp (clipped sine)	1.6 x 1.2 x 0.55
	JT21S(V)	VCTCXO or TCXO	13.0 ~ 52.0	-40 °C ~ +85 °C	±0.5 ppm	10 KΩ // 10 pF > 0.8 Vpp (clipped sine)	2.0 x 1.6 x 0.8
	JT21ETE	TCXO and Standby Function	12.0 ~ 52.0	-40 °C ~ +105 °C	±2.0 ppm	10 KΩ // 10 pF > 0.8 Vpp (clipped sine)	2.0 x 1.6 x 0.8
	JT21LE (1.2 ~ 1.8V)	Low Voltage TCXO	13.0 ~ 52.0	-40 °C ~ +85 °C	±0.5 ppm	10 KΩ // 10 pF > 0.8 Vpp (clipped sine)	2.0 x 1.6 x 0.8
	JT21G	TCXO for GPS	26.0 ~ 38.40	-40 °C ~ +85 °C	±0.5 ppm	10 KΩ // 10 pF > 0.8 Vpp (clipped sine)	2.0 x 1.6 x 0.7
	JT21GLE (1.2 ~ 1.8V)	Low Voltage TCXO for GPS	26.0 / 38.40 / 52.0	-40 °C ~ +85 °C	±0.5 ppm	10 KΩ // 10 pF > 0.8 Vpp (clipped sine)	2.0 x 1.6 x 0.7
	JT22S(V)	VCTCXO or TCXO	10.0 ~ 52.0	-40 °C ~ +85 °C	±1 ppm	10 KΩ // 10 pF > 0.8 Vpp (clipped sine)	2.5 x 2.0 x 0.95
	JT33(V)	VCTCXO or TCXO	10.0 ~ 52.0	-40 °C ~ +85 °C	±1 ppm	10 KΩ // 10 pF > 0.8 Vpp (clipped sine)	3.2 x 2.5 x 1.0
	JT53L(V)	VCTCXO or TCXO	10.0 ~ 52.0	-40 °C ~ +85 °C	±1 ppm	10 KΩ // 10 pF > 0.8 Vpp (clipped sine)	5.0 x 3.2 x 1.05

(VOLTAGE CONTROLLED) TEMPERATURE COMPENSATED CRYSTAL OSCILLATORS



TCXO - HCMOS - SMD - CERAMIC/METAL PACKAGE

	TYPE	FEATURE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY STABILITY*	OUTPUT AND LOAD	L x W x H in mm
	JT21CT	TCXO	13.0 ~ 52.0	-40 °C ~ +105 °C	±2.0 ppm	15 pF HCMOS	2.0 x 1.6 x 0.7
	JT22CT	TCXO	13.0 ~ 52.0	-40 °C ~ +105 °C	±2.0 ppm	15 pF HCMOS	2.5 x 2.0 x 0.8
	JT32CT	TCXO	10.0 ~ 52.0	-40 °C ~ +105 °C	±2.0 ppm	15 pF HCMOS	3.2 x 2.5 x 1.0

(VC)TCXO PRECISION - HCMOS - SMD

	TYPE	FEATURE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY STABILITY*	OUTPUT AND LOAD	L x W x H in mm
	JTP53HC(V)	TCXO Precision	9.6 ~ 50.0	-40 °C ~ +105 °C	±0.05 ppm	15 pF HCMOS	5.0 x 3.2 x 1.7
	JTS53HC(V)	Stratum 3 compliant (VC)TCXO	9.6 ~ 50.0	-40 °C ~ +105 °C	±0.05 ppm	15 pF HCMOS	5.0 x 3.2 x 1.7
	JTP75HC(V)	TCXO Precision	9.6 ~ 50.0	-40 °C ~ +105 °C	±0.05 ppm	15 pF HCMOS	7.0 x 5.0 x 2.2
	JTS75HC(V)	Stratum 3 compliant (VC)TCXO	9.6 ~ 50.0	-40 °C ~ +105 °C	±0.05 ppm	15 pF HCMOS	7.0 x 5.0 x 2.2

(VC)TCXO PRECISION - CLIPPED SINE - SMD

	TYPE	FEATURE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY STABILITY*	OUTPUT AND LOAD	L x W x H in mm
	JTP32CS(V)	TCXO Precision	9.6 ~ 50.0	-40 °C ~ +85 °C	±0.28 ppm	10 KΩ // 10 pF > 0.6 Vpp (clipped sine)	3.2 x 2.5 x 0.9
	JTS32CS(V)	Stratum 3 compliant (VC)TCXO	9.6 ~ 50.0	-40 °C ~ +85 °C	±0.28 ppm	10 KΩ // 10 pF > 0.6 Vpp (clipped sine)	3.2 x 2.5 x 0.9

OCXO - OSCILLATOR - SINE OR HCMOS

	TYPE	FEATURE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY STABILITY*	OUTPUT AND LOAD	L x W x H in mm
	JOX254	VCOCXO or OCXO	10.0 ~ 100.0	-40 °C ~ +85 °C	±0.5 ppb ~ ±50 ppb	Sine or HCMOS	25.4 x 25.4 x 13

* Please note: best frequency stability is not always available in max. temperature range. Full data can be found online. All specifications are subject to change without notice.

* Please note: best frequency stability is not always available in max. temperature range. Full data can be found online. All specifications are subject to change without notice.

XO HCSSL - LVDS - LVPECL



OSCILLATOR PECL - SMD - CERAMIC/METAL PACKAGE

	TYPE	FEATURE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY STABILITY*	OUTPUT AND LOAD	L x W x H in mm
	JOE75 MESA	LVPECL XO	170.0 ~ 320.0	-40 °C ~ +85 °C	±25 ppm	50 Ω at VDC ~ 2.0 V	7.0 x 5.0 x 1.4
	JOE75 30T	LVPECL XO	65.0 ~ 200.0	-40 °C ~ +85 °C	±25 ppm	50 Ω at VDC ~ 2.0 V	7.0 x 5.0 x 1.5
	JOE32	LVPECL XO	13.5 ~ 200.0	-40 °C ~ +125 °C	±25 ppm	50 Ω at ~ 1.3 V	3.2 x 2.5 x 0.95
	JOE21 Low Jitter	LVPECL XO	100.0 ~ 160.0	-40 °C ~ +85 °C	±50 ppm	50 Ω (terminus to Vcc-2V)	2.0 x 1.6 x 0.75

OSCILLATOR LVDS - SMD - CERAMIC/METAL PACKAGE

	TYPE	FEATURE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY STABILITY*	OUTPUT AND LOAD	L x W x H in mm
	JOD75 MESA	LVDS XO	170.0 ~ 320.0	-40 °C ~ +85 °C	±25 ppm	100 Ω differential > 0.33 Vp-p typ. / 0.25 Vp-p min.	7.0 x 5.0 x 1.4
	JOD75 30T	LVDS XO	65.0 ~ 200.0	-40 °C ~ +85 °C	±25 ppm	100 Ω differential > 0.33 Vp-p typ. / 0.25 Vp-p min.	7.0 x 5.0 x 1.5
	JOD32	LVDS XO	13.5 ~ 200.0	-40 °C ~ +125 °C	±25 ppm	100 Ω differential > 0.33 Vp-p typ. / 0.25 Vp-p min.	3.2 x 2.5 x 0.95
	JOD21 Low Jitter	LVDS XO	100.0 ~ 160.0	-40 °C ~ +85 °C	±50 ppm	100 Ω differential > 0.33 Vp-p typ. / 0.25 Vp-p min.	2.0 x 1.6 x 0.75

OSCILLATOR HCSSL - SMD - CERAMIC/METAL PACKAGE

	TYPE	FEATURE	FREQUENCY RANGE in MHz	TEMPERATURE RANGE (max.)*	FREQUENCY STABILITY*	OUTPUT AND LOAD	L x W x H in mm
	JOH32	HCSSL XO	13.5 ~ 200.0	-40 °C ~ +125 °C	±25 ppm	50 Ω to GND at each output > 0.65 Vp-p (3.3 V) / 0.6 Vp-p (2.5 V)	3.2 x 2.5 x 0.95
	JOH21 Low Jitter	HCSSL XO	100.0 ~ 160.0	-40 °C ~ +85 °C	±50 ppm	50 Ω to GND at each output > 0.65 Vp-p (3.3 V) / 0.6 Vp-p (2.5 V)	2.0 x 1.6 x 0.75

* Please note: best frequency stability is not always available in max. temperature range. Full data can be found online. All specifications are subject to change without notice.




From frequency control products for standard applications to highly stable, shock-resistant components – Jauch products operate reliably in your applications. We ensure this with our quality assurance, which starts even before production does.

JAUCH QUALITY MANAGEMENT

To maintain the consistently high quality of our products and services, we continuously implement measures to safeguard and improve our effectiveness and efficiency. These include internal audits of system, process and procedure workflows as well as audits of our production partners and suppliers.

In addition, important key figures are regularly determined in order to keep a constant eye on quality and make targeted decisions.

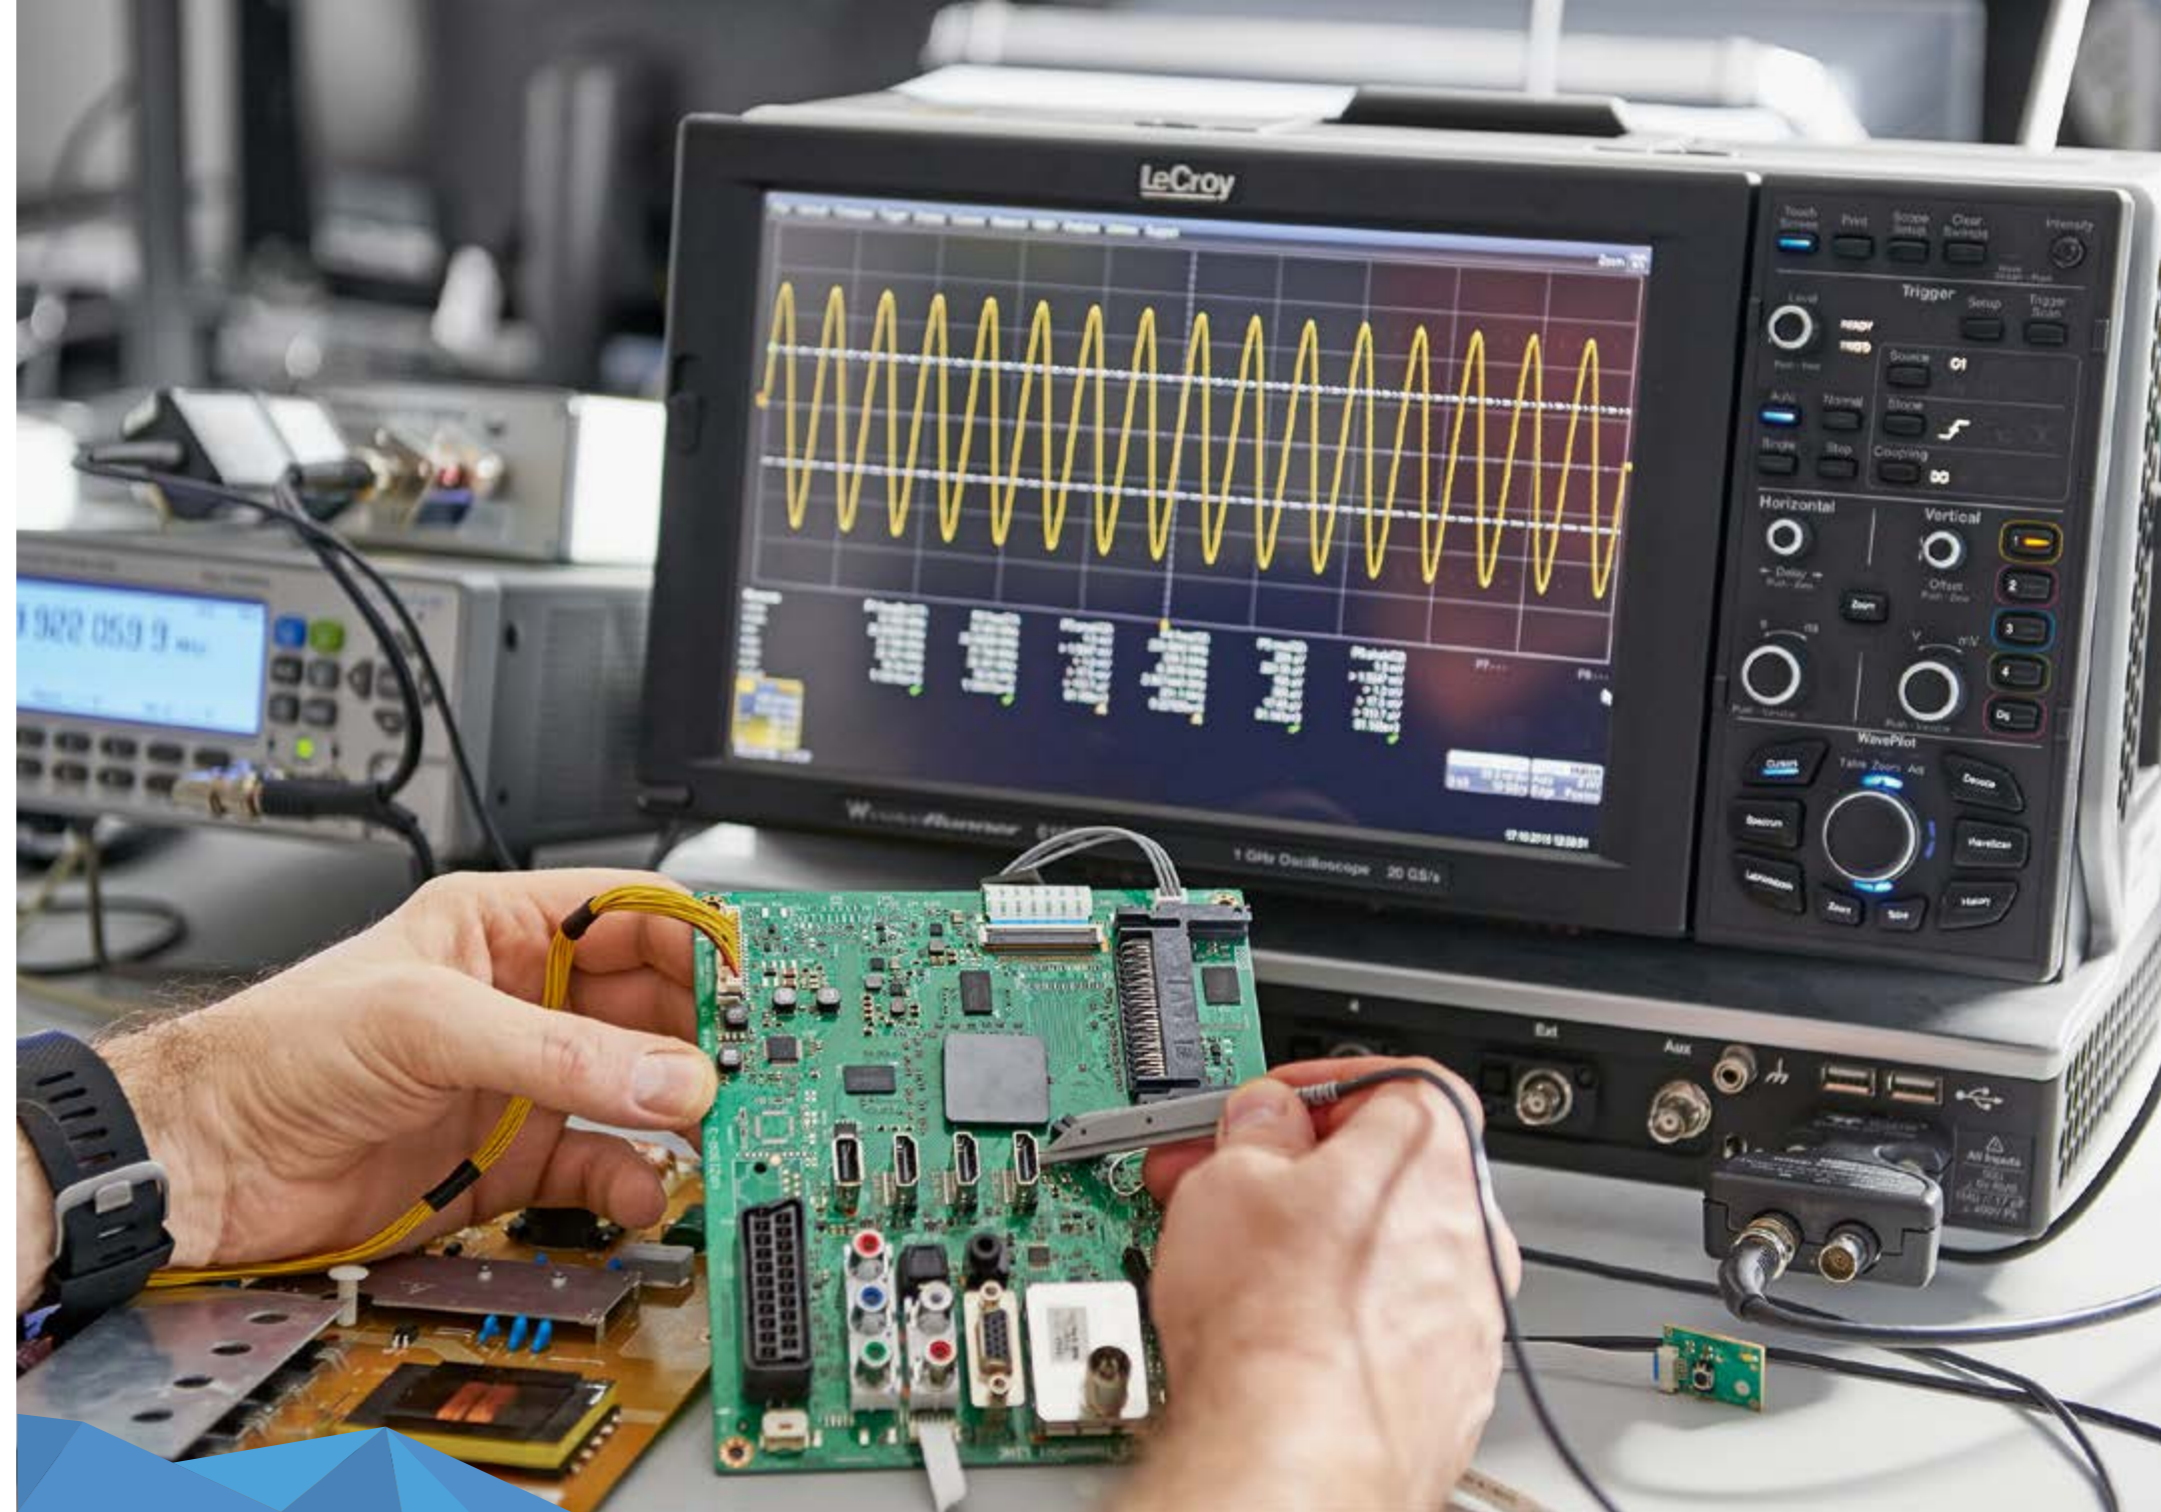

JAUCH QUALITY ASSURANCE

- › ISO 9001:2015, ISO 14001 certification and IATF 16949 for automotive applications
- › Internal & external audit procedure
- › Key figure determination
- › Components qualification
- › Determining the reliability figures of specific components
- › Product verification according to RoHS and REACH
- › Components inspection
- › Incoming and outgoing goods inspection
- › Calibration

RELIABLE AND SAFE:

FREQUENCY PRODUCTS AND BATTERY SOLUTIONS



FREQUENCY
PRODUCTS

ABOUT JAUCH

The Jauch Group is one of the leading specialists for quartz crystals, crystal oscillators, (VC)TCXOs, VCXOs and battery technology. Established in 1954, we are a leading company in the frequency control products industry.



We are also a recognized expert for lithium ion and lithium polymer battery solutions. Along with our subsidiaries in France, Great Britain and the USA, we are able to develop and provide pioneering technology solutions.



Frequency Control and Battery Technology



Find technical knowledge and interesting content in the form of e-books, whitepapers and documents relating to frequency control products and battery technology.

https://www.jauch.com/en-INT/know_how



Learn more about our frequency products and services.

https://www.jauch.com/en-INT/consulting/frequency_technical_services

#WeAreJauch



Jauch Quartz GmbH
In der Lache 24
78056 Villingen-Schwenningen
Germany

Jauch Quartz France
121 rue d'Aguesseau
92100 Boulogne-Billancourt
France

Jauch Quartz UK, Ltd.
Unit 4.7, Frimley 4 Business Park
Frimley, Surrey, GU16 7SG
United Kingdom

Jauch Quartz America, Inc.
43-1005 Cook St, Ste 200
Palm Desert, CA 92211
USA