



# Lithium Coin Cell - CR2320J

- Reliable energy for your application
- Standard cells and customized packs
- ESD protection
- UL recognized
- Battery Certification Experts



RoHS compliant



Pb free



REACH compliant



Conflict mineral free


## Technical Data Sheet · CR2320J

### SPECIFICATIONS


Nominal Voltage	3V
Jauch part number	253247
Nominal Capacity	130 mAh
Standard Load	15 kΩ
Standard Current	0.2 mA
Max. Pulse Current	20 mA
Operating Temperature	- 30°C to + 85°C*
Weight	Approx. 3.0 gr.
Chemistry	Li/MnO <sub>2</sub>
UL1642	MH62838

\* In applications where the battery is exposed to temperatures <-20°C or >70°C, please contact Jauch.


### DIMENSION

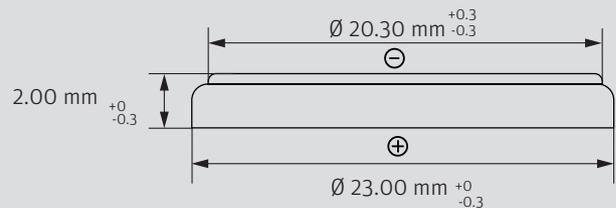


### DISCHARGE CHARACTERISTICS

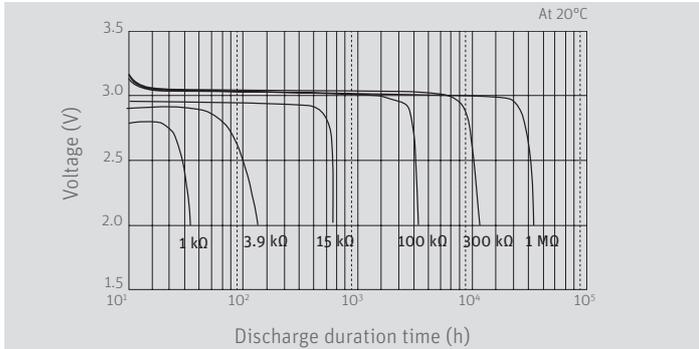


### TEMPERATURE CHARACTERISTICS

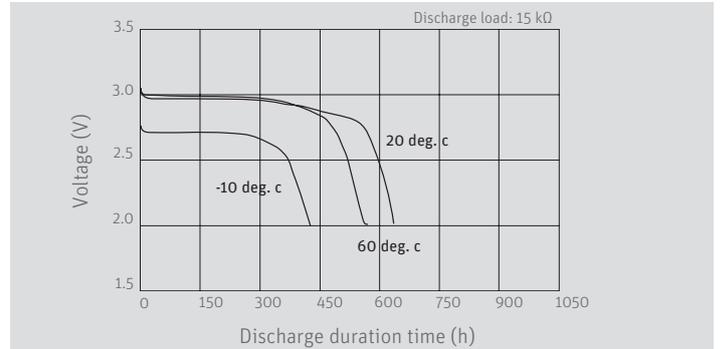

### PULSE DISCHARGE CHARACTERISTICS

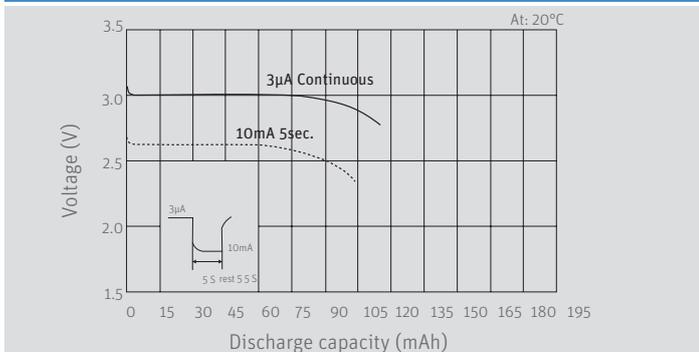

### DISCHARGE CURRENT VS. DISCHARGE CAPACITY

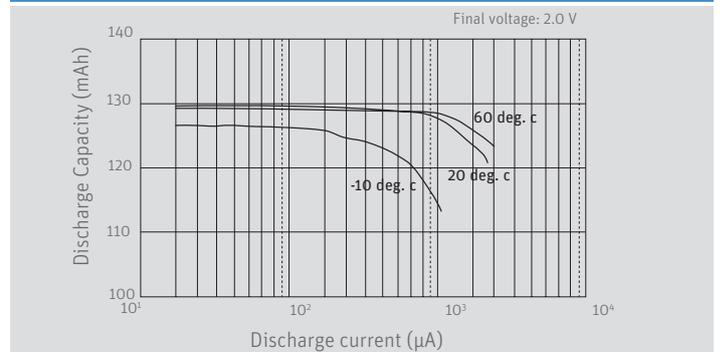

Wide assortment of mounting options, including through hole, surface mount and wire terminals.  
Contact Jauch for more information.