



Lithium Coin Cell - CR2325J

- Reliable energy for your application
- Standard cells and customized packs
- ESD protection
- UL recognized
- Battery Certification Experts



RoHS compliant



Pb free



REACH compliant



Conflict mineral free


Technical Data Sheet · CR2325J

SPECIFICATIONS


| | |
|-----------------------|---------------------|
| Nominal Voltage | 3V |
| Jauch part number | 253248 |
| Nominal Capacity | 190 mAh |
| Standard Load | 15 kΩ |
| Standard Current | 0.2 mA |
| Max. Pulse Current | 20 mA |
| Operating Temperature | -30°C to +85°C* |
| Weight | Approx. 3.3 gr. |
| Chemistry | Li/MnO ₂ |
| UL1642 | MH62838 |

* In applications where the battery is exposed to temperatures <-20°C or >70°C, please contact Jauch.


DIMENSION

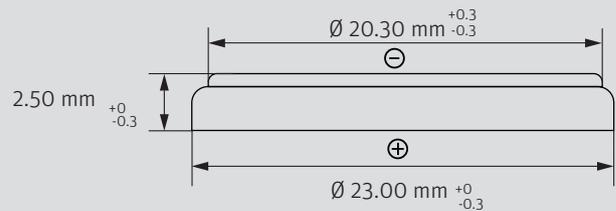


DISCHARGE CHARACTERISTICS

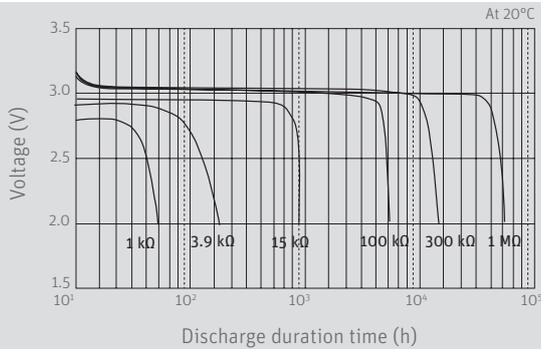


TEMPERATURE CHARACTERISTICS

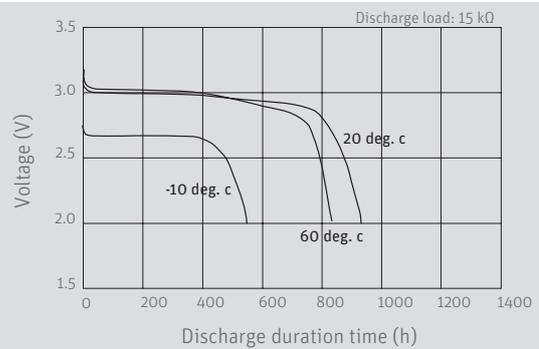

PULSE DISCHARGE CHARACTERISTICS

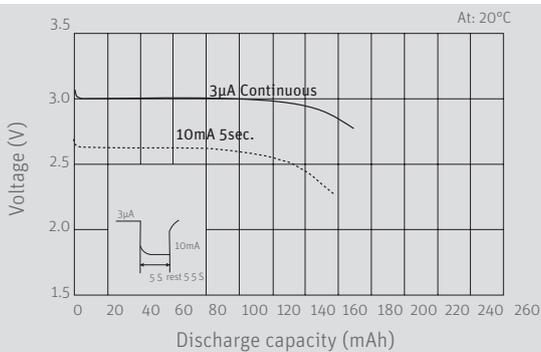

DISCHARGE CURRENT VS. DISCHARGE CAPACITY

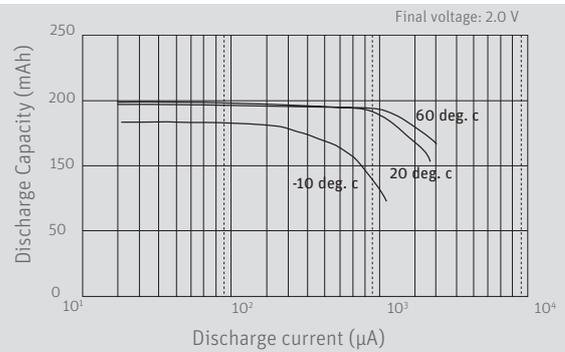

Wide assortment of mounting options, including through hole, surface mount and wire terminals.
Contact Jauch for more information.