



# Lithium Coin Cell - CR2335J

- Reliable energy for your application
- Standard cells and customized packs
- ESD protection
- UL recognized
- Battery Certification Experts



RoHS compliant



Pb free



REACH compliant



Conflict mineral free


## Technical Data Sheet · CR2335J

### SPECIFICATIONS


Nominal Voltage	3V
Jauch part number	253250
Nominal Capacity	300 mAh
Standard Load	15 kΩ
Standard Current	0.2 mA
Max. Pulse Current	20 mA
Operating Temperature	-30°C to +85°C*
Weight	Approx. 4.3 gr.
Chemistry	Li/MnO <sub>2</sub>
UL1642	MH62838

\* In applications where the battery is exposed to temperatures <-20°C or >70°C, please contact Jauch.


### DIMENSION

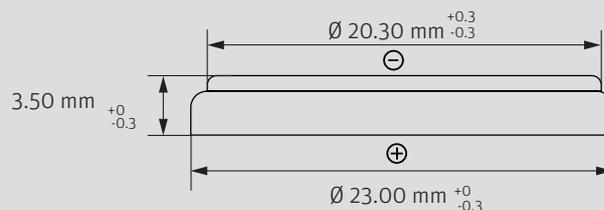


### DISCHARGE CHARACTERISTICS

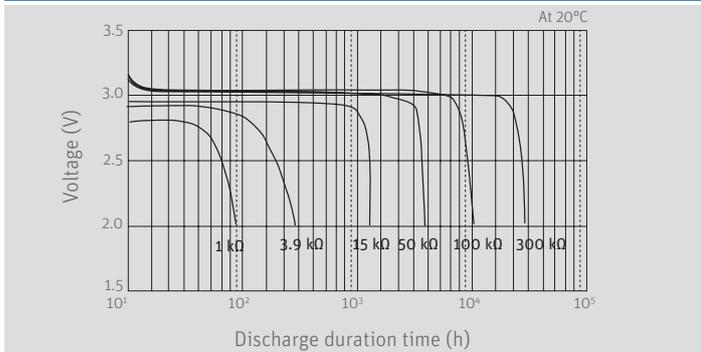


### TEMPERATURE CHARACTERISTICS

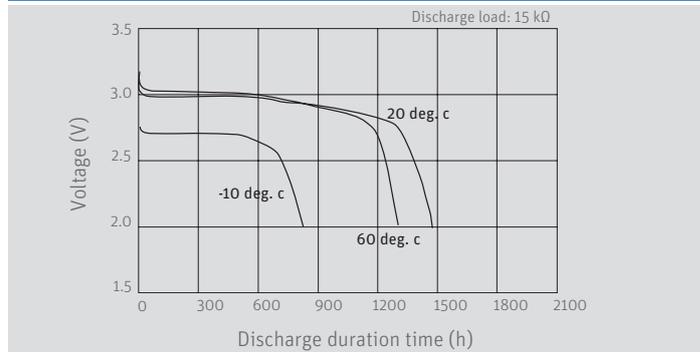

### PULSE DISCHARGE CHARACTERISTICS

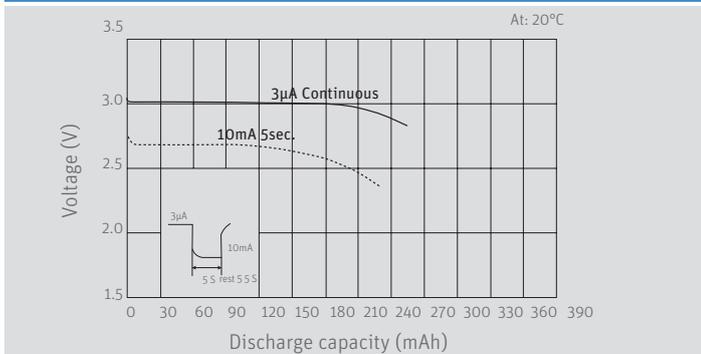

### DISCHARGE CURRENT VS. DISCHARGE CAPACITY

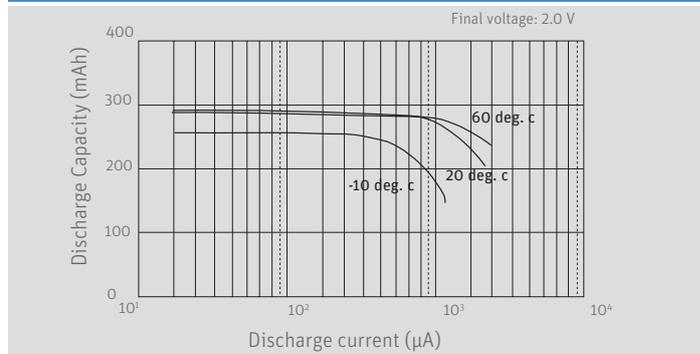

Wide assortment of mounting options, including through hole, surface mount and wire terminals.  
Contact Jauch for more information.



©JQG 2025

Jauch Quartz GmbH • e-mail: [batterytechnology@jauch.com](mailto:batterytechnology@jauch.com)  
[www.jauch.com](http://www.jauch.com)

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact JAUCH for the latest information.

02122025