



Lithium Coin Cell - CR2450JHT H3

- Designed for High Temperature Environment
- Especially for automotive devices such as TPMS or ETC
- Low self-discharge
- Long shelf life
- UN 38.3 tested
- Wide assortment of mounting options and wire terminals available



RoHS compliant



Pb free



REACH compliant




Conflict mineral free

SPECIFICATIONS


Jauch part number	253676
Nominal Voltage	3V
Nominal Capacity	550 mAh
Continuous Standard Load	7.5 kΩ
Standard Current	0.4 mA
Max. Pulse Current	25 mA
Operating Temperature	-40°C to +125°C
Weight	Approx. 6.9 g
Chemistry	Li/MnO ₂

Note: Capacity 550mAh is obtained at standard cc load to 2.0V at 23°C.


DIMENSIONS

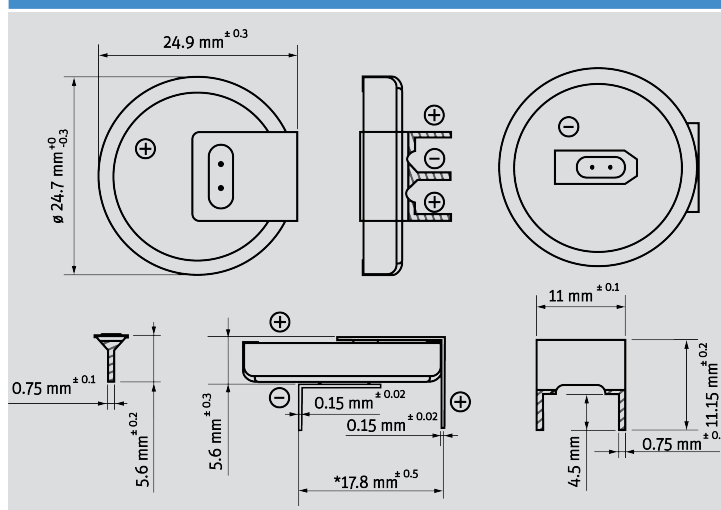


DISCHARGE CHARACTERISTICS

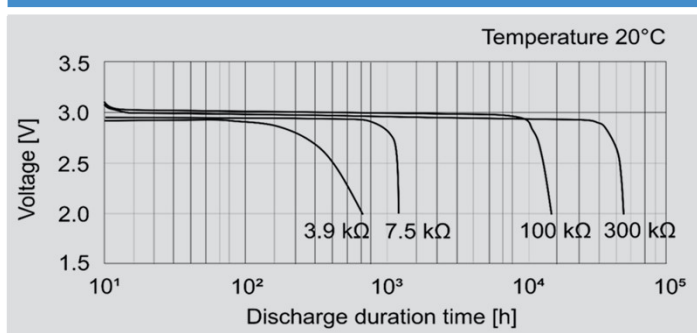

DISCHARGE CHARACTERISTICS

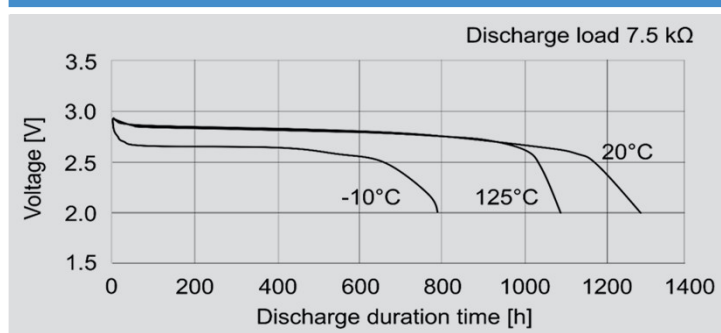

PULSE DISCHARGE CHARACTERISTICS

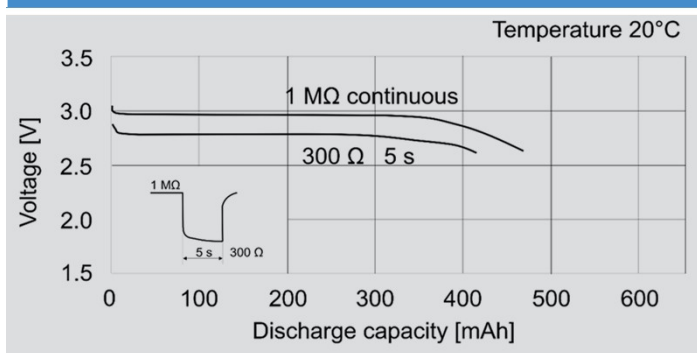

DISCHARGE CHARACTERISTICS

