



# Lithium Coin Cell - CR2032J

- Reliable energy for your application
- Standard cells and customized packs
- ESD protection
- UL recognized
- Battery Certification Experts



RoHS compliant



Pb free



REACH compliant



Conflict mineral free


## Technical Data Sheet · CR2032J

### SPECIFICATIONS


Nominal Voltage	3V
Jauch part number	253246
Nominal Capacity	245 mAh
Standard Load	15 kΩ
Standard Current	0.2 mA
Max. Pulse Current	15 mA
Operating Temperature	-30°C to +85°C*
Weight	Approx. 3.2 gr.
Chemistry	Li/MnO <sub>2</sub>
UL1642	MH62838

\* In applications where the battery is exposed to temperatures <-20°C or >70°C, please contact Jauch.


### DIMENSION

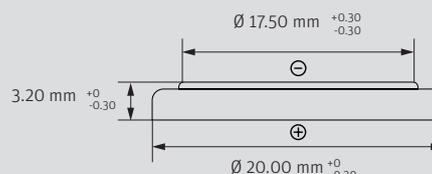


### DISCHARGE CHARACTERISTICS

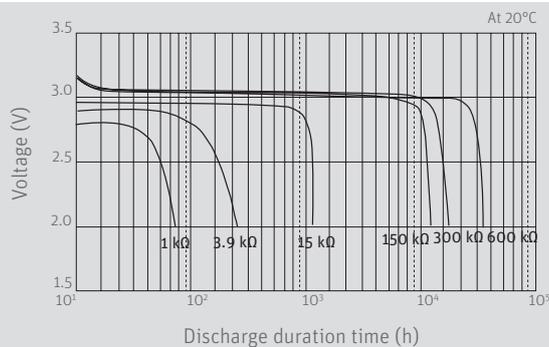


### DISCHARGE CHARACTERISTICS

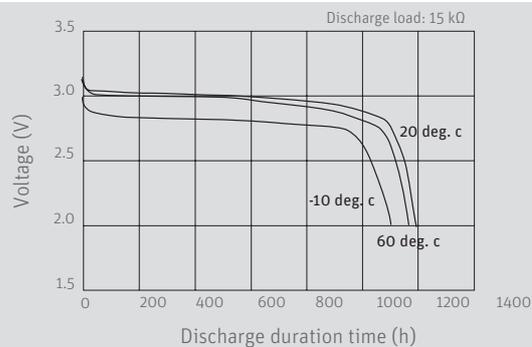

### PULSE DISCHARGE CHARACTERISTICS

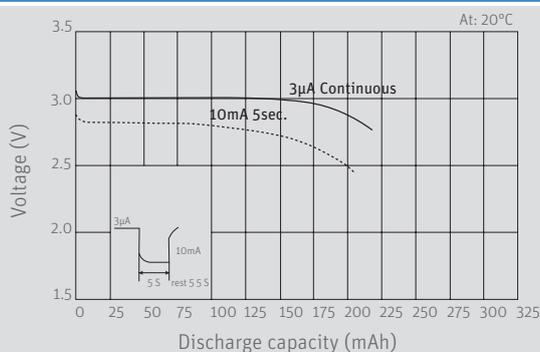

### DISCHARGE CURRENT VS. DISCHARGE CAPACITY

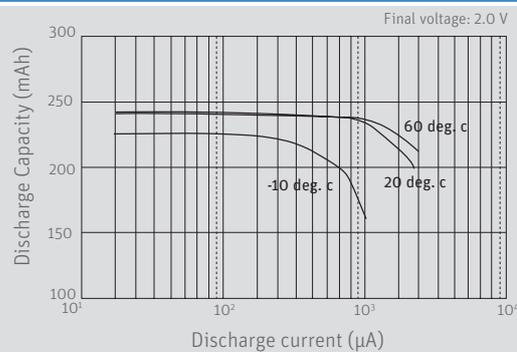

Wide assortment of mounting options, including through hole, surface mount and wire terminals.  
Contact Jauch for more information.